


SEW121F

(previously the SEW120F)

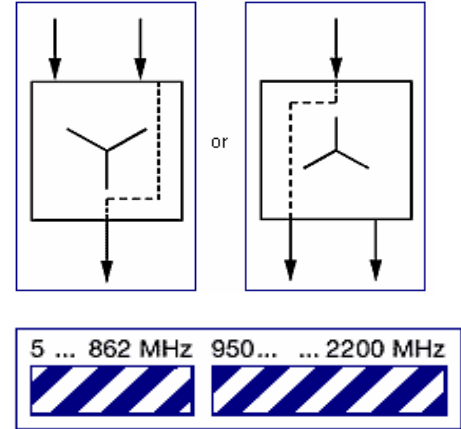

Frequency ranges

- Terr 5 ... 862 MHz
- SAT-IF 950 ... 2200 MHz

Product Dimensions

3.96" (w) x 1.81" (h) x 0.70" (d)

Product Weight

.5 lbs

Connectors

F - female

Temperature Range

-4 ... 122 F

Features:

- To combine the terrestrial signals (5 ... 862MHz) and the SAT-IF signals (950...2200MHz)
- DC through path for LNB remote power
- Can be used to diplex download cables from satellite dish
- Can be used to separate the frequencies at the TV location
- For wall or mast mounting UV resist outdoor case WSG94 is available
- All DC through paths are both DirecTV® and Dish Network® compatible

Specifications

THROUGH LOSS	Terr	1.5dB
	SAT-IF	2.5 ... 1.5dB
REJECTION	Terr / SAT	> 32dB
	SAT / Terr	> 32dB
DC THROUGH PATH	max. 20V / 1.5A	