

110 Family

100-Pair and 300-Pair Wiring Blocks

Uniprise 110 Wiring Blocks are used to terminate data and voice pairs in sizes from 26 AWG to 22 AWG (0.64 mm to 0.40 mm). They consist of 25 pair strips and come in configurations of 100 and 300 pairs. Each version is wall-mountable with legs that permit cables to be installed behind them. 110 wiring blocks are molded in fire-resistant plastic that meets applicable safety standards.

Applications:

- Telecommunications rooms, equipment rooms, main cross-connects, intermediate cross-connects, data centers

Meets/exceeds:

- Category 6/Class E requirements of ISO/IEC 11801, CENELEC EN50173-1 AND TIA/EIA 568B.2-1
- Category 5e requirements of ISO/IEC 11801, CENELEC EN50173-1 AND TIA/EIA 568B.2-1
- UL® Listed

Features:


- Index strips marked in five tip colors for fast pair location
- Sturdy and proven design and construction
- Designed to accommodate multi-unit punchdown tool (UN788H1)

Specifications

Product	Pair Size	Height	Width	Depth	Packaging
UN-110-WB-100PR	100	9.12 cm (3.6 in)	27.23 cm (10.7 in)	8.25 cm (3.2 in)	1/Pkg
UN-110-WB-300PR	300	27.41 cm (10.8 in)	27.23 cm (10.7 in)	8.25 cm (3.2 in)	1/Pkg



UN-110-WB-100PR

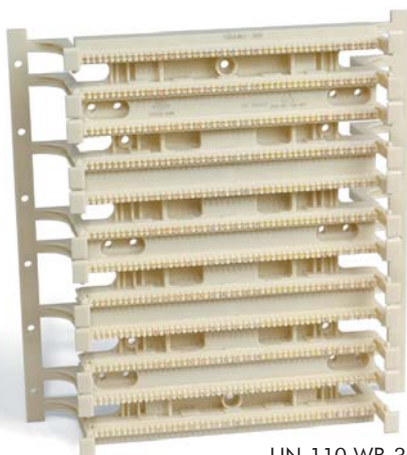

UN-110-WB-300PR

