

## 110 Family

### 110C Connecting Blocks

Uniprise 110C Connecting Blocks press directly onto 110 wiring block terminal strips. Uses insulation displacement connections for fast, secure connection of 26 AWG to 22 AWG (0.64 mm to 0.40 mm) conductors.

110C connecting blocks are molded in fire-resistant plastic that meets applicable safety standards. Color coded for easy pair identification.

110C connecting blocks come in 3-pair, 4-pair and 5-pair modularities. They are packaged in units of 10.

#### Applications:

- Telecommunications rooms, equipment rooms, main cross-connects, intermediate cross-connects, data centers

#### Meets/exceeds:

- ISO/IEC 1180, EN50173-1 and EIA/TIA 568B  
- UL® Listed

#### Features:

- Insulation displacement means no wire stripping  
- Sturdy and proven design and construction  
- Color coded for easy pair identification  
- Designed to accommodate multi-unit punchdown tool (UN788H1)

#### Physical Specifications


Product	Pair Size	Height	Width	Depth	Packaging
UN-110-CB-3P-10C	3	0.8 cm (0.3 in)	2.3 cm (1 in)	2.8 cm (1.1 in)	10/Pkg
UN-110-CB-4P-10C	4	0.8 cm (0.3 in)	3.1 cm (1.2 in)	2.8 cm (1.1 in)	10/Pkg
UN-110-CB-5P-10C	5	0.8 cm (0.3 in)	3.8 cm (1.5 in)	2.8 cm (1.1 in)	10/Pkg



UN-110-CB-3P-10C



UN-110-CB-4P-10C

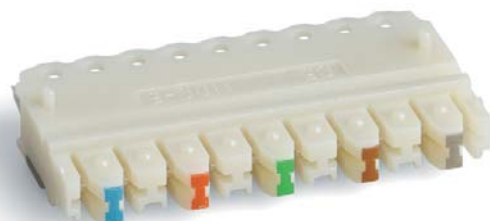

UN-110-CB-5P-10C

