



# T1 ESF CSU ACE



## Stand Alone and Smart 16 T1 Network Facility Interface

### Product Features

- Provides T1 facility interface and jitter tolerance per ANSI T1.403, T1.102 and AT&T TR 62411
- Supports B8ZS or AMI formats
- Conversion for signal formats and line coding
- Transmits unframed "All 1's" during signal loss from DTE or T1 Network
- Front Panel LCD and 4 button keypad (ACE)
- Equipment line build-out configuration 0-655 feet
- Standalone ACE package or Smart 16 single slot card
- Supports Performance Report Messages of ANSI T1.403 and AT&T 54016 maintenance messages
- Industry-leading five-year North American warranty

The ADTRAN® T1 ESF CSU™ is a full-featured T1 Channel Service Unit used to connect T1 data terminal equipment (DTE) such as a PBX, switch or channel bank to T1 facilities. Capable of interfacing to both B8ZS or AMI circuits, the T1 ESF CSU can convert signal formats or line code to integrate older equipment. The ESF CSU is designed to provide alarms, loopbacks, signal regeneration, line build-out, and surge protection, while maintaining 1's density for the DTE and T1 network.

The T1 ESF CSU ACE is suitable for wall- or rackmounting or desktop use, while the T1 ESF CSU Smart 16 Card occupies a single slot in the rackmount ADTRAN Smart 16 shelf. The standalone models provide a front panel LCD, four user keys on the front of the ACE, and provides easy configuration and unit monitoring from the front panel. The ESF CSU provides an EIA-232 port (DB-9) for provisioning through a VT100 interface. The Smart 16 ESF CSU card can be controlled from the shelf controller through a VT100 interface or the optional Datamate™. For SNMP management, the Smart 16 ESF CSU card is supported by the Smart 16e controller and the ADVISION software package.


The T1 ESF CSU provides a T1 network interface and a DSX-1 DTE connection through modular RJ48C jacks. For testing purposes, the T1 ESF CSU is capable of initiating several

built-in local and remote loopback tests and conducting stress testing of the network with built-in test patterns. For more extensive network testing, the unit uses bantam jack access for external test equipment. To aid with circuit monitoring, the T1 ESF CSU gathers AT&T maintenance information in 15 minute intervals for 24 hours, which is fully accessible over the FDL or via the Smart 16 controller.

Remote configuration is made simple by using the FDL channel for the standalone ACE or the Smart 16 controller interface for the rackmount version. Using the remote configuration capability of the T1 ESF CSU enables central site control and setup for ADTRAN T1 CSUs or TSU devices.

The standalone ACE includes an auto-ranging 12-48V internal DC power supply and wallmount AC power supply. The L2 version adds a terminal block for easier connection to an external DC supply.

For additional T1 applications, ADTRAN provides several T1 DSU/CSUs and T1 Multiplexers for combining traditional DSX-1 functionality with additional DTE ports. The TSU 100e™, TSU 120e™ and TSU 600e™ are modular T1 DSU/CSUs with embedded SNMP and are capable of supporting a single DSX-1 interface and up to 22 DTE interfaces for data or video applications.

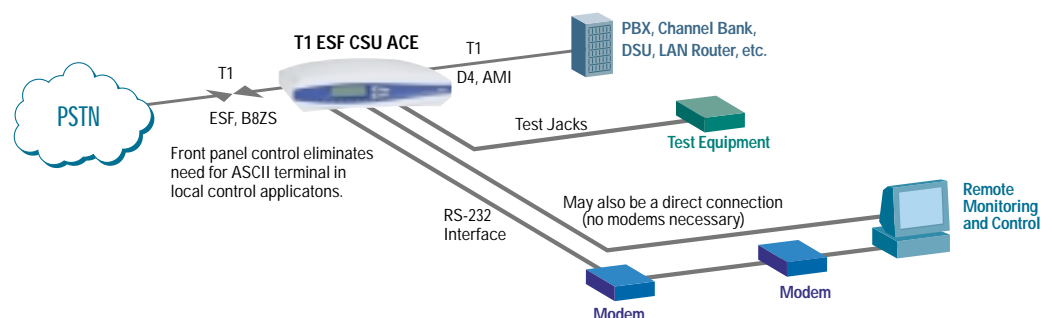



# T1 ESF CSU ACE



## Stand Alone and Smart 16 T1 Network Facility Interface

### Product Specifications

#### Network Interface

##### Line Rate

- T1/FT1 (1.544 Mbps)

##### Physical Interface

- RJ48C: 8-Pin Modular

##### Specifications

- ANSI T1.403, AT&T TR62411

##### Framing

- SF/ESF

##### Line Code

- AMI/B8ZS

##### ESF Format

- ANSI T1.403, AT&T 54016

##### Input Signal

- 0 to -36dB

##### Transmission Type

- Regenerative transparent: Network & DTE

#### User Testing

##### Local

- Payload/Line (NI), DTE (T1)

##### Remote

- Payload/Line (NI)

##### Test Patterns

- 1:8, All 0's, All 1's

#### Performance Monitoring

##### Performance Data

- BVPs/CRCs, ES, SES, UAS, %AS, %EF SEC
- Alarms, Error Rates

##### Reports

- NI information stored 24 hrs, every 15 min.

##### PRMS

- ANSI Performance Report
- Messages (User Selectable)

#### Equipment Interface

##### Compliance

- ANSI T1.403, AT&T 62411

##### Receiver Performance

- Line Build-out for 0-655 ft.

##### Keep Alive Signal

- Unframed/framed "All 1's" loss of DTE signal

#### User Options

##### Mounting

- Desktop or Wallmount (ACE)
- Single Slot in ADTRAN Smart 16 Chassis

#### Bantam Jacks

- Test Signal access to Network & DTE
- Non-interrupt signal receive: Network & DTE

#### LED Indicators (ACE)

- Power
- Alarms
- Errors
- Loopback

#### LED Indicators (SM 16)

- Status
- Net. & Eq. LOS
- Net. & Eq. AIS
- Net. & Eq. OOF
- Net. & Eq. Yellow Alarm
- Test
- Net. & Eq. Code Violation

#### Compliance

- FCC part 15, Class A, Part 68, Industry Canada CS03, UL 1459, CUL

#### Environment

##### Operating

- 0° to 50°C (32° to 122°F)

##### Storage

- -20° to 70°C (-4° to 158°F)

##### Relative Humidity

- Up to 95%, non-condensing

##### Dimensions

- ACE: 2" H x 6.5" D x 9.3" W
- Smart 16 Card: Standard ADTRAN SM 16

##### Weight

- 1 lb.

##### Power

- ACE: 12-48 VDC, 2.5W (via AC wall adapter)
- ACE (L2): Provides terminal block for DC power
- Smart 16 Card: From Smart 16 Chassis

#### Product includes

- Manual, T1 Loopback Test Adapter, and RJ45 Cable
- ACE includes AC wallmount power supply

### Ordering Information

| Equipment                          | Part #    |
|------------------------------------|-----------|
| T1 ESF CSU ACE                     | 1204025L1 |
| T1 ESF CSU ACE (DC)                | 1204025L2 |
| T1 ESF CSU Smart 16 Rackmount Card | 1202066L1 |
| HRM-1MA Shelf                      | 1200411L1 |
| VRM-7MA Shelf                      | 1200417L1 |
| Spare AC Power Supply              | 1903022L1 |

#### Accessories

|                       |           |
|-----------------------|-----------|
| HRM-1MA Shelf         | 1200411L1 |
| VRM-7MA Shelf         | 1200417L1 |
| Spare AC Power Supply | 1903022L1 |

ADTRAN, Inc.  
Attn: Enterprise Networks  
901 Explorer Boulevard  
Huntsville, AL 35806

P.O. Box 140000  
Huntsville, AL 35814-4000

256 963-8000 voice  
256 963-8699 fax

**General Information**  
800 9ADTRAN  
info@adtran.com  
www.adtran.com

#### Pre-Sales

##### Technical Support

800 615-1176 toll-free  
application.engineer@adtran.com  
www.adtran.com/support

#### Where to Buy

877 280-8416 toll-free  
channel.sales@adtran.com  
www.adtran.com/where2buy

#### Post-Sales Technical Support

888 423-8726  
support@adtran.com  
www.adtran.com/support

#### ACES Installation & Maintenance Service

888 874-ACES  
aces@adtran.com  
www.adtran.com/support

#### International Inquiries

256 963 8000 voice  
256 963-6300 fax  
international@adtran.com  
www.adtran.com/international

#### For the regional office nearest you, visit:

www.adtran.com/regional



ADTRAN is an  
ISO 9001: 2000 certified supplier.



ADTRAN is a  
TL 9000 3.0 certified supplier.

61204025L1-8A August 2004  
Copyright © 2004 ADTRAN, Inc.  
All rights reserved.

Specifications subject to change without notice. Datamate, T1 ESF CSU, TSU 100e, TSU 120e, and TSU 600e are trademarks of ADTRAN, Inc. ADTRAN is a registered trademark of ADTRAN, Inc. All registered trademarks and trademarks mentioned in this publication are the property of their respective owners.

