


SELF-AMPLIFIED WALL BAFFLE SPEAKERS

Wall Baffle Speakers

ASWB1

The ASWB1 Wall Baffle Speaker is an 8", cone-type loudspeaker, complete with a built-in amplifier and volume control, designed for telephone paging applications. It is engineered to provide excellent sound quality and trouble-free operation.



Product Features:

- Self-contained 1-watt amplifier
- Simulated walnut finish with black grille cloth on front
- Sloping front panel (13.5 degrees) provides enhanced downward dispersion
- Easy wall-mount installation (*mounting hardware included*)
- Built-in volume control
- 8" main cone speaker
- 90° dispersion pattern

Dimensions:	9-1/2" W x 9-1/2" H x 5-1/4" D
Product Weight:	4 lb.


See page 30 to select a Power Supply.

Determine Speaker Quantity

Using the chart:

1. Locate the dimensions of the room (length and width).
2. Where these two measurements meet will be the number of speakers required.
(You may need to increase the number of speakers in areas where large objects or shelving project into the coverage area, blocking sound.)
3. The number of Current Units needed is the same as the number of speakers.

Current Units (min.) = Number of Wall Mount Speakers

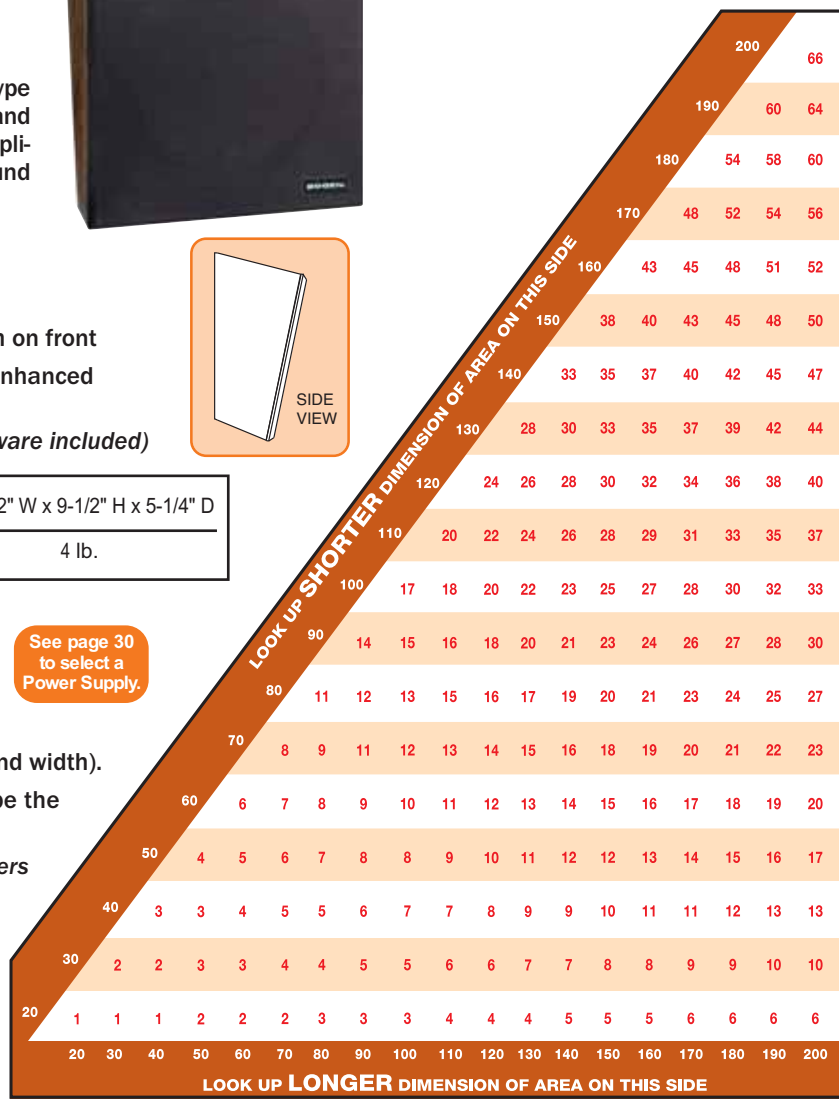

PAGING INTERFACE

Loop Start Interface/Power Supply


PRLSLI

The PRLSLI functions as both a 24V DC power supply and a loop start interface for small paging systems.



Product Features:

- 24V Talk battery supply for loop start ports
- Buffered audio output for up to 25 self-amplified speakers
- 450 mA, 24V DC power supply for external equipment
- Integral flanges and rubber feet for wall or shelf mounting
- 6-terminal barrier strip
- UL and C-UL listed

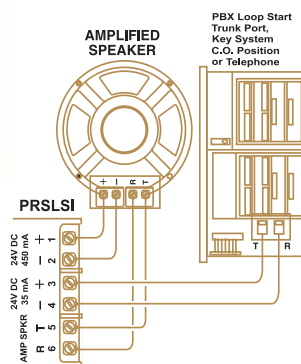

Loop Start Interface

Both the audio and power connections from self-amplified speakers can be connected to the PRLSLI. Connect the Tip and Ring terminals of the PRLSLI to a loop start trunk to provide paging access. The PRLSLI provides 9 CU (450 mA) of regulated 24V DC power for self-amplified speakers and enough audio capacity to drive 25 self-amplified speaker inputs.

Dimensions:	2-3/4" W x 4-1/2" H x 2-1/2" D
Product Weight:	3 lb.