



1100 CommScope Place SE
 PO Box 1729
 Hickory, NC 28603-1729
 (800) 982-1708
 (828) 324-2200
 (828) 328-3400
 www.commscope.com



Fax:
 Int'l Fax:

RG-6 Dual 3 GHz 75 Ohm Coaxial Cable Catalog # 5773 NEC/CEC: CM(ETL)C(ETL) CMH


CABLE CONSTRUCTION:

CENTER CONDUCTOR:
 18 AWG Bare Copper
 Nom. Dia: 0.0403"

DIELECTRIC:
 Foam Polyethylene
 Dia. over Dielectric: 0.180" Nom.

SHIELD:
 Foil: Aluminum/Poly/Aluminum Tape
 Braid: 34 AWG Aluminum
 60% Coverage Nom.
 Nom. Dia. 0.212"

JACKET:
 FR-PVC
 Dia. over Jacket: 0.272" +/- 0.008"
 Nominal Jacket Thickness: 0.030"
 Minimum Spot: 0.024"
 Web Height: 0.030" Nom.
 Web Width: 0.015" Nom.
 Overall Width: 0.575" Nom.

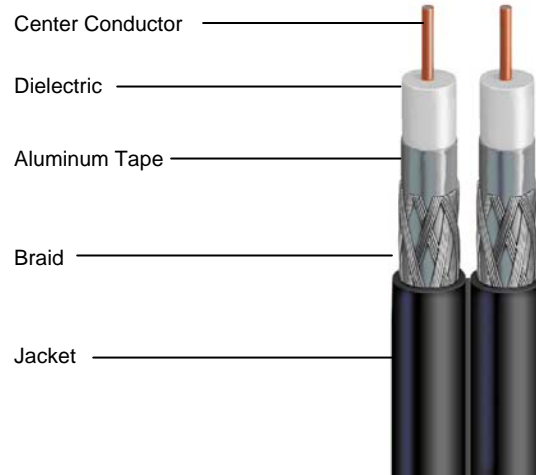

ELECTRICAL PROPERTIES:

SPARKER TEST: 4000 VAC
DIELECTRIC STRENGTH: Conductor to Shield: 2500 VDC
CAPACITANCE: 16.0 pF./Ft. Nom.
IMPEDANCE: 75.0 +/- 3.0 Ohms
VELOCITY OF PROPAGATION: 84.0% Nom.
DCR: Conductor: 6.5 Ohms/1000 FT. Nom.
 Shield: 9.7 Ohms/1000 FT. Nom.
SRL: 20 dB (5 thru 1000 MHz) 100% Swept Tested
 15 dB (1000 thru 3000 MHz) 100% Swept Tested

MECHANICAL PROPERTIES:

Cable Weight/kft: 58 lbs
MINIMUM BEND RADIUS:
 Loaded: 20 Times Cable OD
 Unloaded: 10 Times Cable OD
CABLE TEMP. RATING:
 Temp: 60°C

ATTENUATION:

dB/100 FT. (NOM.)	@ FREQUENCY MHz
0.25 dB	1 MHz
0.66 dB	10 MHz
1.41 dB	50 MHz
1.92 dB	100 MHz
2.64 dB	200 MHz
3.73 dB	400 MHz
5.05 dB	700 MHz
5.79 dB	900 MHz
6.11 dB	1000 MHz
6.73 dB	1200 MHz
7.49 dB	1450 MHz
8.43 dB	1800 MHz
9.35 dB	2200 MHz
9.46 dB	2250 MHz
10.92 dB	3000 MHz

