


Locking Devices

15 AMP Locking Devices

15 AMP 250V 2-Pole 3-Wire Grounding

| DESCRIPTION | CAT. NO. | CORD DIA. (inches) | WIRE GAUGE (stranded) | NEMA CONFIG. |
|---|-----------|-----------------------|--------------------------|-----------------|
| Duplex Flush Receptacle, Self Grounding, Back and Side Wired | 4550 | | | |
| Duplex Flush Receptacle, Isolated Ground, Back and Side Wired | 4550-IG | | | |
| Single Flush Receptacle | 4560** | | | |
| Single Flush Receptacle, w/Short Strap | 4560-SS | | | |
| Single Flush Receptacle, Isolated Ground | 4560-IG** | | | |
| Single Flush Receptacle, Isolated Ground, w/Short Strap | 4560-SIG | | | |
| Locking Plug, Black Nylon Body | 4570-C | .245-.700 | 10-18 | L6-15R |
| Angle Locking Plug, Black Nylon Body | 4570-CA | .245-.700 | 10-18 | L6-15P |
| Locking Plug, Yellow Nylon Body | 4570-CY | .245-.700 | 10-18 | |
| Locking Connector, Black Nylon Body | 4579-C | .245-.700 | 10-18 | |
| Locking Connector, Yellow Nylon Body | 4579-CY | .245-.700 | 10-18 | |
| Locking Flanged Outlet | 4585-C | | | |
| Locking Flanged Inlet | 4586-C | | | |



4570-CA



4579-C

SPECIFICATIONS & FEATURES

- Locking Receptacles feature a complete range of ratings and NEMA configurations, including isolated ground and non-grounding
- Locking Plugs and Connectors feature heavy-duty construction for top performance in the environmental extremes of grueling industrial settings
- Flanged Inlets and Outlets are built to endure hard use with rugged nylon flanges that assure a smooth, flush fit and outstanding resistance to cracking and breaking

TESTING & CODE COMPLIANCE

- All receptacles, plugs, connectors, inlets and outlets are designed to meet NEMA WD-6, and ANSI C-73, and to meet/exceed UL 498 standards
- UL Fed Spec. Listed WC-596 (File #E-13399 — Cat. Nos. 4550, 4560, 4585-C, 4750, 4760, 4785-C; File #E-13393 — Cat. Nos. 4570, 4579, 4586-C, 4770, 4779, 4786-C)
- CSA Certified (File #LR-406)
- NOM Certified (#057)
- Backed by a Lifetime Warranty

MATERIAL CHARACTERISTICS


Environmental: Flammability per UL94 or CSA C22/06 Requirements
Operating Temperature: -40°C to 60°C

15 AMP 277V 2-Pole 3-Wire Grounding


| DESCRIPTION | CAT. NO. | CORD DIA. (inches) | WIRE GAUGE (stranded) | NEMA CONFIG. |
|---|-----------|-----------------------|--------------------------|-----------------|
| Duplex Flush Receptacle, Self Grounding, Back and Side Wired | 4750 | | | |
| Duplex Flush Receptacle, Isolated Ground, Back and Side Wired | 4570-IG | | | |
| Single Flush Receptacle | 4760** | | | |
| Single Flush Receptacle, w/Short Strap | 4760-SS | | | |
| Single Flush Receptacle, Isolated Ground | 4760-IG** | | | |
| Single Flush Receptacle, Isolated Ground, w/Short Strap | 4760-SIG | | | |
| Locking Plug, Black Nylon Body | 4770-C | .245-.700 | 10-18 | L7-15R |
| Angle Locking Plug, Black Nylon Body | 4770-CA | .245-.700 | 10-18 | L7-15P |
| Locking Plug, Yellow Nylon Body | 4770-CY | .245-.700 | 10-18 | |
| Locking Connector, Black Nylon Body | 4779-C | .245-.700 | 10-18 | |
| Locking Connector, Yellow Nylon Body | 4779-CY | .245-.700 | 10-18 | |
| Locking Flanged Outlet | 4785-C | | | |
| Locking Flanged Inlet | 4786-C | | | |




**Uses stainless steel wallplate, Cat. No. 84004-40. For additional wallplate selections, please see Section G.
For Corrosion Resistant Locking Devices, please check pages K2-K5
Weather-Resistant Boots for 15A Locking Plugs and Connectors are listed on page J20
All devices are UL Listed and CSA certified.



SUGGESTED PANEL
OPENING FOR 15A,
20A STRAIGHT BLADE
AND 15A LOCKING
FLANGED INLETS
AND OUTLETS

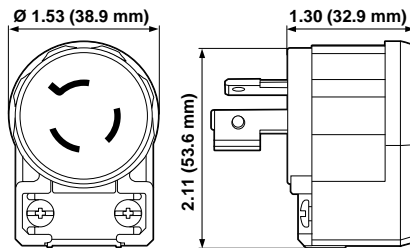

ANGLE LOCKING PLUG
Cat. No. 4570-CA

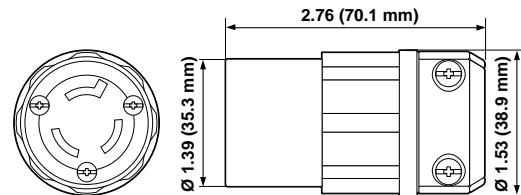

LOCKING CONNECTOR
Cat. No. 4579-C