

# Security Cable

## Catalog #S222USTP

### NEC/CEC: CMP(ETL) C(ETL)


#### CABLE CONSTRUCTION:

**CENTER CONDUCTOR:**  
 22 AWG Bare Copper Stranded

**INSULATION:**  
 Plenum PVC  
 Nom. Wall: 0.009"  
 Dia. over Insulation: 0.047"  
 Black and Red

**SHIELD:**  
 UnShielded

**JACKET:**  
 Gray PVC  
 Dia. over Jacket: 0.126"  
 Nominal Jacket Thickness: 0.015"

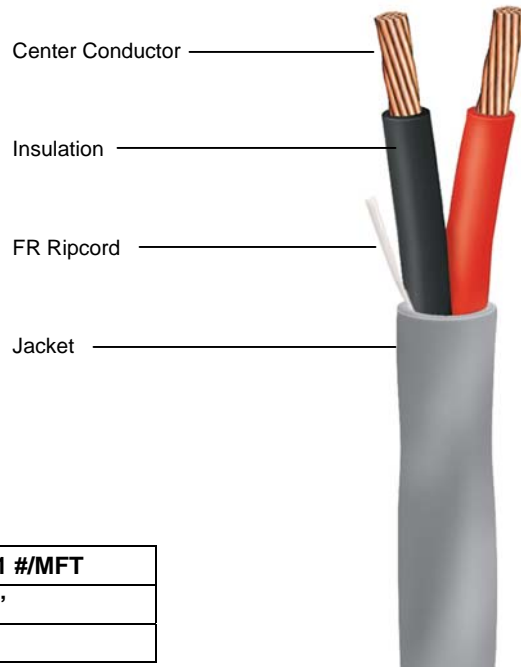

#### MECHANICAL SPECIFICATION

Cable Weight	9.41 #/MFT
Minimum Bend Radius	1.3"
Operation Temperature -20°C to 75°C	

#### ELECTRICAL PROPERTIES:

**OPERATING VOLTAGE:** 300 VRMS  
**MAX CONDUCTOR DCR:** 17.0 Ohms/MFT  
**CAPACITANCE:** 28.0 pF/Ft. Nom.  
**FLAME TEST:** CMP NEC ART 800

#### FEATURES & BENEFITS:

Virgin materials  
 Footage marking  
 CMP per NEC Article 800  
 Pure copper conductors  
 Custom colors, print, lengths available  
 (minimum order quantities apply)

#### APPLICATIONS:

Commercial audio  
 Security systems  
 Power limited controls  
 Sound & audio  
 Intercom/PA systems  
 Broadcast  
 Nurse call