

FASTTRAC™ FLOOR SUPPORTS for CPI FastTrac Cable Tray

KEY FEATURES

- Provide underfloor support for FastTrac Cable Tray.
- Easy to install, add-anywhere supports.
- Quick attachment of FastTrac Cable Tray.

APPLICATIONS


- Provide support for FastTrac Cable Tray under the raised floor in the data center.
- Under Floor Supports attach tray to building floor structure or raised floor pedestals.

USE WITH

- FastTrac Cable Tray
- FastTrac Wall Supports
- FastTrac Rack Support Bracket
- FastTrac Splices and Fasteners
- FastTrac Ground Washer
- FastTrac Pedestal Clamp or 3/8" floor attachment hardware

RELATED ACCESSORIES

- FastTrac Ceiling Supports
- FastTrac Wall Supports
- FastTrac Rack Support Bracket
- FastTrac Splices and Fasteners
- FastTrac Accessories
- FastTrac Installation Tools

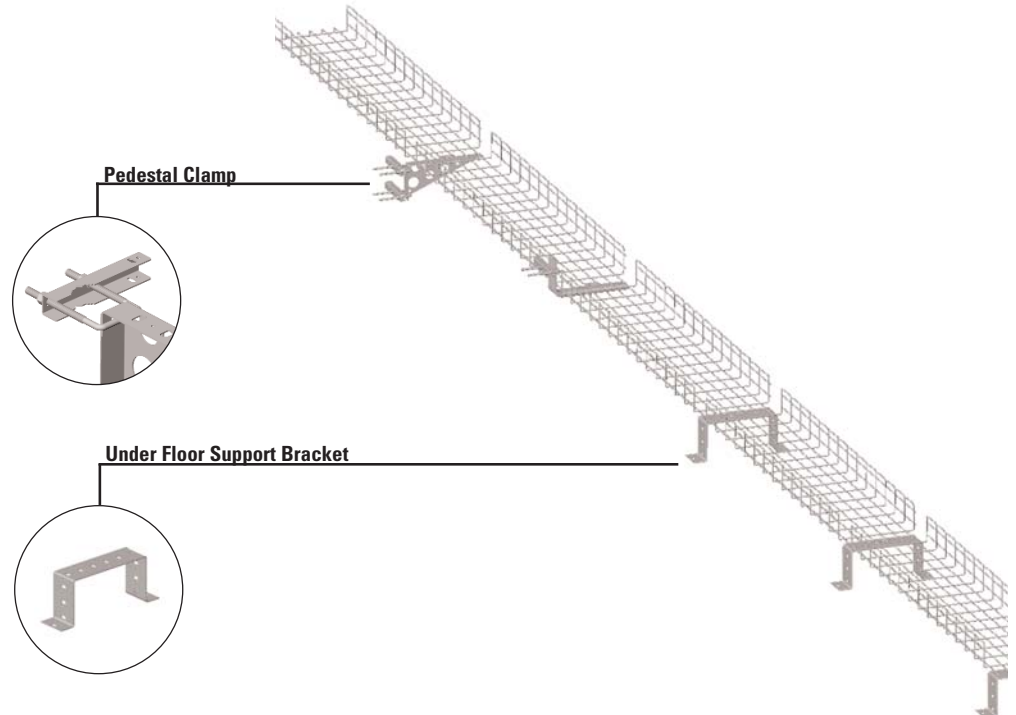

FastTrac™ Cable Tray may be used under raised floors in data centers to create point-to-point pathways for communications cabling.

FastTrac Under Floor Support Brackets attach directly to the concrete sub-floor and are ideal where floor depth is minimum or where tray supports must be independent of floor support structure. Under Floor Support Brackets are 12" or 20" wide and 3", 6" or 9" high. Place a support every 5-foot of span.

FastTrac Trapeze (Ceiling) Support Bracket, FastTrac L (Wall Support) Bracket, and FastTrac Triangle (Wall Support) Bracket can be attached to raised floor pedestals with the FastTrac Pedestal Clamp.

FastTrac Trapeze Supports Brackets are flat bars in various lengths. Use the 24" wide bracket with two pedestal clamps to create a support for one or multiple cable trays in between two adjacent raised floor pedestals.

FastTrac L Support Bracket and FastTrac Triangle Support Bracket attach to the floor pedestal with a single pedestal clamp each and each hold a single cable tray. Triangle Support Bracket can also hold electrical conduit or EMT.

Use FastTrac Ground Washer to attach FastTrac Cable Tray to the supports. FastTrac Ground Washer creates a continuous bond between tray sections.

Products are listed on the reverse. Contact CPI Technical Support (800-834-4969) for configuration assistance.

SPECIFICATIONS

FastTrac Under Floor Support Bracket

- Supports a single tray
- Use one support every 5' of span
- Widths: 12" or 20"
- Heights: 3", 6" or 9" (does not include height of cable tray)
- Material: 12 GA Steel
- Construction: Formed
- Finish: Pre-galvanized before fabrication
- Installation requires (2) 3/8" concrete anchors and hardware (not included)

FastTrac Pedestal Clamp

- Attaches support brackets listed below to raised floor pedestal
- Use with 1", 1-1/4" or 1-1/2" square or 2" round pedestals
- Each Pedestal Clamp includes:
 - (1) U-bolt, 2-1/2" C-C x 4-1/4" L with 1/4"-20 x 2-3/4" L threads
 - (1) 4" x 1" x 1" Pedestal bracket
 - (2) 1/4"-20 serrated nuts
- Material: 14 GA Steel
- Construction: Formed
- Finish: Pre-galvanized before fabrication

FastTrac Trapeze Support Bracket

- Supports single or multiple trays
- Use one support every other floor pedestal
- Width: 24"
- Material: 12 GA Steel
- Construction: Formed
- Finish: Zinc Electroplated after fabrication
- Installation requires (2) Pedestal Clamps and 1/4" hardware (not included)

FastTrac L Support Bracket

- Supports a single tray
- Use one support every other floor pedestal
- Widths: 4", 8" 12", 16", 20", 24"
- Height: Varies with width
- Material: 12 GA Steel
- Construction: Formed
- Finish: Zinc Electroplated after fabrication
- Installation requires (1) Pedestal Clamp (not included)

FastTrac Triangle Support Bracket

- Supports a single tray
- Use one support every other floor pedestal
- Widths: 4", 8" 12", 16", 20", 24"
- Height: Varies with width
- Supports Conduit Sizes 1/4" - 1-1/2" (list quantity and trade sizes)
- Material: 14 GA Steel
- Construction: Formed
- Finish: Zinc Electroplated after fabrication
- Installation requires (1) Pedestal Clamp (not included)

FastTrac Ground Washer

- Used to secure tray to supports
- Sold in pack of 50 each
- Each splice kit includes:
 - (1) 1/4"-20 x 1" self-threading machine screw
 - (1) 2" square splice washer
- One Ground Washer per Floor Support
- Material: 14vGA Steel
- Construction: Formed
- Finish: Pre-galvanized before fabrication

FastTrac Under Floor Support Bracket



FastTrac Triangle Support Bracket and (1) FastTrac Pedestal Clamp



FastTrac Trapeze Support Bracket



FastTrac L Support Bracket



ORDERING INFORMATION

FastTrac Floor Supports for CPI FastTrac Cable Tray		
Part Number	Description	Shipping Weight
13350-012	Under Floor Support Bracket, 3"H x 12"W	4 lb
13350-020	Under Floor Support Bracket, 3"H x 20"W	5 lb
13351-012	Under Floor Support Bracket, 6"H x 12"W	5 lb
13351-020	Under Floor Support Bracket, 6"H x 20"W	5 lb
13352-012	Under Floor Support Bracket, 9"H x 12"W	5 lb
13352-020	Under Floor Support Bracket, 9"H x 20"W	6 lb
13374-001	Pedestal Clamp, Each	1 lb
13353-024	Trapeze Support Bracket, 24"W	3 lb
13355-004	L Support Bracket, 4"W	1 lb
13355-008	L Support Bracket, 6"W-8"W	2 lb
13355-012	L Support Bracket, 12"W	2 lb
13355-016	L Support Bracket, 16"W	3 lb
13355-020	L Support Bracket, 18"W-20"W	3 lb
13355-024	L Support Bracket, 24"W	4 lb
13356-004	Triangle Support Bracket, 4"W	1 lb
13356-008	Triangle Support Bracket, 6"W-8"W	1 lb
13356-012	Triangle Support Bracket, 12"W	2 lb
13356-016	Triangle Support Bracket, 16"W	2 lb
13356-020	Triangle Support Bracket, 18"W-20"W	3 lb
13356-024	Triangle Support Bracket, 24"W	4 lb
13361-001	Ground Washer, 50 Pack	7 lb

Note: Dimensions are nominal