


# Product Information Sheet

## 2" (50 MM) DIAMETER FIBER MANAGEMENT SPOOLS

Use the 2" (50 mm) Diameter Fiber Management Spool to support fiber and copper cables within CPI's extensive line of vertical cabling sections. The spools meet EIA/TIA bend radius requirements and minimize cable tangles and tears for more efficient data transmission.

- Provides proper cable support and bend radius for more efficient data transmission
- Maintains strength under heavy cable loads
- Mounts to all CPI vertical cabling sections 6"W (150 mm) or wider, including MCS, MCS-EFX, CCS, CCS-EFX, VCS and GVCS

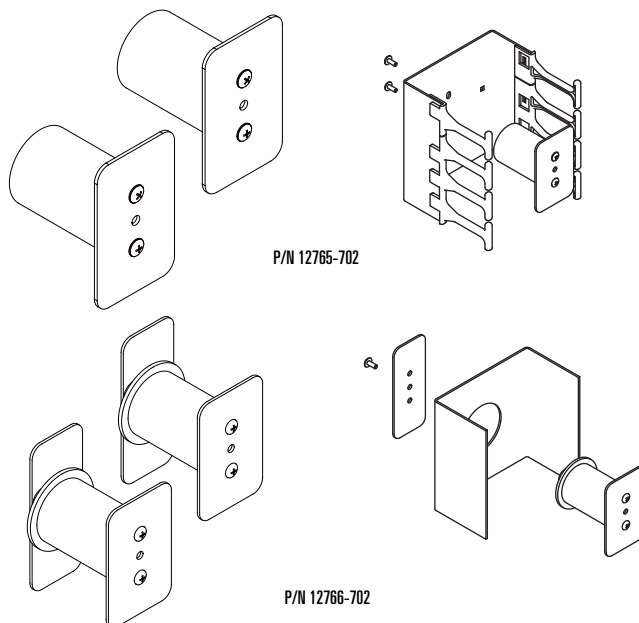

Part Number	Application	Package Of	Shipping Weight
12765-702	For GVCS	2	2 lb (0.9 kg)
12765-706	For GVCS	6	3 lb (1.4 kg)
12766-702	For 6"W, 10"W or 12"W (150 mm, 250 mm or 300 mm) Double-Sided Cabling Sections	2	2 lb (0.9 kg)
12766-707	For 6"W, 10"W or 12"W (150 mm, 250 mm or 300 mm) Double-Sided Cabling Sections	7	5 lb (2.3 kg)

800-834-4969 in U.S. & Canada • [www.chatsworth.com](http://www.chatsworth.com)



CHATSWORTH PRODUCTS, INC.

©2009 Chatsworth Products, Inc. All rights reserved. CPI, CPI Passive Cooling, Saf-T-Grip, Seismic Frame, SlimFrame and MegaFrame are federally registered trademarks of Chatsworth Products, Inc. Cube-iT Plus, Evolution, OnTrac, QuadraRack, Simply Efficient and TeraFrame are trademarks of Chatsworth Products, Inc. All other trademarks belong to their respective companies. 10/09