HOB-331-D SERIES

Rugged Weather Resistant Open Enclosure Telephones Built to Last

CEECO HOB-331 Series is an open enclosure, weather resistant, telephone that is designed for both indoor and outdoor areas that are not exposed directly to the elements. The HOB-331 telephone series is available with a keypad (dial), call restrictions, autodial, or ring-down. The telephones are constructed of 16 gauge brushed stainless steel in a power coated steel housing and are equipped with a 32" armored cord handset, marine quality chrome mechanical hookswitch and keypad (F model), I.D. window or optional volume control push button with built-in background noise reduction and tamper resistant hardware. The HOB housing is available in black or red and has a emblem of a handset on both sides of housing. CEECO's HOB-

331 Series speakerphone provides dependable communication for your courtesy, emergency, or customer service applications and is built to last!





FEATURES

- Designed for rugged indoor and protected outdoor environments
- Powder coated steel housing and stainless steel speakerphone
- Available with keypad, call restrictions, autodial, or ring-down
- I.D. window or optional "Volume" control pushbutton in place of I.D. window
- 32" black hearing aid compatible armored cord handset, other lengths and colors available
- HOB housing available in black or red
- Analog or VoIP, Line Powered
- 1 Year Warranty

MODELS	
Visias array Intermet Drestagel V	Iorgion

HOB-331-D Vandal resistant, stainless steel panel telephone, with automatic dialer, 32" armored cord Lexan handset in a b weather resistant, open enclosure wall mount housing.	olack

- HOB-331-D2 HOB-331-D2: Vandal resistant, stainless steel panel telephone, with automatic dialer and provides ability to dial a second number if the first number does not answer, 32" armored cord Lexan handset in a black weather resistant, open enclosure wall mount housin
- **HOB-331-F** Vandal resistant, stainless steel panel telephone, chrome tone keypad, and 32" armored cord Lexan handset in a black weather resistant, open enclosure wall mount housing.
- HOB-333-F Vandal resistant, stainless steel panel telephone with chrome tone keypad, speed dial only or call restrictions and speed dial software, 32" armored cord Lexan handset, in a black weather resistant, open enclosure wall mount housing.
- HOB-331-X Vandal resistant, stainless steel panel telephone, with ring-down operation, 32" armored cord Lexan handset in a black weather resistant, open enclosure wall mount housing.
- **-R** Suffix added to phone for HOB housing to be RED instead of black.
- -M Magnetic hookswitch
- **-BR** Equipped with Braille EMER (emergency) plate
- -IVC Internal built in volume control and background noise reducer installed in stainless steel faceplate ID window
- -ACH** Different length handsets available.
 - Example: HOB-331-D-ACH72 (telephone with 72" length handset)
- **-PBVC** Pushbutton volume control handset
- **-C** Background noise reducer handset






Providing Telecommunication Solutions Since 1930

Communication Equipment	519 SW Park Street
& Engineering Company	Okeechobee, FL 34972
http://www.ceeco.net	Voice 863-357-0798
Email: sales@ceeco.net	Fax 863-357-0006

SPECIFICATIONS

PRODUCT MANUALS WITH FULL FEATURES AND FUNCTIONS AVAILABLE UPON REQUEST

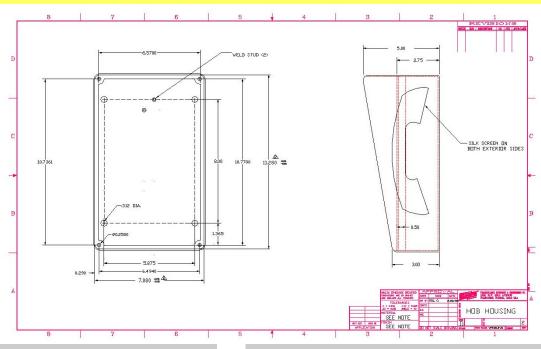

SPECIFICATIONS

INPUT POWER: C.O. LINE POWERED LOOP CURRENT: 23ma. min. 80ma. max

IMPEDANCE: 600 Ohms

SIGNALING: DTMF, 70ms tone, 50ms spacing

OUTPUT: -4.0 to -6.0dbm ENVIRONMENTAL: Temperature:

-30°C (-22°F) to 90°C (194°F) Humidity 0%-90%non-condensating

PROGRAMMING: Via DTMF keypad.

RINGER EQUIVALENCY: 0.7A

FACEPLATE: Brushed 16 ga. Stainless Steel
DIMENSIONS: 11 1/4"H x 7 1/16"W x 2 7/8" D
11 1/2"H x 7 1/4"W x 5"D (top)

MOUNTING: Surface/wall Mount

WEIGHT: 10 lbs.
MEMORY RETENTION: Non-volatile
TYPE JACK: RJ11C
UL LISTED NO.: 6OF5

ACCESSORIES:

301-064 Security Tool

(required for installation)

WARRANTY POLICY

GENERAL

CEECO guarantees its products to be free from defects in material and workmanship for a period of 365 days from the date of original purchase. CEECO's obligation under this warranty is limited to repair or replacement of any part found to be defective by CEECO.

UNDER NO CIRCUMSTANCES shall CEECO be liable for loss, damage, cost of repair or consequential damages of any kind, which have been caused by neglect, abuse or improper operation of equipment.

CEECO will repair or replace any unit during this period if found to be defective for reasons other than abuse and improper use or improper installation. It is the buyer's responsibility to return the defective unit to the factory. CEECO will then repair or replace any defective parts and return them to the buyer free of charge. CEECO will continue to offer repair service for the life of the product.

CEECO has been providing telecom solutions since 1930. Our vandal resistant technology focuses on providing public communication solutions while reducing replacement and repair costs, lowering the customer's total cost of ownership. CEECO also offers custom design and branding to your specifications. Our commitment to providing expert service and support extends beyond the warranty of our product.

We offer service for the life of the product!

CEECO is devoted to giving you the quality and service you deserve.



Providing Telecommunication Solutions Since 1930

Communication Equipment	519 SW Park Street
& Engineering Company	Okeechobee, FL 34972
http://www.ceeco.net	Voice 863-357-0798
Email: sales@ceeco.net	Fax 863-357-0006