





Straight Blade Receptacles



Side Wired 15 AMP 125 and 250V

20 AMP 125 and 250V (Basic Cat. No. Denotes Brown Device*)

DESCRIPTION	CAT. NO./COLOR 15A/125V	CAT. NO./COLOR 15A/250V	CAT. NO./COLOR 20A/125V	CAT. NO./COLOR 20A/250V
	5-15R 	6-15R 	5-20R 	6-20R 
Duplex Receptacle	CR15 I, W, GY, E, A	5028* I	CR20 I, W, GY, E, A	5822* I, W
Duplex Receptacle	CR15-C*	—	—	—
Duplex Receptacle, Smooth Face	CRO15 I, W, GY	—	CRO20 I, W, GY	—
Single Display Receptacle, Brass Plate, Brass Finish	5250 Brass	—	—	—
Duplex Receptacle, on 4" Cover*	5042 Zinc plated steel	—	—	—
Single Receptacle	5015 I, W, A	5029 I	5801 I, W, A	5821 I, W, A
Single Receptacle on 4" Cover	5059 Zinc plated steel	—	—	—
Duplex Receptacle with Pigtail Leads*	5040 I, (No Brown)	—	5340 I	—
Floorbox assembly w/Solid Brass Floorplate	5249-FBA Brass	—	5349-FBA Brass	—
Floorbox Plug	5249-CAP Brass	—	—	—
Single Receptacle, Short Strap, 8-32 Tapped Mounting Holes on 1 3/4" Centers	5258-SS E Only	5658-SS E Only	—	5458-SS E Only
Single Receptacle, Short Strap, 8-32 Tapped Mounting Holes on 1 15/16" Centers	5284-SS E Only	—	—	—
Duplex Receptacle, Less Plaster Ears	—	—	5800-4 I	—
Tamper Resistant Duplex Receptacle	CR15S-G I, W (No Brown)	—	—	—

*Canadian version

All devices are UL Listed. Also CSA Certified except where indicated by*

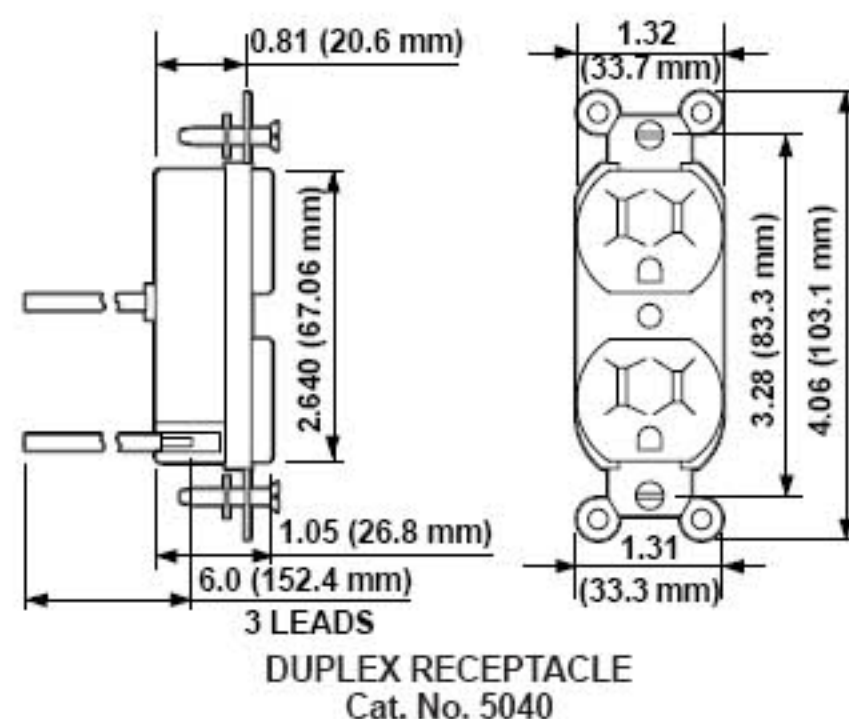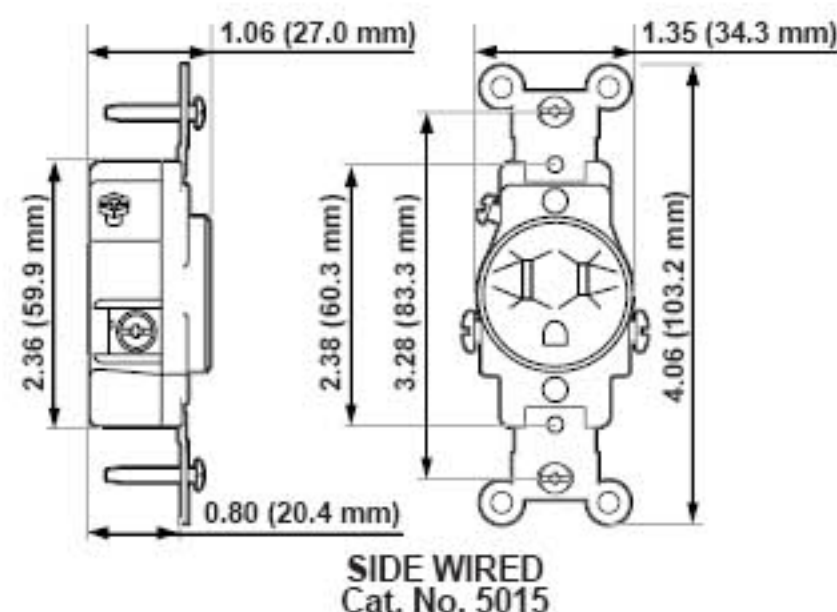

SPECIFICATIONS & FEATURES

- Large-head terminal screws, backed out and staked, accept No. 10 copper or copper-clad wire
- All power contacts are triple wipe for maximum conductivity and plug retention — except CR series
- Heavy-gauge, rust-resistant steel mounting strap
- Shallow design for maximum wiring room in box
- Convenient washer-type break-off plaster ears for best flush alignment
- Captive mounting screws for fast installation where applicable

5249-FBA, 5349-FBA & 5250

- Complies with NEC 370-27(b)
- All-in-one, ready-to-wire unit provides quick, easy installation
- Plate gasket and O-ring combine to seal out moisture and contaminants (5249-FBA)
- Thick brass plate and screw cap resist abuse and prevent contaminant from entering device
- Durable nylon face and body resist breakage
- Brass screw cap threaded to fit flush to plate
- Green grounding screw

TESTING & CODE COMPLIANCE

- UL Listed 498 (File #E-13399)
- CSA Certified where applicable (File #LR-406)
- NOM Certified (#057)
- Meets or exceeds NEMA WD-1, and -6, and ANSI standards
- Backed by a Limited 10-Year Warranty
- 5249-FBA & 5250
- Meets UL #498 requirements
- CSA Certified (#42)

*COLOR

Basic Cat. Nos. shown above denote Brown color device. For other color selections, add suffix to the catalog number as follows: Ivory (-I), White (-W), Almond (-A), Gray (-GY) and Black (-E).

MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2
 Operating Temperature: From -40° C (without impact) to 60° C maximum continuous