



2U

Patented

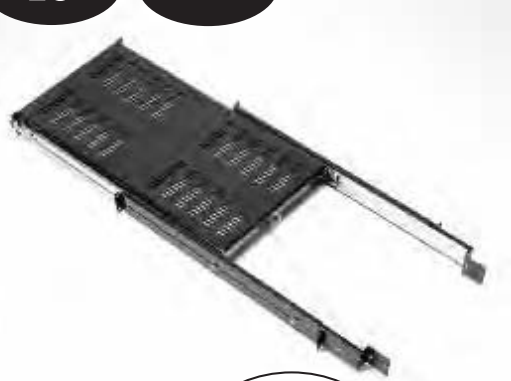

Flexible cable manager

## 32" Deep (810 mm) Sliding Shelf

Unlike most storage solutions that may cause kinking, twisting and cutting of cables during shelf extension and retraction, CPI's flexible polycarbonate belt, which fits in the rear undercarriage, solves these problems. This belt easily attaches to either the left or right side of the vertical bracket and contains eight molded releasable clips that accommodate cable bundles measuring up to 1" (25.4 mm) in diameter.

- Supports up to 160 lb (72.6 kg) using less than 2U
- Locks in the closed position
- Open easily with accessible front lock levers providing greater stability while accommodating deep servers
- Maximum usable shelf space of up to 32" (810 mm)
- Cable management belt provides greater flexibility in the storage of wire bundles
- Designed for 36" or 39"D (910 mm or 990 mm) cabinets

Part Number	Style	Shipping Weight lb (kg)
<b>19"W x 32"D (810 mm) Sliding Shelf</b>		
11913-X19	Vented	25 (11.3)
<b>19"W x 32"D (810 mm) Sliding Shelf</b>		
11914-X19	Non-Vented	25 (11.3)
<b>23"W x 32"D (810 mm) Sliding Shelf</b>		
11913-X23	Vented	25 (11.3)
<b>23"W x 32"D (810 mm) Sliding Shelf</b>		
11914-X23	Non-Vented	25 (11.3)

X=Color: 1=Gray, 2=White, 7=Black

2U

Patented



Patented shelf extends a full 24" (610 mm)

## Extra Heavy Duty Sliding Shelf

Shelf provides support up to 300 lb (136.1 kg) and uses only 2U, providing 26" (660 mm) usable depth.

- Flexible cable management belt eliminates kinking, bending or cutting of cable
- Adjustable mounting depth of 20" to 34" (510 mm to 860 mm)
- 19" shelf provides 17.5" (445 mm) usable width
- 23" shelf provides 21.5" (546 mm) usable width
- Locks in fully closed or open position

Part Number	Description	Shipping Weight lb (kg)
12700-X19	19"W Solid Shelf	29 (13.2)
12700-X23	23"W Solid Shelf	30 (13.6)

X=Color: 1=Gray, 2=White, 7=Black