


Suttle DSL Line Conditioners

625 Series, Flush Mount and Flush Mount Adapters, 6 Position


Product Reference: 625LCC1-xx, 625LCC1-2F-xx, 625LCC2-xx, 625LCC2-2F-xx



625LCC1-xx

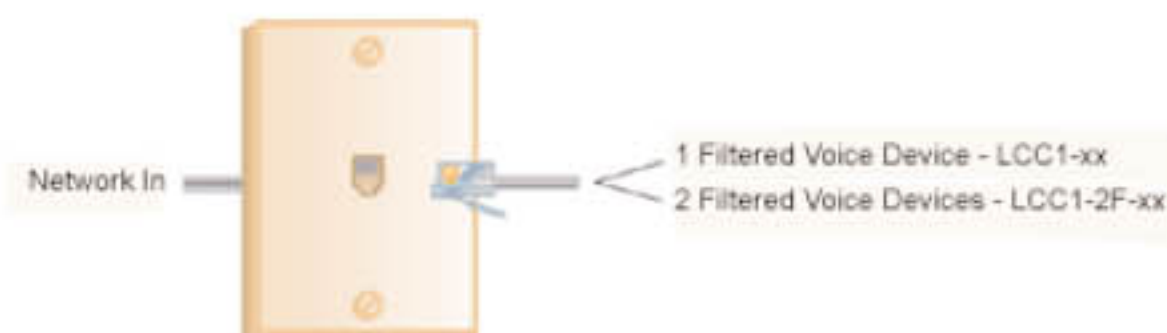

Flush Mount Filters

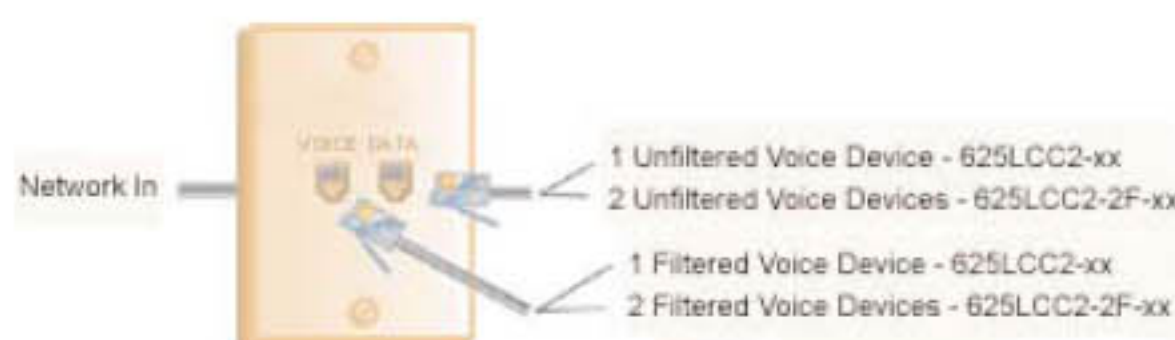

Flush Mount Adapters



625LCC2-xx

Product Description

Suttle's flush mount filters are wired directly to the home's internal wiring system providing one or two lines for voice device communications (e.g., phone, fax, answering machine, Call ID). The adapter style jacks provide both an unfiltered DSL jack for DSL connection and a filtered jack for one or two lines of voice device communications. These filters eliminate the need for inline or wall mount filtering devices providing a smooth, sleek design.

Features

- * Installs without mounting brackets
- * Meets ANSI T1E1.4 7R2 standards for DSL filter compliance
- * Smooth, sleek faceplate design matches electrical faceplates
- * Available in three colors

Product Specifications

- * Stop-band isolation is 21 dB from 25 kHz and 25 dB or greater from 50kHz to 12 Mhz
- * Filter Topology is 2-pole Low Pass
- * REN = 0.1 (B)
- * DC resistance through T & R to telephone port is 13 ohms maximum
- * Loading capability on telephone port is 16nf
- * Attenuation Distortion relative to 1 kHz 300Hz to 3400 Hz is less than 0.4 dB



Ordering Information

Part Number	Description
625LCC1-xx	1-Line filtered, screw terminal
625LCC1-2F-xx	2-Lines filtered, screw terminal
625LCC2-xx	1-Line filtered, auxiliary DSL jack, screw terminal
625LCC2-2F-xx	2-Lines filtered, auxiliary DSL jack, screw terminal

Colors:	(-52) Electrical Ivory, (-50) Ivory, (-85) White
Dimensions:	4.6" H x 2.8" W x 0.2" D
Packaging:	1 unit per bag/20 bags per carton



Specifications subject to change without notice. Copyright 2003. Original: 03/04