


# SC Fiber Optic Adapters

## specifications

SC fiber optic adapters with integrated panel retention clips are TIA/EIA-604 FOCIS-3 compliant. Each SC simplex adapter shall connect one SC connector pair in one module space. Each SC duplex adapter shall connect two SC connector pairs in two module spaces. SC adapters and adapter modules shall include phosphor bronze split sleeves for multimode applications or zirconia ceramic split sleeves for singlemode applications.



## technical information

<b>Standards requirements:</b>	TIA/EIA-604 FOCIS-3 compliant; exceeds TIA/EIA-568-B.3 requirements
<b>Split sleeve material:</b>	Phosphor bronze or zirconia ceramic (required for singlemode applications)
<b>Insertion loss:</b>	0.1dB average (multimode), 0.15dB average (singlemode); supports the performance of FOCIS-3 compliant connectors/patch cords
<b>Return loss:</b>	Supports singlemode (>40dB for SPC and >55dB for UPC) and multimode (>20dB) connector polish performance

\*Panduit LC Connector/Adapter connection

## key features and benefits

<b>Integrated panel retention clips:</b>	No metal clips to become bent, damaged or lost; clips automatically adjust for FOCIS-3 compliant panel thickness variations for improved mounting
<b>High glass transition temperature latch material (Tg&gt;100°C)</b>	Meets Telcordia GR-326-CORE, Issue 3; maintains latch integrity/geometry in high temperature environments for improved reliability
<b>Improved adapter protective cap design</b>	Maximum protection from contamination; protective cap fully surrounds split sleeve opening
<b>Short flange design</b>	Improved modularity and higher density usage
<b>Choice of phosphor bronze or zirconia ceramic split sleeves</b>	Provides an adapter split sleeve material option to fit specific network requirements
<b>Q.C. number and split sleeve material laser marked on every adapter</b>	Assures 100% traceability; quick and easy identification of split sleeve material: SC-P = Phosphor Bronze and SC-Z = Zirconia Ceramic
<b>Adapters available in Mini-Com<sup>®</sup> Modules</b>	System flexibility; adapter modules can be used in all Mini-Com <sup>®</sup> Closet Products and Work Area Outlets
<b>Adapters available in patch panels, fiber adapter panels (FAPs) and Opticom<sup>®</sup> QuickNet<sup>™</sup> Pre-Terminated MTP<sup>®</sup> Cassettes</b>	Provides a complete SC system solution
<b>Adapters and modules available in multiple colors</b>	Allows color-coding for network segregation

## applications

Panduit SC Fiber Optic Adapters can be used with Mini-Com<sup>®</sup> Modules, Patch Panels, Faceplates and Surface Mount Boxes for a complete SC system solution. SC adapters provide a robust solution for LANs, public networks, storage area networks

\*MTP is a registered trademark of US Conec Ltd.

and fiber-to-the-desk applications. SC adapters can also be mounted in high-density applications within Opticom<sup>®</sup> QuickNet<sup>™</sup> Pre-Terminated MTP<sup>®</sup> Cassettes and Fiber Enclosures, and Opticom<sup>®</sup> Fiber Adapter Panels (FAPs) and Enclosures.

### SC Fiber Optic Adapters

<b>Simplex MM:</b>	FASSCEI-L
<b>Duplex MM:</b>	FADSCEI-L
<b>Simplex 10Gig<sup>™</sup>:</b>	FASSCAQ-L
<b>Duplex 10Gig<sup>™</sup>:</b>	FADSCAQ-L
<b>Simplex 10Gig<sup>™</sup> (zirc.):</b>	FASSCZAQ-L
<b>Duplex 10Gig<sup>™</sup> (zirc.):</b>	FADSCZAQ-L
<b>Simplex SM (zirc.):</b>	FASSCZBU-L
<b>Duplex SM (zirc.):</b>	FADSCZBU-L
<b>Simplex APC (zirc.):</b>	FASSCZAG-L
<b>Duplex APC (zirc.):</b>	FADSCZAG-L

L = Bag of 50 adapters; 100 per carton.

### Mini-Com<sup>®</sup> SC Adapter Modules

<b>Simplex MM:</b>	CMSEISCEI
<b>Duplex MM:</b>	CMDEISCEI
<b>Simplex 10Gig<sup>™</sup>:</b>	CMSAQSCBL
<b>Duplex 10Gig<sup>™</sup>:</b>	CMDAQSCBL
<b>Simplex 10Gig<sup>™</sup> (zirc.):</b>	CMSAQSCZBL
<b>Duplex 10Gig<sup>™</sup> (zirc.):</b>	CMDAQSCZBL
<b>Simplex SM (zirc.):</b>	CMSBUSCZBU
<b>Duplex SM (zirc.):</b>	CMDBUSCZBU
<b>Simplex APC (zirc.):</b>	CMSAGSCZBL
<b>Duplex APC (zirc.):</b>	CMDAGSCZBL

### Opticom<sup>®</sup> SC Fiber Adapter Panels

<b>6 duplex MM:</b>	FAP6WEIDSC
<b>6 duplex 10Gig<sup>™</sup>:</b>	FAP6WAQDSCZ
<b>6 duplex SM (zirc.):</b>	FAP6WBUDSCZ
<b>12 simplex SM (zirc.):</b>	FAP12WBUSCZ

### OPTICOM<sup>®</sup> QuickNet<sup>™</sup> Pre-Terminated MTP<sup>®</sup> Cassettes

<b>12 SC to MTP<sup>®</sup> (12f):</b>	FC <sup>^</sup> -12-3S
<b>6 SC to MTP<sup>®</sup> (12f):</b>	FC <sup>^</sup> -12-3

### SC Simplex Fiber Optic Connectors

<b>MM (900µm/3mm, black):</b>	FSCMBL
<b>MM (900µm/3mm, red):</b>	FSCMRD
<b>SM (900µm/3mm, blue):</b>	FSCSBU
<b>MM (900µm/2mm, black):</b>	FSCM2.0BL
<b>MM (900µm/2mm, red):</b>	FSCM2.0RD
<b>SM (900µm/2mm, blue):</b>	FSCS2.0BU

### SC Duplex Fiber Optic Connectors

<b>Multimode (3mm only):</b>	FSCDM
------------------------------	-------

### Opti-Core<sup>®</sup> Fiber Optic Patch Cords

<b>Duplex SC to SC:</b>	F <sup>^</sup> D3-3M‡
<b>Simplex SC to SC:</b>	F <sup>^</sup> S3-3M‡
<b>Simplex SC to pigtail:</b>	F <sup>^</sup> B3-NM‡

### HD Connector Removal Tool

<b>For LC and SC:</b>	HDCRT
-----------------------	-------

\*\*Substitute for module color:

EI = Electric Ivory	BU = Blue
IG = International Gray	WH = White
TG = Technical Gray	BL = Black
AW = Arctic White	IW = Off White
EW = European White	

^Substitute for fiber type:

X (OM3/OM4 – 10Gig<sup>™</sup> 50/125µm),  
5 (OM2 – 50/125µm), 6 (OM1 – 62.5/125µm)  
or 9 (OS1 – 9/125µm).

‡Substitute for length in meters: 1, 2, 3, 5 or 10 for patch cords, and 1, 2 or 3 for pigtails; singlemode patch cords are also available in 12, 15, 25 or 30 meter lengths. Contact Customer Service for other available lengths.

# SC Fiber Optic Adapters


## selection information

Part Number	Adapter Type	Split Sleeve Material	Adapter Color	Module Color	Average Insertion Loss <sup>^</sup>	Return Loss <sup>^</sup>
<b>SC Adapters</b>						
<b>FASSCEI-L</b>	Multimode Simplex	Phosphor Bronze	Electric Ivory	N/A	0.1dB	>20dB
<b>FADSCEI-L</b>	Multimode Duplex	Phosphor Bronze	Electric Ivory	N/A		
<b>FASSCAQ-L</b>	10Gig™ Multimode Simplex	Phosphor Bronze	Aqua	N/A		
<b>FADSCAQ-L</b>	10Gig™ Multimode Duplex	Phosphor Bronze	Aqua	N/A		
<b>FASSCZAQ-L</b>	10Gig™ Multimode Simplex	Zirconia Ceramic	Aqua	N/A		
<b>FADSCZAQ-L</b>	10Gig™ Multimode Duplex	Zirconia Ceramic	Aqua	N/A		
<b>FASSCZBU-L</b>	Singlemode Simplex	Zirconia Ceramic	Blue	N/A	0.15dB	>40dB
<b>FADSCZBU-L</b>	Singlemode Duplex	Zirconia Ceramic	Blue	N/A		
<b>FASSCZAG-L</b>	APC Singlemode Simplex	Zirconia Ceramic	Green	N/A		
<b>FADSCZAG-L</b>	APC Singlemode Duplex	Zirconia Ceramic	Green	N/A		
<b>SC Adapter Modules</b>						
<b>CMSEISCEI</b>	Multimode Simplex	Phosphor Bronze	Electric Ivory	Various**	0.1dB	>20dB
<b>CMDEISCEI</b>	Multimode Duplex	Phosphor Bronze	Electric Ivory	Various**		
<b>CMSAQSCBL</b>	10Gig™ Multimode Simplex	Phosphor Bronze	Aqua	Black		
<b>CMDAQSCBL</b>	10Gig™ Multimode Duplex	Phosphor Bronze	Aqua	Black		
<b>CMSAQSCZBL</b>	10Gig™ Multimode Simplex	Zirconia Ceramic	Aqua	Black		
<b>CMDAQSCZBL</b>	10Gig™ Multimode Duplex	Zirconia Ceramic	Aqua	Black		
<b>CMSBUSCZBU</b>	Singlemode Simplex	Zirconia Ceramic	Blue	Various**	0.15dB	>40dB
<b>CMDBUSCZBU</b>	Singlemode Duplex	Zirconia Ceramic	Blue	Various**		
<b>CMSAGSCZBL</b>	APC Singlemode Simplex	Zirconia Ceramic	Green	Black		
<b>CMDAGSCZBL</b>	APC Singlemode Duplex	Zirconia Ceramic	Green	Black		


<sup>^</sup>Panduit SC Connector/Adapter connection

<sup>\*\*</sup>For other colors, replace suffix EI or BU with EI (Electric Ivory), BU (Blue), IG (International Gray), WH (White), TG (Technical Gray), BL (Black), AW (Arctic White), IW (Off White) or EW (European White).


### Mini-Com® SC Simplex Adapter Module




### Mini-Com® SC Duplex Adapter Module



### SC Simplex Adapter

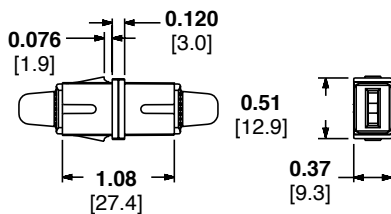

### SC Duplex Adapter

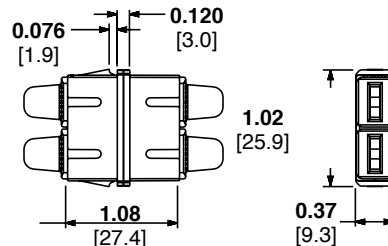

Dimensions are in inches [Dimensions in brackets are in millimeters]

### WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA  
Markham, Ontario  
cs-cdn@panduit.com  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
cs-emea@panduit.com  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
cs-ap@panduit.com  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
cs-japan@panduit.com  
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA  
Jalisco, Mexico  
cs-la@panduit.com  
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
cs-aus@panduit.com  
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)

For more information

Visit us at [www.panduit.com](http://www.panduit.com)

Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800-777-3300

©2016 Panduit Corp.  
ALL RIGHTS RESERVED.  
FBSP121--WW-ENG  
2016-06-22