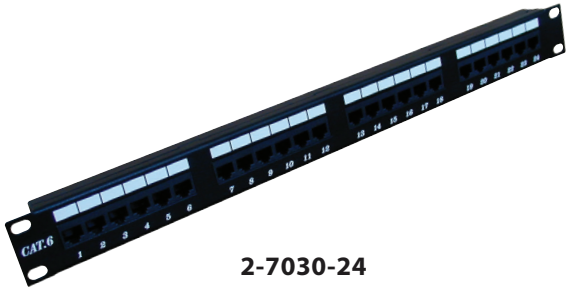

2-7030-24

Description

Rugged steel frame construction, with rolled edges eliminates flex during termination. Rear cable management bar provides cable strain relief. Write-on label and number designations provide easy identification. Labels provide port numbering and T568A/B color- coding for quick installation. Multiple cable tie locations facilitate cable dressing, moves, adds, and changes.

Features

- Available in 12, 24, and 48 port configurations
- Exceeds Category 5e TIA/EIA-568-B.2 specifications for component performance

Specifications

Wiring:	T568A or T568B
Insertion:	>750 cycles
Housing:	High impact, UL 94V-0 rated thermoplastic
IDC Blocks:	Tin lead plated connector accepts 22-26 AWG solid UTP cable
Contact Pressure:	>100 grams
Insulation Resistance:	500 megaohms
Contact Resistance:	<10 milliohms
Voltage/Current:	<140 VDC @ 1.5 amps
Dielectric Withstand:	>1000 VAC RMS @ 60Hz
Safety:	Complies with Part 68 of the FCC Rules and requirements adopted by the ACTA Complies with TIA/EIA Category 6 Specifications c UL us

Accessories

Cat5e Punchdown Tools

Part Number	Description
814B	Single Wire Punchdown Tool

Cat 5e Patch Cords

Part Number	Description
2-7403-xx	3-ft Patch Cord
2-7407-xx	7-ft Patch Cord
2-7410-xx	10-ft Patch Cord
2-7415-xx	15-ft Patch Cord

Colors (-xx): (-53) Red, (-56) Yellow, (-62)Blue

Product Information

Suttle Part Number	Description
2-7034-12	12-port, Cat 5e patch panel, 568A/B wiring, 3.25”H x 10”W x 2”D
2-7030-24	24-port, Cat 5e patch panel, 568A/B wiring, 1.75”H x 19”W x 3.5”D
2-7032-48	48-port, Cat 5e patch panel, 568A/B wiring, 3.5”H x 19”W x 3.5”D *Color: Gray Only*

Specifications subject to change without notice. Copyright 2014. 1960414

1001 East Highway 212 • Hector, MN USA 55342 • **suttlesolutions.com**
Toll Free: 1 (800) 852-8662 • Local: (320) 848-6711 • Fax: (320) 848-6218