


# HALL, ELEVATOR & EMERGENCY PHONES




GB523VN



GB524V47

GB524-L1-47

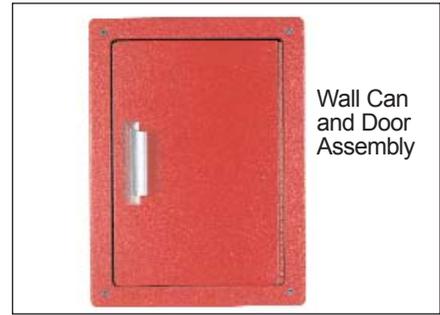

Wall Can and Door Assembly

GB524-L1-47

The GB523V and GB524V Telephones are e/w high stress armored cords and vandal resistant hardware. Each is available with any of four dial options. E/w amplified receiver and auto volume reset button. Baked on enamel finish may be ordered in either black or red.

GB523 models are designed to be mounted in existing outlet boxes that are at least 7W x 10H x 3D or with the optional GB62247 Outlet Box and GB62248 Trim Frame. GB524 models are designed to flush mount in an existing opening. They come complete with the outlet box, trim frame and a magnetic hinged door e/w a pull handle.

## ORDERING INFORMATION See page 5 for new Programmable Auto Dialer Telephone Sets.

### GB523VNXX

No dial, frame or can

### GB523VSXX

Automatic Tone Dial, 12-digit, line-powered, no frame or can

### GB523VXX

Pushbutton Pulse Dial, no frame or can

### GB523VXX

Tone Dial, no frame or can

### \*GB524VXX

Pulse Dial

### \*GB524VNXX

No Dial

### \*GB524VSXX

Line-powered, single line programmable SND

### \*GB524VXX

Tone Dial

### GB524-L1-XX


Wall Can/Door and Frame Assembly. Will accept GB523V and GB523V Series Tel Sets

Sold by:



**\*NOTE:** Furnished with GB524-L1 Wall Can/Door and frame assembly.

**COLOR OPTIONS:** XX Denotes color. Insert color code digits to order: 00 Black or 47 Cherry Red

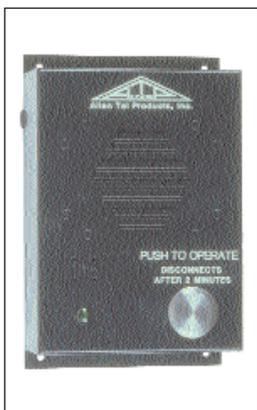

GB31454

The GB31454 and GB31454-SND measure 7H x 4.5W x 2.5D. They are pushbutton operated, the line being connected when the pushbutton is momentarily pressed. They also have a 2-minute Time-Out feature which disconnects the call after 2 minutes. An LED is provided to indicate an Off Hook condition. The GB31454 is for Auto Ring Down or Dedicated lines, and the GB31454-SND is e/w a programmable, single number autodialer. The GB31560 measures 9.7H x 4.5W x 2.5D. It is the same as the GB31454 except that it has a tone dial. The GB31454, GB31454-SND and GB31560 Mini-Elevator Speakerphones are designed for indoor applications with limited space, such as elevators, parking ramps, campuses and door entry. They can be surface mounted or flush mounted in existing wall cans. They are powered by the telephone line with no batteries or AC power required. They are finished in black textured baked-on enamel.



GB31560

## ORDERING INFORMATION

### GB31454

Mini-Elevator/Hall Speakerphone less Dial, e/w Ringer and 2-minute Automatic Disconnect for ARD circuits.

### GB31560

Same as GB31454 except e/w DTMF Tone Dial.

### GB31454-SND

Mini-Elevator/Hall Speakerphone e/w 12-digit programmable Auto-dialer, Ringer and a 2-minute Automatic Disconnect.