

SST-Optimizer™ Cables

2-72 Fibers

An Evolant™ Solutions Product

Corning
Cable Systems

Description


SST-Optimizer™ Cables make optimal use of available duct space by providing high-fiber-packing density in small cables that can be readily installed in micro-duct systems using a variety of cable-installation techniques. The cables consist of bundles of color-coded fibers in a central-tube design.

Features / Benefits


- Small outer diameter enables installation of up to 72 fibers in 10 mm OD/8 mm ID duct systems
- Single-tube design with dielectric yarns has no preferential bend
- Unique woven binder provides:
 - Easier fiber bundle segregation
 - Simplified fiber handling
- Craft-friendly cable construction facilitates:
 - Drop of any number of fibers at any access point
 - Access of any individual fiber in future midspan access
- Compatible with industry-standard hardware and procedures



SST-Optimizer Cable | Photo CLT52

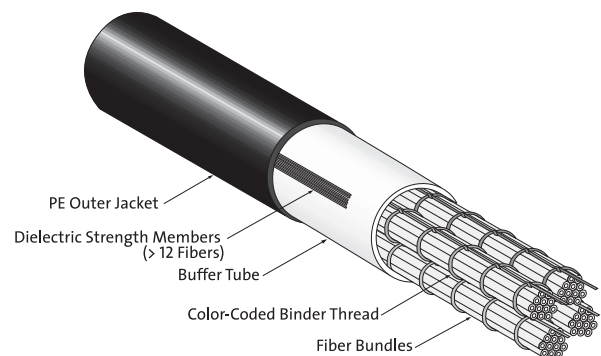

SST-Optimizer Cable | Drawing ZA-2585

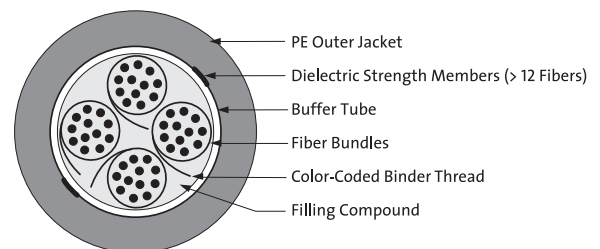

SST-Optimizer Cable | Drawing ZA-2585



SST-Optimizer™ Cables

2-72 Fibers

An Evolant™ Solutions Product

Corning
Cable Systems

Specifications

Storage Temperature	-40° to +70°C (-40° to +158°F)					
Installation Temperature	-30° to +50°C (-22° to +122°F)					
Operating Temperature	-40° to +70°C (-40° to +158°F) ¹					
Fiber Count	Buffer Tube Outer Diameter mm (in)	Nominal Weight kg/km (lb/1000 ft)	Nominal Diameter² mm (in)	Minimum Bend Radius		Representative Corning Cable Systems Part Number³
				Loaded cm (in)	Installed cm (in)	
2-12	2.2 (0.9)	10 (6.7)	3.5 (0.14)	5.3 (2.1)	3.5 (1.4)	012RB4-13301C20
12-72	4.7 (0.19)	30 (20)	6.0 (0.24)	9.0 (3.5)	6.0 (2.4)	072RB4-13201C20

Notes:

¹Standard single-mode fiber performance.

²Actual diameter may vary by ± 5%.

³Part numbers are representative. Please contact Corning Cable Systems Customer Service to verify a specific design's part number when ordering.

Maximum Tensile Loads

Fiber Count	Nominal Outer Diameter mm (in)	Short-Term N (lbf)	Long-Term N (lbf)
2-12	3.5 (0.14)	100 (22)	33 (7)
12-72	6.0 (0.24)	500 (110)	165 (35)

SST-Optimizer™ Cables

2-72 Fibers

An Evolant™ Solutions Product

Corning
Cable Systems

Transmission Performance Table

Fiber Code	K	C	E	E
Performance Option Code	30	31	01	00
Fiber Type	62.5/125 μm (850/1300 nm)	50/125 μm (850/1300 nm)	Single-mode (1310/1383/1550 nm)	Single-mode (1310/1383/1550 nm)
Maximum Attenuation (dB/km)	3.5/1.0	3.5/1.5	0.4/0.4/0.3	0.35/0.35/0.25
Minimum LED Bandwidth (MHz•km)	200/500	500/500	- / - / -	- / - / -
Minimum Effective Modal Bandwidth (MHz•km)	220/ -*	510/ -*	- / - / -	- / - / -
Serial Gigabit Ethernet Distance (m)	300/550	600/600	5000/ - / -	5000/ - / -
Serial 10 Gigabit Ethernet Distance (m)	33/ -	82/ -	10000/40000	10000/40000

* EMB when deployed with 850 nm, 1 Gb/s VCSELs as predicted by RML Bandwidth using FOTP-204.

Ordering Information

Contact Corning Cable Systems Customer Service for other options.

□ □ □ □ B 4 - 1 3 □ □ □ C 2 0
 1 2 3 4 5 6 7 8 9 10 11 12 13 14

1 - 3 Select fiber count (012 to 072).

4 Select fiber code (see Transmission Performance Table).

5 / 12 Defines cable type.

B/C = SST-Optimizer™ Cable

6 Defines jacket.

4 = Dielectric

7 Defines fiber placement.

1 = 12 fiber/bundle (standard)

8 Defines length markings.

3 = Markings in meters

9 Select tensile strength.

2 = 500 N/110 lb (12-72 fiber) standard

3 = 100 N/22 lb (2-12 fiber)

10 - 11 Select performance option code.
(see Transmission Performance Table).

13 - 14 Defines special requirements.

20 = No special requirements



SST-Optimizer™ Cables

2-72 Fibers

An Evolant™ Solutions Product

Corning
Cable Systems



Corning Cable Systems LLC • PO Box 489 • Hickory, NC 28603-0489 USA

1-800-743-2675 • FAX: +1-828-901-5973 • International: +1-828-901-5000 • <http://www.corning.com/cablesystems>

Corning Cable Systems reserves the right to improve, enhance and modify the features and specifications of Corning Cable Systems' products without prior notification. Evolant and SST-Optimizer are trademarks of Corning Cable Systems Brands, Inc. Discovering Beyond Imagination is a trademark of Corning Incorporated. All other trademarks are the properties of their respective owners. Corning Cable Systems is ISO 9001 certified. © 2003, 2004 Corning Cable Systems. All rights reserved. Published in the USA. EVO-188-EN / April 2004 / pdf

