

# AN-130 Speaker Monitor

Portable Speaker Monitor Specifications

## Advancing Technology

The Anchor Audio AN-130 speaker monitor is a light-weight, easy to use system that fills the room with your voice, with the wireless microphone you're free to move around the room. The AN-130 is ideal for use with a video projector, PC or CD/DVD player. Who uses the AN-130? Teachers, corporate presenters, anyone that needs to reach groups of one to one hundred.



## AN-130 FEATURES

### 6-YEAR WARRANTY!

REACH CROWDS OF 100+

101 DB OF CLEAR SOUND

16 CHANNEL UHF DIVERSITY WIRELESS  
BY ANCHOR AUDIO

BASS & TREBLE CONTROLS

30 WATT AMPLIFIER EQUALS LOTS OF SOUND

CARBON FIBER CONE

MAGNETICALLY SHIELDED SPEAKER FOR AV USE

INPUT JACKS: RCA LINE-IN, 1/4" LINE-IN  
& 1/4" MIC-IN

1/4" LINE-OUT JACK - DAISY CHAIN MULTIPLE  
SYSTEMS OR RECORD OUTPUT

REMOTE CONTROL FOR VOLUME & MUTE

DURABLE INJECTION-MOLDED  
POLYPROPYLENE CASE

WEIGHS JUST 8.5 POUNDS

### MADE IN THE USA!

## AN-130 ACCESSORIES

**REMOTE-130** Infrared remote control

**MIC-90P** Professional dynamic, cardioid pattern handheld microphone

**CC-100** Speaker/accessory bag

**CC-100XL** Speaker/accessory bag - large

**HC-1550** Custom traveling hard case

**SS-250** Speaker stand

**MSB-201** Mic stand w/ boom

**SB-1** Stand mount

**SB-3** Ceiling mount bracket\*

**SB-360** 360° swivel wall bracket\*

\* Available w/ black or white finish

## UHF WIRELESS

**WH-6000** Wireless Handheld mic/transmitter

**WB-6000** Wireless body-pack transmitter w/ handsfree microphone. Mic options include: Over-the-Ear/EM-60T, Lapel/LM-60, Collar/CM-60, Headband/HBM-60

## AN-130 MODELS

**AN-130** Speaker monitor / white


**AN-130BK** Speaker monitor / black

**AN-130U1** 1 built-in wireless receiver / white

**AN-130UBK** 1 built-in wireless receiver / black

**AN-130RC** Remote control / white

**AN-130RCBK** Remote control / black

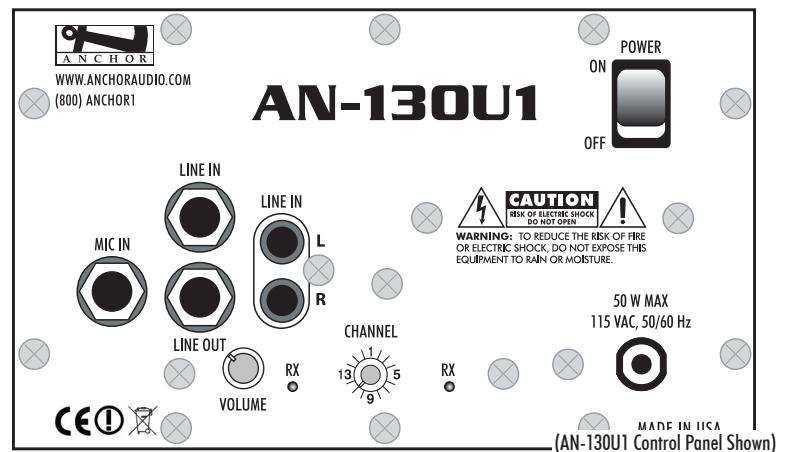

## AN-130 TECHNICAL SPECIFICATIONS

Rated Power Output	30 watts
Max SPL @ Rated Power	101 dB @ 1 meter
Frequency Response	65 Hz – 18 kHz ± 3 dB
Speaker Type	4.5" woofer, 10 mm dome tweeter
AC Power Reqs.	110 – 125 VAC, 50/60 Hz
Export Model	208 – 240 VAC, 50/60 Hz (50W max)
Fuse Rating	T 1.0A / 250V
Export Model	T 0.5A / 250V (internally mounted)
Dimensions (HWD)	5.25 x 8.4 x 9" / 13 x 21 x 23 cm
Weight	8.5 lbs / 3.8 Kg

<b>Inputs</b>	
Line (2)	Hi-Z, unbalanced, RCA (summing L+R)
Microphone	Lo-Z, unbalanced, 1/4" phone
<b>Output</b>	
Line	Lo-Z, buffered, 1/4" phone
<b>Sensitivity For Rated Output</b>	
Line	-20 dBV (100 mVrms)
Microphone	-43 dBV (7.5 mVrms)



(FEATURES & SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE)



**Anchor Audio, Inc.**

Portable Sound Systems • Torrance, California

**888/444-6077**

www.anchoraudio.com

S-AN/1206