


SEISMIC FRAME® TWO-POST RACK

Patented  us

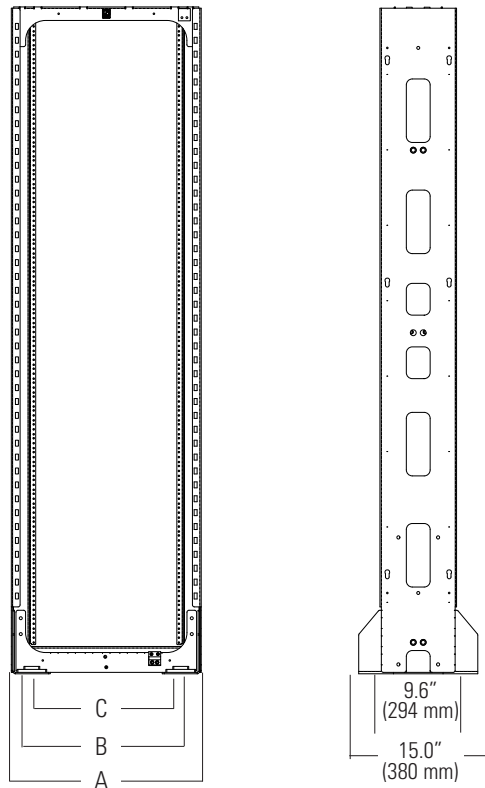

Seismic Frame Two-Post Rack

Open, two-post, seismic rack supports 19" EIA or 23" wide rack-mount equipment.

| Part Number | Description H x W ft (m) | Shipping Weight lb (kg) |
|-------------|--|----------------------------|
| 13853-X03 | 7 (2.1) x 19", 44U Tapped #12-24 Zinc Rails | 180 (81.6) |
| 13854-X03 | 7 (2.1) x 19", 44U Square-Punched Zinc Rails | 178 (80.7) |
| 13855-X03 | 7 (2.1) x 19", 44U Tapped #12-24 Painted Rails | 180 (81.6) |
| 13856-X03 | 7 (2.1) x 19", 44U Square-Punched Painted Rails | 178 (80.7) |
| 13883-X03 | 7 (2.1) x 23", 44U Tapped #12-24 Zinc Rails | 185 (83.9) |
| 13884-X03 | 7 (2.1) x 23", 44U Square-Punched Zinc Rails | 183 (83.0) |
| 13885-X03 | 7 (2.1) x 23", 44U Tapped #12-24 Painted Rails | 185 (83.9) |
| 13886-X03 | 7 (2.1) x 23", 44U Square-Punched Painted Rails | 183 (83.0) |

| Description | 19 in (mm) | 23 in (mm) |
|--------------------|-------------|-------------|
| Overall Width (A) | 24.0 (610) | 28.0 (710) |
| Frame Opening (B) | 19.3 (490) | 23.3 (592) |
| Rail Clearance (C) | 17.75 (450) | 21.75 (552) |

X=Color; 1=Gray, 2=White, 7=Black. Install using (4) seismic-rated concrete anchors (sold separately).

7U



Cable Management Fingers Kit

Organize patch cords and jumper cables by rack-mount unit.

- 7U T-shaped plastic cable guides snap onto the front and rear of the rack frame
- Openings between the T-shaped guides align with each rack-mount unit on the rack
- Single-Sided Kit includes 12 cable guides for one side (front or rear) of the rack
- Double-Sided Kit includes 24 cable guides for both sides (front and rear) of the rack

| Part Number | Description | Shipping Weight lb (kg) |
|-------------|---|----------------------------|
| 13696-001 | Cable Management Fingers Kit, Single-Sided | 7 (3.2) |
| 13696-002 | Cable Management Fingers Kit, Double-Sided | 14 (6.4) |

Color is Black.