

ALTOS® Figure-8 Gel-Free Cables, Enhanced


An Evolant® Solutions Product

features and benefits |


Figure-8 cable design	Easy, one-step installation
Fully waterblocked loose tube, gel-free design	Simple access and no clean up
Medium density polyethylene jacket	Rugged, durable and easy to strip
Available in 62.5 µm, 50 µm, single-mode and hybrid versions	Ready for any application including Gigabit and 10 Gigabit Ethernet

Corning Cable Systems ALTOS® Figure-8 Gel-Free Cables are self-supporting aerial cables designed for easy and economical one-step installation. The loose tube design provides stable performance over a wide temperature range and is compatible with any telecommunications-grade optical fiber. The gel-free design is fully waterblocked using craft-friendly water-swappable materials, making cable access simple and requiring no clean up.

While the flexible, craft-friendly buffer tubes are easy to route in closures, the SZ-stranded, loose tube design isolates optical fibers from installation and environmental rigors and facilitates midspan access. The figure-8 cable design allows easy, one-step installation, using standard hardware and installation methods. These cables have a medium density polyethylene jacket that is rugged, durable and easy to strip.

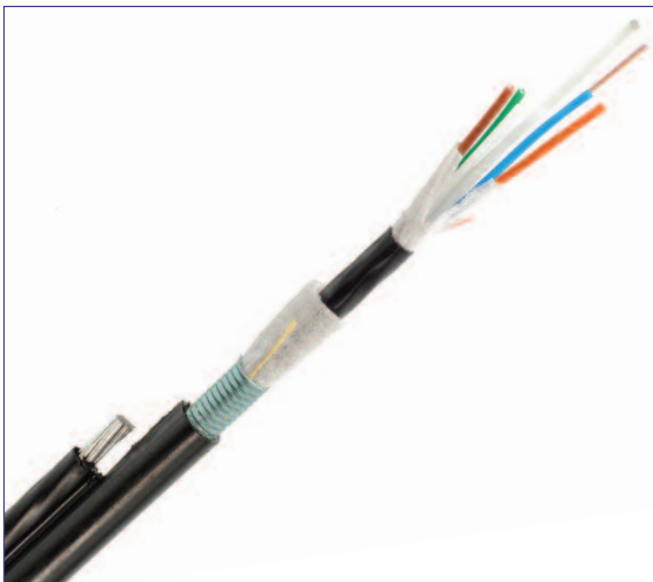

ALTOS® Figure-8 Gel-Free Cable | Photo LAN1275


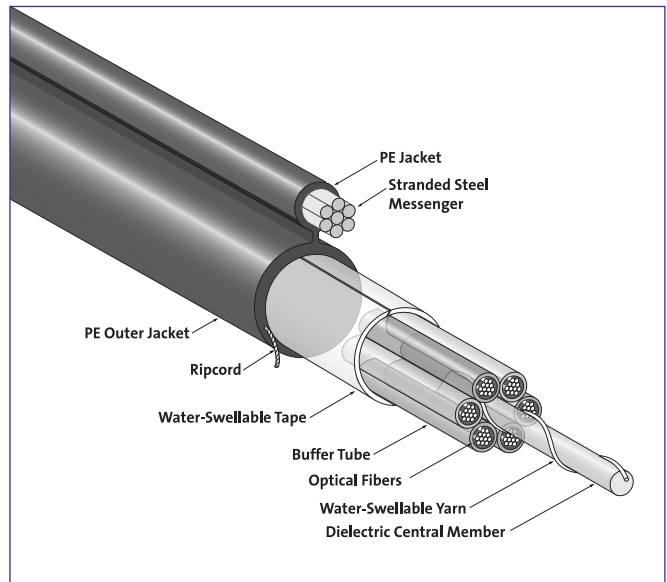


ALTOS Figure-8 Cable | Drawing ZA-3129



ALTOS® Figure-8 Gel-Free Cables, Enhanced

An Evolant®
Solutions Product

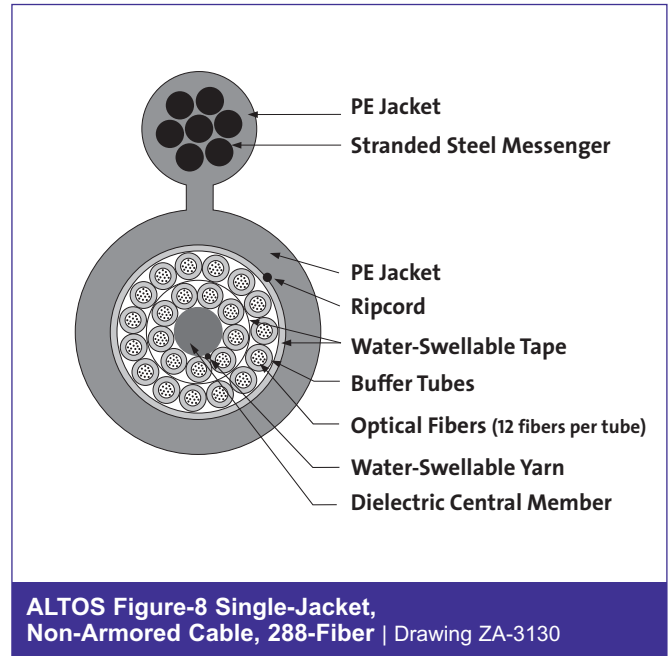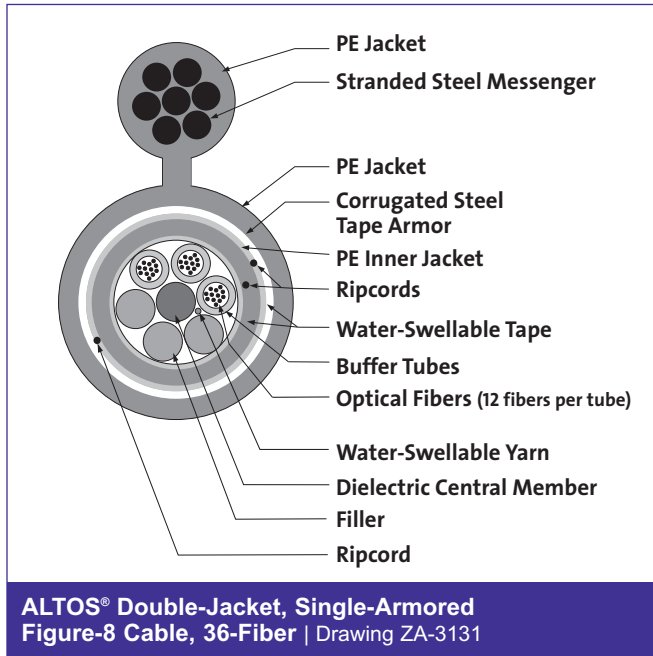

specifications |

Maximum Tensile Loads	Short-Term:	See sag and tension information
	Long-Term:	See sag and tension information

Temperatures	Storage:	-40° to +70°C (-40° to +158°F)
	Installation:	-30° to +70°C (-22° to +158°F)
	Operation:	-40° to +70°C (-40° to +158°F)

Approvals and Listings	RDUP 7 CFR 1755.900
-------------------------------	---------------------

Common Installations	Outdoor self-supporting aerial
-----------------------------	--------------------------------

Design and Test Criteria	ANSI/ICEA S-87-640
---------------------------------	--------------------

ALTOS® Figure-8 Gel-Free Cables, Enhanced

An Evolant®
Solutions Product

specifications | (continued)

Fiber Count	Maximum Fibers per Tube	Number of Tube Positions	Number of Active Tubes	Central Member	Nominal Cable Weight kg/km (lb/1000 ft)	Nominal Outer Diameter mm (in)	Nominal Cable Height mm (in)	Minimum Bend Radius Loaded cm (in) Installed cm (in)	
Figure-8 (Non-Armored)									
2-72	12	6	1-6	Dielectric	297 (199)	10.5 (0.41)	22.1 (0.87)	15.8 (6.2)	10.5 (4.1)
73-96	12	8	7-8	Dielectric	321 (215)	12.2 (0.48)	23.8 (0.94)	18.3 (7.2)	12.2 (4.8)
97-144	12	12	9-12	Dielectric	386 (259)	15.8 (0.62)	27.4 (1.08)	23.7 (9.3)	15.8 (6.2)
145-216	12	18	13-18	Dielectric	371 (249)	16.0 (0.63)	27.6 (1.09)	24.0 (9.4)	16.0 (6.3)
217-288	12	24	19-24	Dielectric	420 (282)	18.2 (0.72)	29.8 (1.17)	27.3 (10.7)	18.2 (7.2)
Figure-8 (Armored)									
2-72	12	6	1-6	Dielectric	396 (266)	14.3 (0.56)	25.9 (1.02)	21.5 (8.4)	14.3 (5.6)
73-96	12	8	7-8	Dielectric	432 (290)	16.0 (0.63)	27.6 (1.09)	24.0 (9.4)	16.0 (6.3)
97-144	12	12	9-12	Dielectric	527 (353)	19.7 (0.78)	31.3 (1.23)	29.6 (11.6)	19.7 (7.8)
145-216	12	18	13-18	Dielectric	513 (344)	19.9 (0.78)	31.5 (1.24)	29.9 (11.8)	19.9 (7.8)

Maximum Span with 1% Installation Sag			
Number of Tube Positions	NESC Light m (ft)	NESC Medium m (ft)	NESC Heavy m (ft)
Figure-8 (Non-Armored)			
6	241 (790)	235 (770)	168 (550)
8	241 (790)	229 (750)	158 (520)
12	216 (710)	201 (660)	140 (460)
18	207 (680)	198 (650)	137 (450)
24	183 (600)	183 (600)	137 (450)
Figure-8 (Armored)			
6	189 (620)	189 (620)	140 (460)
8	189 (620)	186 (610)	131 (430)
10	171 (560)	162 (530)	116 (380)
18	162 (530)	158 (520)	116 (380)

ALTOS® Figure-8 Gel-Free Cables, Enhanced

An Evolant®
Solutions Product

transmission performance |

Fiber Code	K	C	E	E
Performance Option Code	30	31	01	00
Optical Fiber Type (µm)	62.5 Multimode	50 Multimode	Single-mode*	Single-mode*
ISO/IEC 11801 Nomenclature	OM1	OM2	OS2	OS2
Wavelength (nm)	850/1300	850/1300	1310/1383/1550	1310/1383/1550
Maximum Attenuation (dB/km)	3.4/1.0	3.0/1.0	0.4/0.4/0.3	0.35/0.35/0.25
Minimum Over Filled Launch (OFL) Bandwidth (MHz•km)	200/500	700/500	- / - / -	- / - / -
Minimum Effective Modal Bandwidth (EMB) (MHz•km)	220/ -	950/ -	- / - / -	- / - / -
Serial 1 Gigabit Ethernet Distance (m)	300/550	750/600	5000 / - / -	5000 / - / -
Serial 10 Gigabit Ethernet Distance (m)	33/ -	150/ -	10000/ - /40000	10000/ - /40000

* ITU 652.D compliant.

Notes:

- 1) Improved attenuation and bandwidth options available.
- 2) Contact Corning Cable Systems Customer Service Representative for additional information.

ALTOS® Figure-8 Gel-Free Cables, Enhanced

An Evolant®
Solutions Product

ordering information |

<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	U	<input type="checkbox"/>	-	T	4	1	<input type="checkbox"/>	<input type="checkbox"/>	D	2	0
1	2	3	4	5	6		7	8	9	10	11	12	13	14

|1-3

Select fiber count.

Standard offerings:

012	060	192
024	072	216
036	096	288
048	144	

See Note 1.

|4

Select fiber code
(see Transmission
Performance table).

|5 / 12

Defines cable type.
U / D = ALTOS® Gel-Free
Cable

|6

Select outer jacket.

A = Non-armored
B = Armored

See Note 2.

|7

Defines fiber placement.
T = 12 fibers per tube

|8

Defines length markings.
4 = Markings in feet
(standard)

|9

Defines tensile strength
(see Specifications).

|10-11

Select performance
option code (see
Transmission
Performance table).

|13-14

Defines special
requirements.
20 = No special
requirements

Notes:

1) 288 fibers available in
non-armored version only.

2) Use with buffer tube
fan-out kit for direct
termination applications.

