



## iSTATION™ System Front-Loading Footprint.

High Definition Video.

1080p Signal Transmission.

High Quality Gold Connection.

### SPECIFICATIONS

- ◆ **Connector:**  
HDMI - Female to female 3" tail;  
HDMI - Female to female coupler.  
Gold-plated 2μ".  
Version 1.3.
- ◆ **Audio Signal:**  
PCM, DVD-Audio, Super Audio CD, Dolby True HD, DTS-HD Master Audio.
- ◆ **Video Signal:**  
480i, 480p, 576i, 576p, 720p, 1080i, 1080p.
- ◆ **Pins:** 19.

### CABLE TERMINATION

**Cable Type:** Standard HDMI cable assemblies.

Note: Can not be field terminated.

#### Standard HDMI Distance Limitation:

- 28 AWG Cable Assemblies 5 meters.
- 24 AWG Cable Assemblies 12 meters.
- Always check cable/device manufacturer's specifications.

#### Hubbell Distance Limitations:

- Maximum of 36 feet device to device (Non-Active Hubbell Cable Assemblies).

### CONNECTOR TERM

**HDMI:** High-Definition Multimedia Interface is a digital audio/video connector interface for transmitting uncompressed digital streams. HDMI connects through digital rights management (DRM) from the source to the device.

## HUBBELL iStation Audio/Video Connectors, HDMI A-Couplers

Female 6-wire to  
Female 6-Wire.

Female-to-female  
3" tail.



True HD Video.

HDMI locking termination.

Hubbell's HDMI couplers provides an easy way to run High Definition Audio/Video from device to device. The high performance, high quality video connection is designed for minimal signal loss delivering true high definition 1080p video to the viewing device.

Hubbell's HDMI 3" tail provides flexibility and ease-of-use for installations that have depth and capacity issues. Hubbell's HDMI couplers fit into a high-density 1 unit iSTATION™ module allowing for 2 additional units to be placed into a single gang faceplate for additional applications.

Create a customized multimedia work station outlet by adding a high-density HDMI coupler along with Hubbell's extensive line of AV connectors, iSTATION™ modules and XCELERATOR™ jacks.

### APPLICATIONS SUPPORTED

- |                                |                                 |
|--------------------------------|---------------------------------|
| ▲ Projectors.                  | ▲ Camcorders.                   |
| ▲ Flat panel monitors.         | ▲ Desktop and laptop computers. |
| ▲ Smart whiteboard technology. | ▲ Multimedia devices.           |
| ▲ Game consoles.               | ▲ Audio/Video receivers.        |
| ▲ DVR, DVD, HD DVD, Blu-Ray.   |                                 |

### INSTALLATION TIPS

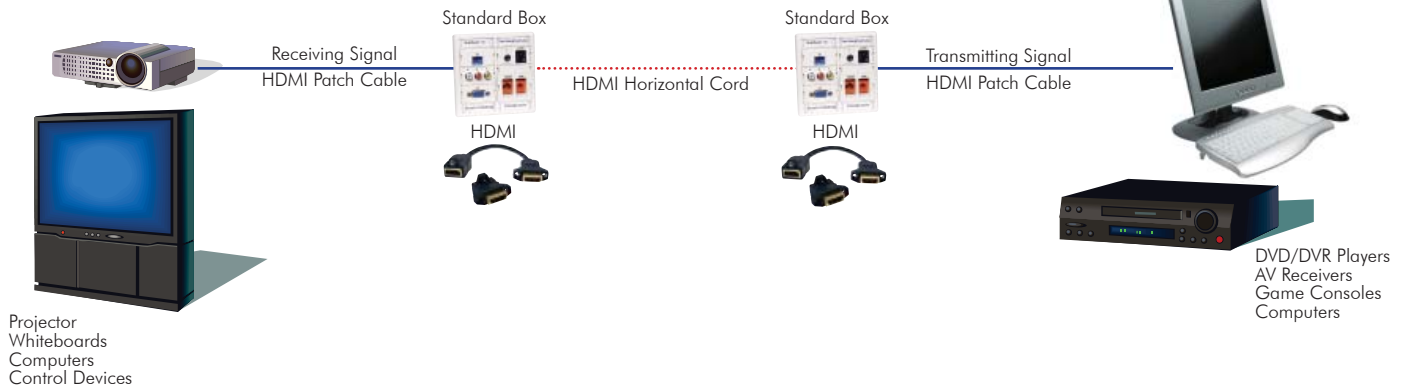
**Important:** Always allow for clearance behind connection location to ensure for proper bend radius with HDMI cable assemblies.

**Gold Plating:** Gold plating encapsulates the connectors base metal (brass) preventing allowing oxidation/corrosion to form. It also has a more transparent (signal) conductive path over nickel (3x), which is closer to the copper its transmitting over.

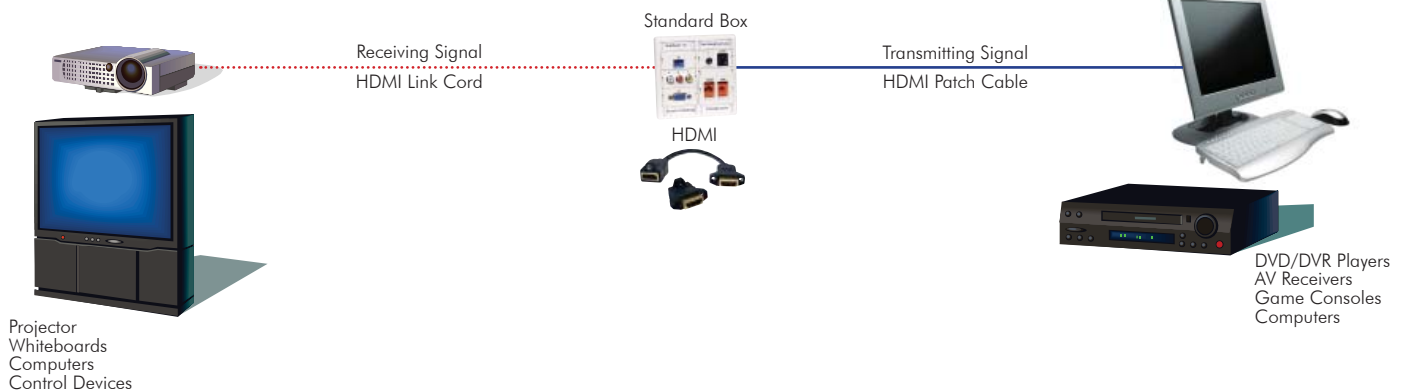
## TYPICAL APPLICATIONS

**Application 1 - Plate-to-Plate (Coupler to Coupler)**

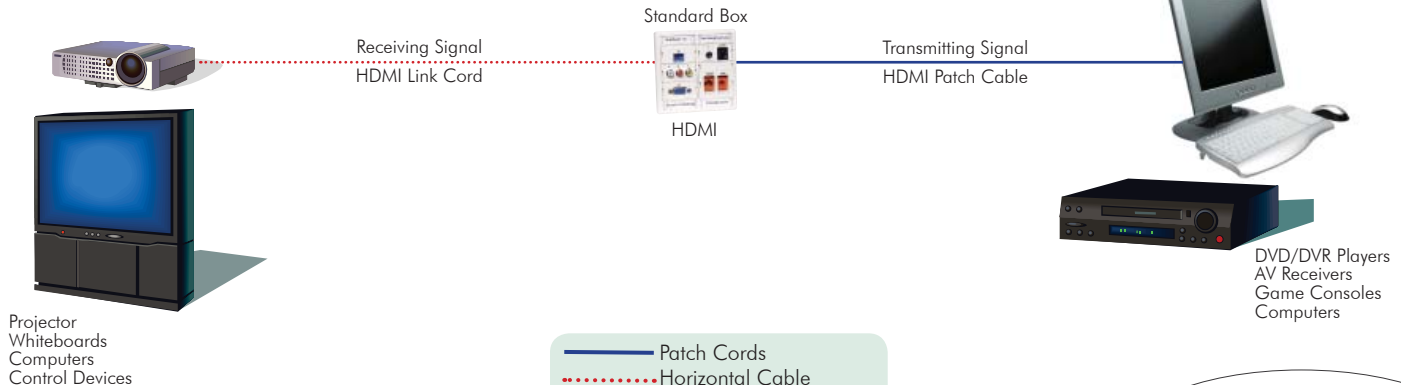
- HDMI(1/10) - 3" Tail Coupler can be used when cable depth constraints are encountered.
  - HDMI(1/10) - Coupler can be used when cable depth constraints are not an issue
  - HDHxxBK – HDMI locking horizontal cord (male screw plug to male screw plug) locks connections in place, not allowing a plug to coupler disconnect.
- Note: Maximum Hubbell non-active channel distance is 36 feet from device-to-device.*

**Application 2 - Plate-to-Device (Coupler to Device)**

- HDMI(1/10) - 3" Tail Coupler can be used when cable depth constraints are encountered
  - HDMI(1/10) - Coupler can be used when cable depth constraints are not an issue
  - HDLxxBK – HDMI locking Link Cord (male screw plug to male plug) locks connection in place in the plate and plugs directly into the device
- Note: Maximum Hubbell non-active channel distance is 36 feet from device-to-device.*

**Application 3 - Plate-to-Device (Coupler Link Cord)**

- HDCxxBK - Coupler Link cord can be used when cable depth constraints are encountered – Coupler Link Cord (female coupler to male plug) mounts directly into the module/plate/frame and plugs directly into the device, eliminating an extra connection in the channel.
- Note: Maximum Hubbell non-active channel distance is 36 feet from device-to-device.*

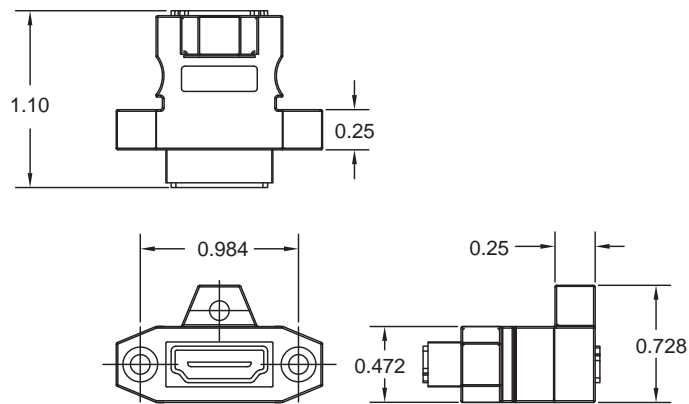
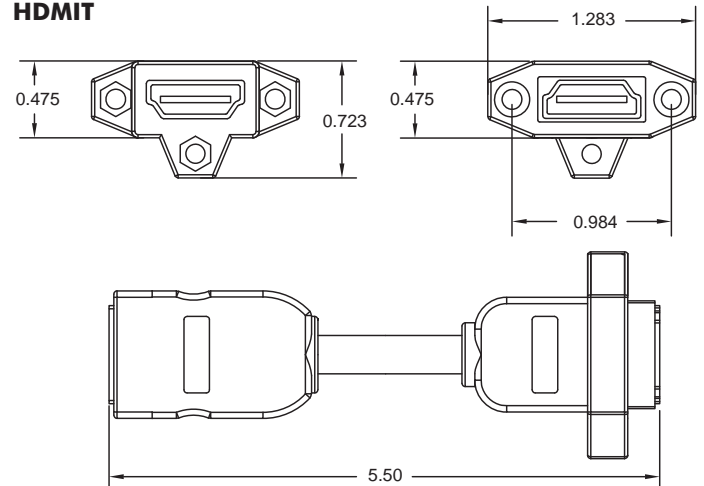
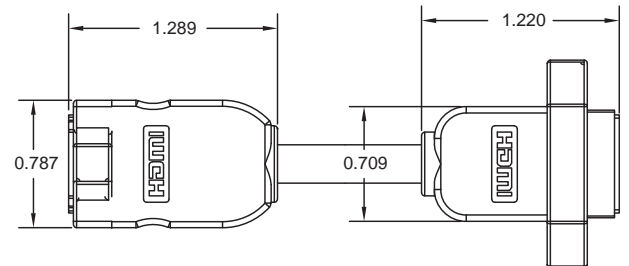


— Patch Cords  
- - - Horizontal Cable

HDMI AV Connector  
in Hubbell iSTATION™  
face plate.

Sold by:

**TWAcomm.com**  
http://www.TWAcomm.com  
Toll Free: (877) 389-0000

**DIMENSIONS****HDMIC****HDMIT****CONNECTOR DEPTH CHART**

Sold by:

**HDMI CONNECTOR STANDARDS**

HDMI Version & Capabilities	1	1.1	1.2/1.2	1.3/1.3a/1.3b
Maximum signal bandwidth (MHz)	165	165	165	340
Maximum TMDS bandwidth (Gbit/s)	4.95	4.95	4.95	10.2
Maximum video bandwidth (Gbit/s)	3.96	3.96	3.96	8.16
Maximum audio bandwidth (Mbit/s)	36.86	36.86	36.86	36.86
Resolutions @ 24bits per pixel	1920x1080p 60Hz	1920x1080p 60Hz	1920x1080p 60Hz	2560x1600p 60Hz
RGB	Yes	Yes	Yes	Yes
YCbCr	Yes	Yes	Yes	Yes
xvYCC	No	No	No	Yes
Deep Color	No	No	No	Yes
Maximum Color Depth (bits per pixel)	24	24	24	48*
Auto lip-sync	No	No	No	Yes
8channel/192 kHz/24-bit audio	Yes	Yes	Yes	Yes
Dolby TrueHD bit stream	No	No	No	Yes
DTS-HD Master Audio bit stream	No	No	No	Yes
Blu-Ray/HD DVD @ full resolution	Yes	Yes	Yes	Yes

## AV Connectors, HDMI



Description	Catalog No.
HDMI Coupler, Gold, Female to Female, 1-pk	<b>HDMIC1</b>
HDMI Coupler, Gold, Female to Female, 10-pk	<b>HDMIC10</b>
HDMI 3" Tail, Gold, Female to Female, 1-pk	<b>HDMIT1</b>
HDMI 3" Tail, Gold, Female to Female, 10-pk	<b>HDMIT10</b>

## HDMI Horizontal Cords



Description	Catalog No.
HDMI Patch Cord, 24AWG, 3'	<b>HDPC03BK</b>
HDMI Patch Cord, 24AWG, 6'	<b>HDPC06BK</b>

## HDMI Horizontal Cords (Connector to Connector)

HDMI Horizontal Cord, 24AWG, 10'	<b>HDH10BK</b>
HDMI Horizontal Cord, 24AWG, 15'	<b>HDH15BK</b>
HDMI Horizontal Cord, 24AWG, 20'	<b>HDH20BK</b>
HDMI Horizontal Cord, 24AWG, 15'	<b>HDH25BK</b>
HDMI Horizontal Cord, 24AWG, 30'	<b>HDH30BK</b>

## HDMI Link Cords (Connector to Device)

HDMI Link Cord, 24AWG, 10'	<b>HDL10BK</b>
HDMI Link Cord, 24AWG, 15'	<b>HDL15BK</b>
HDMI Link Cord, 24AWG, 20'	<b>HDL20BK</b>
HDMI Link Cord, 24AWG, 15'	<b>HDL25BK</b>
HDMI Link Cord, 24AWG, 30'	<b>HDL30BK</b>

## HDMI Coupler Cords (Coupler to Device)

HDMI Coupler Cord, 24AWG, 10'	<b>HDC10BK</b>
HDMI Coupler Cord, 24AWG, 15'	<b>HDC15BK</b>
HDMI Coupler Cord, 24AWG, 20'	<b>HDC20BK</b>
HDMI Coupler Cord, 24AWG, 15'	<b>HDC25BK</b>
HDMI Coupler Cord, 24AWG, 30'	<b>HDC30BK</b>

Note: Maximum Hubbell non-active channel distance is 36 feet from device-to-device.

## Unloaded HDMI 15/9-pin Plates, Frames and Modules

Catalog No.	Description
HDMI 15/9-pin Blank, Unloaded, 1 Unit, 10-pk	<b>IMBDS1XX</b>
HDMI/15/9-pin Blank, Angled Unloaded, 1.5 Unit, 1-pk	<b>IMBDSA15XX</b>
HDMI 15/9-pin AV, Panel Mount Connector, 3.5mm, Blank, 2 Unit, 1-pk	<b>IMB153X2XX</b>
HDMI 15/9-pin, 3.5mm, Blank, 2 Unit 1-pk	<b>IMB15315XX</b>
HDMI 15/p-Pin, Decorator Frame, 1-gang, 1-pk	<b>IMISFB15XX</b>

## XX = Housing Colors

"AL" = Almond; "B" = Black; "EI" = Electric Ivory; "GY" = Gray;  
"LA" = Light Almond; "OW" = Office White; "W" = White.



## Hubbell Premise Wiring

HUBBELL INCORPORATED (Delaware)  
14 Lord's Hill Road • Stonington, CT 06378-0901 • (860) 535-8326 • 800-626-0005  
Fax: (860) 535-8328 • Internet site: <http://www.hubbell-premise.com>

## Worldwide Locations

Hubbell Premise Wiring, Asia Pacific  
Hubbell Canada Inc.  
Hubbell Premise Wiring, Central America  
Hubbell Premise Wiring, China  
Hubbell Premise Wiring, Europe  
Hubbell Wiring Systems, India  
Hubbell Int'l. Inc., Korea Branch

852-2836-7131  
905-839-1138  
506-2260-1616  
86-21-6374 2660  
44-01283 500500  
91-99-0010-3341  
(82 2) 2607 1363

Fax: 852-2836-7132  
Fax: 905-839-9108  
Fax: 506-260-1616  
Fax: 86-21-6374 2799  
Fax: 44-01283 500400  
Fax: 91-80-4022-4033  
Fax: (82 2) 2603 7386

Hubbell Premise Wiring, Latin America  
Hubbell de Mexico, S.A. de C.V.  
Hubbell Premise Wiring, Middle East  
Hubbell Premise Wiring, Puerto Rico  
Hubbell-Taian Co., Ltd., Taiwan  
Hubbell Premise Wiring, Venezuela

305-408-4501  
(5255) 9151-9999  
971-4-393-4192  
787-855-1075  
886-2-2522-1862  
58-212-5156482

Fax: 305-408-8201  
Fax: (5255) 9151-9989  
Fax: 971-4-393-4194  
Fax: 787-855-3265  
Fax: 886-2-2522-1872  
Fax: 58-212-6627258

## iSTATION™ COMPATIBLE

## Work Station and Cross-Connect Solutions


- iSTATION™ Front-loading Plates
- Decorator Frames
- iSTATION™ UDX Multimedia Panels
- iFRAME® Vertical Patch Panel

## Hubbell Delivery System

- Hubbell SystemOne Poke-Throughs and Floor Boxes
- Hubbell Surface Raceway, Metal and Non-Metallic
- Multi-Connect™ Wall Boxes/Conference Table Boxes



## HDMI PIN-OUT



Pin 1	TMDS Data2+	Pin 11	TMDS Clock Shield
Pin 2	TMDS Data2 Shield	Pin 12	TMDS Clock-
Pin 3	TMDS Data2-	Pin 13	CEC
Pin 4	TMDS Data1 +	Pin 14	Reserved (N.C. on device)
Pin 5	TMDS Data1 Shield	Pin 15	SCL
Pin 6	TMDS Data1 -	Pin 16	SDA
Pin 7	TMDS Data0+	Pin 17	DDC/CEC Ground
Pin 8	TMDS Data0 Shield	Pin 18	+5V Power
Pin 9	TMDS Data0-	Pin 19	Hot Plug Detect
Pin 10	TMDS Clock+		

## HDMI CONNECTOR TYPES

**Type A** connector has 19 pins, bandwidth supporting SDTV, EDTV, HDTV, etc. The outside dimensions of the plug is 13.9 mm wide by 4.45 mm high. Type A is electrically compatible with single-link DVI-D.

**Type B** connector is a higher resolution version defined in HDMI 1.0. Type B has 29 pins (21.2 mm wide by 4.45 mm high), allowing it to carry an expanded video channel for use with very high-resolution future displays – (WQXGA (3200x2048)). Type B is electrically compatible with dual-link DVI-D, but is not in general use.

**Type C** mini-connector is designed for portable multimedia devices (camcorders, cameras, etc). Outside dimensions (10.42 mm by 2.42 mm). Type C has the same 19-pin configuration as Type A.

Sold by:

