PRODUCT SPECIFICATIONS I INFO





16593

Description

15-Amp, 120-Volt, Compact Automatic Reset Right Angle GFCI, grounded, accomodates UL / CSA cord types SJTW, SJTOOW, SJTOW, SJEOW - BLACK

Product Features

Grounding: GFCI Ground Fault Feature: Power Indication Cord Range: .300 - .450

Voltage: 120 Volt
Amperage: 15 Amp

UL 943: Class A (GFCI)

NEMA: 5-15P Pole: 2 Wire: 3

Color: Black

Color: Black



NEMA: 5-15P




Features and Benefits

- Rainproof, Outdoor rated GFCI Module.
- Fully complies with NEC and OSHA regulations for construction sites.
- Automatically resets to ON when plugged in or after power interruption.
- Power Indicator lamp goes OFF if GFCI trips, power is interrupted or the GFCI is unplugged.
- Open-Neutral Protection immediately trips the GFCI if the neutral conductor on the line side is opened, eliminating the possibility of the GFCI having a live hot leg.
- Specially designed NEMA 3R, Raintight-While-in-Use cover available.
- UL listed; complies with UL Standard 943 as a Class A GFCI power supply.
- CSA Certified.



AC Horsepower Ratings			
At Rated Voltage	3/4 Horsepower		
Environmental Specifications			
Flammability	Rated V-2 per UL94		
Operating Temperature	-35C - 66C		
Mechanical Specifications			
Product ID	Ratings permanently marked on device		

Electrical Specifications		
Current Interrupting	2 kA	
Trip Level	5mA plus or minus 1mA	
Material Specifications		
Body Material	Polycarbonate	
Blades/Contacts	Brass	
Standards and Certifications		
NEMA	WD-6	
ANSI	C-73	
CSA Standard	C22.2 No 144	
NOM	057	

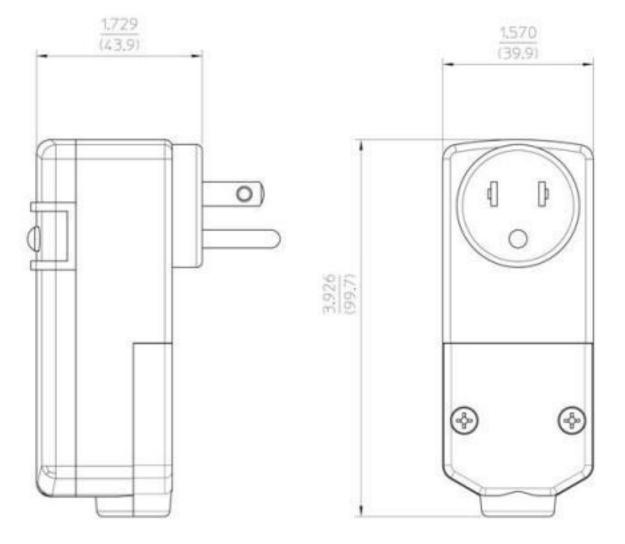

SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
JOB NUMBER:		

Leviton Manufacturing Co., Inc. 201 North Service Road, Melville, NY 11747

Telephone: 1-800-323-8920 · FAX: 1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-

Friday): 1-800-824-3005

Leviton Manufacturing of Canada, Ltd.
165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: 1-800-469-7890 ·

FAX: 1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 ·

www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2007-2009 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to: www.leviton.com/international/contacts/

