

**Large Capacity  
Flush Furniture Feed  
Fire-Rated Poke-Through  
Fittings**

# HUBBELL



Hubbell introduces a new fire-rated poke-through fitting that accommodates various communication cable capacity levels. The new single service fire-rated poke-through incorporates a two inch conduit that is designed to support up to 36 low voltage cables in one location. These two inch single service units are UL Listed for floors with a 1-2 hour

fire rating. In addition, colors of existing single and multi-service flush furniture feed fire-rated poke-throughs have been expanded to provide consistency throughout the product offering. Service fittings are available in gray, black, and brass finishes. These existing units are UL Listed for floors with a 1-4 hour fire rating.

## Features

- Two inch conduit through floor fitting.
- Combination service fitting knockout.
- 1-2 hour fire rating.
- Internal spurs for securing into cored hole.
- All brass appearance available.

## Benefits

- Supports up to 36 low voltage cables in one location.
- Accepts either 2" or 1 1/4" flexible conduit connectors.
- Superior fire barrier provides enhanced protection in a 3" cored hole.
- Installs easily from above the floor while preventing fitting from pulling out of cored hole.
- Attractive economical alternative to solid brass.

Sold by:



## ORDERING INFORMATION


### Large Capacity Furniture Feed Fire-Rated Poke-Through, low voltage applications only.

**Two-piece Option:** Order the in-floor fitting and service fitting as separate components.

In-floor fitting; less service fitting

Service fittings; (includes 2"-1 1/4" combination knockout)

Brass finished aluminum cover  
Gray painted aluminum cover  
Black painted aluminum cover

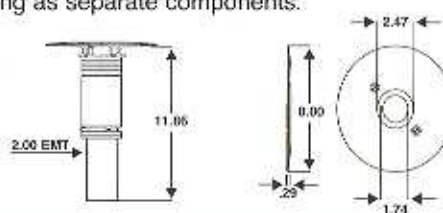

**Catalog Number**

PT2FIT

FF2BRS  
FF2GY  
FF2BK

## Specifications

### Fire Rating

For use in 1, 1 1/2 and 2 hour rated unprotected reinforced concrete floors or in 1 and 2 hour rated floors employing steel floor units and concrete topping (D900 series design).

### Floor Thickness

2.25" to 7" (57.2mm to 177.8mm).

### UL Installation Spacing

Minimum of 2 feet on centers and not more than one unit per each 65 sq. ft. of floor area in each span.

### Cored Hole

3" (76.2mm) diameter.

### Materials

Brass finished aluminum; painted aluminum.

### Conduit Tube

Low voltage - 2" EMT.

### Capacity

Accepts 36 low voltage cables at .21" diameter.

### UL Listing

Outlet box file # E31999, fire resistance R8429.

### CSA Listing

File # LR18416.


### Furniture Feed Fire-Rated Poke-Throughs, single service applications.

**Single Service Two-piece Option:** Order the in-floor fitting and service fitting as separate components.

In-floor fitting; less service fitting

Service Fittings; (Includes 1.11" knockout to accept 3/4" conduit connector)

Brass finished aluminum cover  
Gray painted aluminum cover  
Black painted aluminum cover

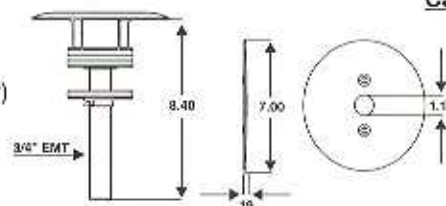

**Catalog Number**

PT71SD

FRF1BRS  
FRF1GY  
FRF1BK


### Furniture Feed Fire-Rated Poke-Throughs, single/multi-service applications.

**3-Service Two-piece Option:** Order the in-floor fitting and service fitting as separate components.

In-floor fitting; less cover and flange

Service Fittings; (Includes one 3/4" and two 1/2" die cast threaded plugs)

Gray painted aluminum cover and flange  
Black painted aluminum cover and flange

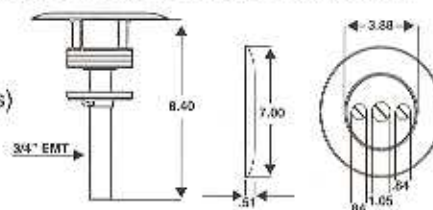

**Catalog Number**

PT73SD

FRF3GY  
FRF3BK

## Specifications

### Fire Rating

For use in 1, 1 1/2, 2, 3 and 4 hour rated unprotected reinforced concrete floors or in 1, 2 and 3 hour rated floors employing steel floor units and concrete topping (D900 Series design).

### Floor Thickness

2.25" to 7" (57.2mm to 177.8mm).

### UL Installation Spacing

Minimum of 2 feet on centers and not more than one unit per each 65 sq. ft. of floor area in each span.

### Cored Hole

3" (76.2mm) diameter.

### Materials

Brass finished aluminum, painted die cast aluminum.

### Conduit Tubes

Power - 3/4" EMT, accepts up to six #12 AWG and two #10 AWG type THHN wires or up to ten #12 AWG type THHN wires.

Low Voltage - 1/2" EMT.

### UL Listing

Outlet Box File # E31999, fire resistance R8429.

Sold by:



## Wiring Device - Kellems

Hubbell Incorporated (Delaware) • 185 Plains Road • Millford, CT 06460-2420 • (203) 882-4800 • FAX (800) 255-1031  
World Wide Web URL: <http://www.hubbell-wiring.com>

### Worldwide Locations

Hubbell Canada (905) 839-1138, Fax (905) 839-9108  
Hubbell Ltd. England (441) 234-85444, Fax (441) 234-854008  
Hubbell-Taiwan Co., Ltd., (886) 2 567-5995, Fax (886) 2 567-4853

Hubbell de Mexico, S.A. de C.V. (52) 5 575-2022, Fax (52) 5 559-8626  
Caribe Sales Agencies, Puerto Rico (809) 720-7185, Fax (809) 789-2796

Printed in U.S.A. Specifications subject to change without notice. ® Registered trademark of Hubbell Incorporated

H4773