


Fire-Rated Poke-Throughs
Pedestal Series



Hubbell has a complete line of pedestal series fire-rated poke-throughs including 2, 4, and 6 gang pedestals and your choice of 2" (50.8) or 3" (76.2) diameter through-floor fittings. The 2 gang pedestal is offered in either traditional style (brushed aluminum with stainless steel face plates) or in the sleek low-profile style (aluminum with gray or black textured paint).

- Choose from two styles or three sizes of service pedestals.
- Load pedestals with the widest variety of power & voice/data devices.
- 4 and 6 gang pedestals can be configured for different power & voice/data combinations.
- Available with 2" (50.8) or 3" (76.2) diameter through-floor fittings.
- Unequaled through-floor wiring capacity.
- 4 Hour Fire Rating: All Hubbell pedestal series poke-throughs are UL Listed and UL classified for fire resistance in 1-4 hour rated floors. Canadian series units are CSA classified.

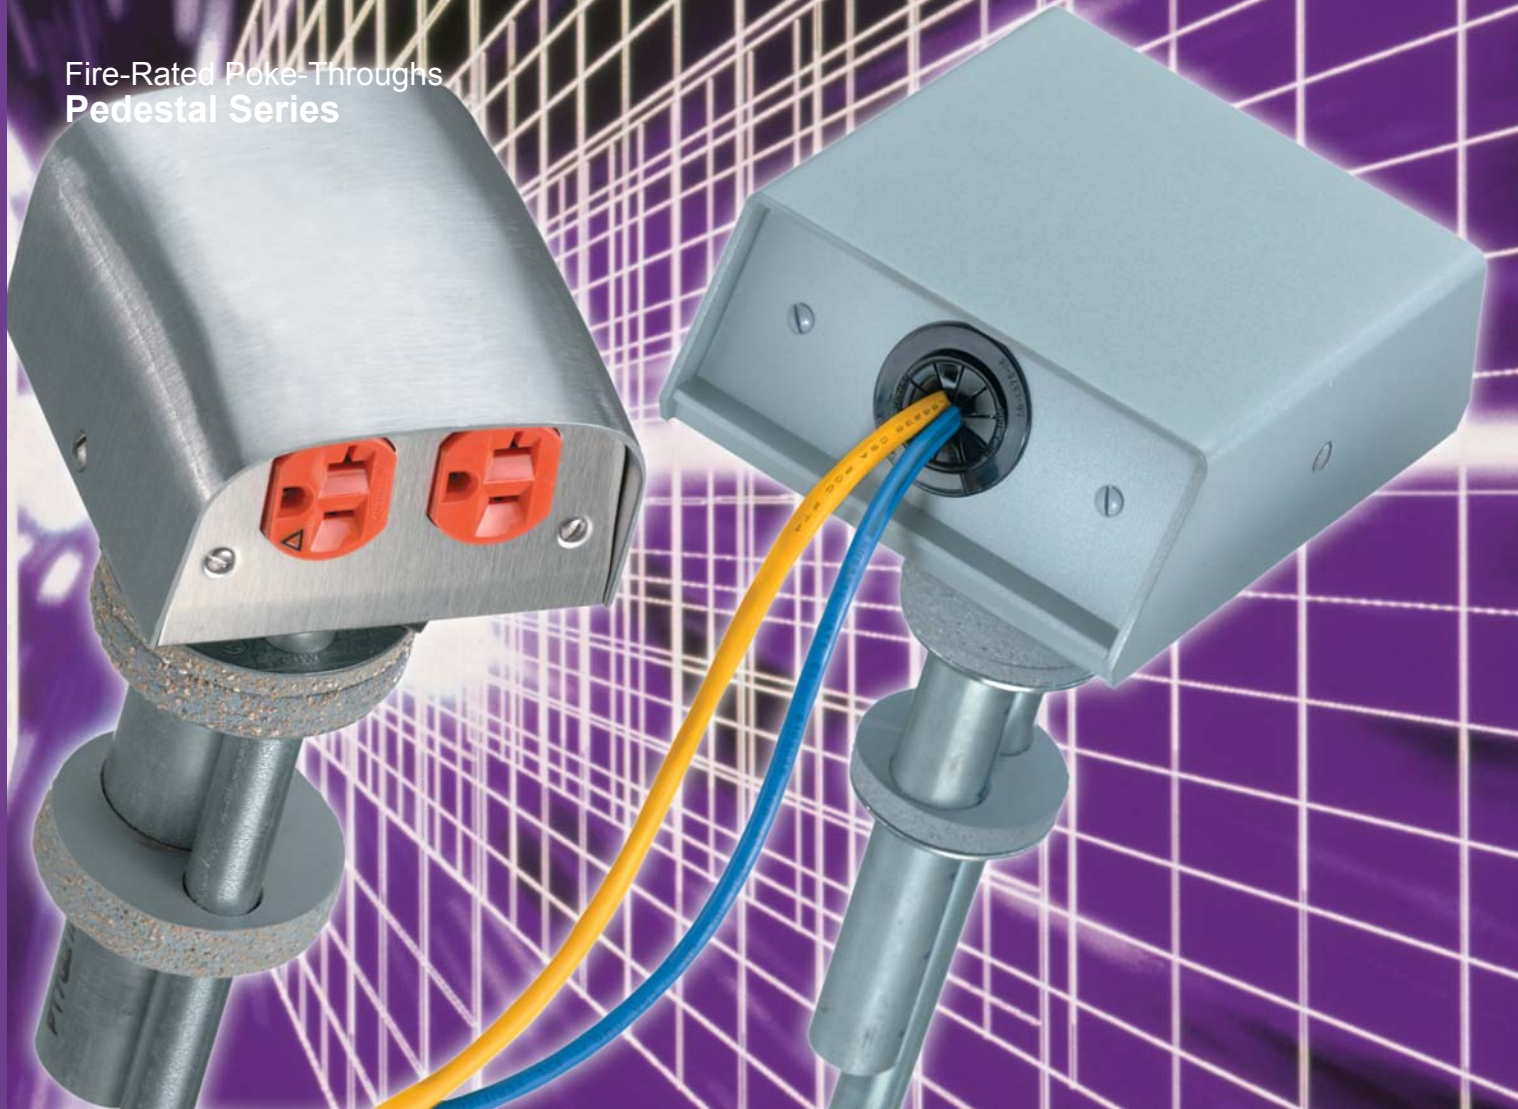

Fire-Rated Poke-Throughs Pedestal Series- Painted Aluminum



Two-Gang Pedestals

Create your own unique two-gang pedestal (one-gang front & one-gang back) by selecting the appropriate power and voice/data devices and corresponding one-gang face plates (see page M-22). This service pedestal is used with PT27A (2" [50.8] dia.) through-floor fitting. See page M-23 for detailed product information on the PT27A.

Description	Color	Catalog Numbers
Aluminum pedestal housing, frame and low voltage barriers, excludes devices and face plates.	Gray Black	FR280GYA FR280BKA

Note: See pages M-25–26 for dimensional data and device options.



FR280BKA

Four-Gang Pedestals

Four-gang pedestals provide two-gang front & two-gang back capability. Select the appropriate power and voice/data devices and corresponding one-gang face plates (see page M-22). This service pedestal is used with PT27A (2" [50.8] dia.) or PT7XC (3" [76.2] dia.) through-floor fitting. See page M-23 for detailed product information on the PT27A and PT7XC.

Description	Color	Catalog Numbers
Aluminum pedestal housing, frame and low voltage barriers, excludes devices and face plates.	Gray Black	FR480GYA FR480BKA

Note: See pages M-25–26 for dimensional data and device options.



FR480GYA

Six-Gang Pedestals

Six-gang pedestals provide three-gang front & three-gang back capability. Select the appropriate power and voice/data devices and corresponding one-gang face plates (see page M-22). This service pedestal is used with PT27A (2" [50.8] dia.) or PT7XC (3" [76.2] dia.) through-floor fitting. See page M-23 for detailed product information on the PT27A and PT7XC.

Description	Color	Catalog Numbers
Aluminum pedestal housing, frame and low voltage barriers, excludes devices and face plates.	Gray Black	FR680GYA FR680BKA

Note: See pages M-25–26 for dimensional data and device options.



FR680BKA

Low Voltage Barrier

Low voltage barriers for applications requiring additional separation of power and low voltage services.

Description	Catalog Number
Low voltage barrier (optional).	FRBR1



FRBR1



Dimensions in Inches (mm)

Fire-Rated Poke-Throughs Pedestal Series – Painted Aluminum

ScrubShield™
Complies with UL514A



SS2309DGYA



SS2309SGYA



SS2309BGYA



SS2309FGYA



SS2309F1BKA



SS2309TGYA




SS2309SLBKA

Face Plates

A variety of one-gang face plates are offered for the painted aluminum pedestals to meet your application needs. These painted aluminum plates are available in gray and black to match pedestal housings. Order one face plate per pedestal gang.

Description	Color	Catalog Numbers
Duplex receptacle opening.	Gray Black	SS2309DGYA SS2309DBKA
Single receptacle opening for 1.36" to 1.39" face diameter.	Gray Black	SS2309SGYA SS2309SBKA
Blank.	Gray Black	SS2309BGYA SS2309BBKA
Furniture feed with 1.11" KO to accept 3/4" flexible metal conduit connector.	Gray Black	SS2309FGYA SS2309FBKA
Furniture feed with 1.36" KO to accept 1" flexible metal conduit connector.	Gray Black	SS2309F1GYA SS2309F1BKA
Voice/Data with 1" ID (25.4) bushed opening.	Gray Black	SS2309TGYA SS2309TBKA
Style Line opening for Style Line, GFCI, surge receptacles and communication outlets.	Gray Black	SS2309SLGYA SS2309SLBKA

Note: See pages M-25--26 for dimensional data and device options.

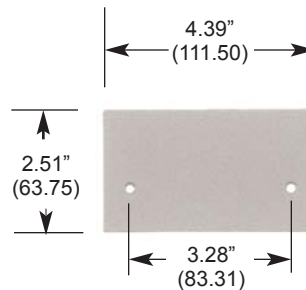

Fire-Rated Poke-Throughs Pedestal Series – Painted Aluminum

ScrubShield™
Complies with UL514A



2 Inch Through-Floor Fitting

Description	Catalog Number
Through-floor fitting to be installed in a 2" (50.8) diameter hole. Contains 3/4" EMT tube for low-voltage cabling and 1/2" EMT tube for power wiring for use with Hubbell FR280, FR480 and FR680 series pedestals. This unit will accommodate floor thicknesses of 2 1/4" to 7 inches (57.2 to 177.8).	PT27A

Note: Hubbell PT27A through-floor fitting is approved for use in the city of Chicago.



PT27A

3 Inch Through-Floor Fitting

Description	Catalog Number
Through-floor fitting to be installed in a 3" (76.2) diameter hole. Contains 1 1/4" EMT tube for low-voltage cabling and 1/2" EMT tube for power wiring for use with Hubbell FR480 and FR680 series pedestals (not for two-gang FR280 pedestals.) This unit accommodate floor thicknesses of 2 1/4" to 7 inches (57.2 to 177.8).	PT7XC

Note: Hubbell PT27A through-floor fitting is approved for use in the city of Chicago.



PT7XC

Extension Kit

Description	Catalog Number
Used to extend the floor thickness range of the Hubbell PT7XC through-floor fitting when concrete floor thickness range is between 7 and 13 inches (177.8 to 330.2). Kit includes 1/2" x 6" long EMT tube, 1 1/4" long EMT tube, 1/2" EMT coupling and 1 1/4" EMT coupling.	EXT13



EXT13

