Hubbell Fire-Rated Poke-Throughs

Featuring the innovative capabilities of Hubbell's SystemOne Delivery System line, Hubbell has expanded its offering of Fire-Rated Poke-Through (FRPT) products, making it the most extensive in the industry. Hubbell SystemOne FRPTs install in a 4"core hole and provide users the flexibility to create personal solutions for their most demanding applications.

For those requiring a 3" diameter FRPT, Hubbell continues to provide a wide variety of traditional solutions for flush, pedestal and furniture feed applications. All Hubbell FRPT products include a "step-down" feature, enabling wiring, installation and if necessary, removal from the floor above.

Whatever combination of power, data and audio/video connections are required, Hubbell provides the answer; bringing consistent, aesthetic and functional solutions to the desktop.





Multi-Service Applications

This Hubbell SystemOne subplate incorporates 2 Style Line® rectangular openings. These can be used for a variety of power and/or data applications. It will accommodate 15 or 20 amp, standard, isolated ground, GFCI or surge protected duplex receptacles. Using communication frames it can provide up to a 6-port multi-service or a 12-port all communication solution.



Multimedia Applications


Other Hubbell SystemOne subplates are designed to meet the growing needs of the audio and video markets. Some subplates provide power outlets with Hubbell's audio/video products including 15-Pin SVGA, RCA, S-Video, 3.5mm stereo, and XLR microphone jacks. Another subplate can accommodate Extron® Electronics's MAAP and AAP series audio/video modules.



4X4 Applications

Provides maximum power capacity for flush, multi-service applications. This sub-plate features a pre-wired four outlet 20A, 125V receptacle and four openings for snap-in flush mount Hubbell modular jacks and audio/video snap-in connectors.



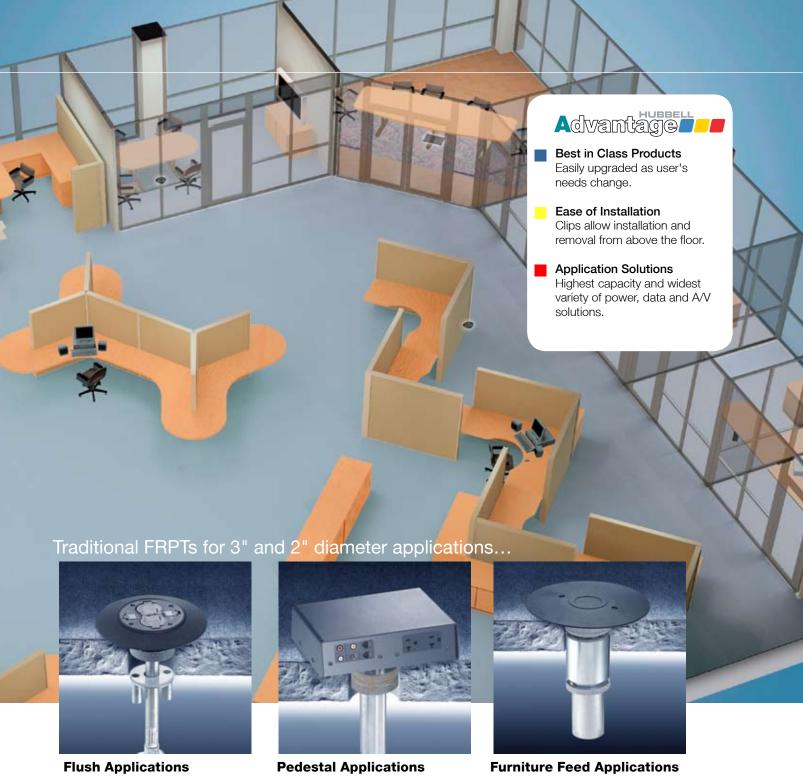

Hubbell offers a variety of single and multi-service flush fire-rated poke-through products. It incorporates a Hubbell Style Line®, 20 amp, duplex receptacle and two Hubbell Category 5e data jacks. The jacks mount flush to the cover for an unobtrusive appearance. Various colors and all brass versions are available.

Hubbell offers single and multiservice pedestal style FRPTs for those applications requiring above-the-floor connections. Available in 2, 4 or 6 gang sizes, pedestal FRPTs provide additional power and low voltage connections to the desktop than most flush configurations in a 3" core hole. Hubbell offers single and multiple service flush and pedestal style FRPTs that deliver power and voice/data cabling to feed furniture systems. Various models can feed up to 2" conduit and can accommodate up to 36 Category 5e data cables.



Flush Duplex FRPT 3" Diameter - One Piece Units

Catalog Number
PT7FSDBLA Black
PT7FSDGYA Gray
PT7FSDIA Ivory
PT7FSDBRA Brown
PT7IGFSDGYA* Gray
PT7IGFSDIA* Ivory

* Includes pre-wired 20A isolated ground duplex receptacle.

Complete assembled unit

- PT7FSD through-floor fitting.
- Pre-wired 20A duplex receptacle.
- Non-metallic flip lid cover with (2) ½" diameter low voltage feed through holes.
- Painted aluminum flange.

Flush Aluminum Poke-Through



Catalog Number

PT7FSDBRS2A All Brass PT7FSDBRS3A Black/Brass PT7IGFSDBRSA* All Brass

* Includes pre-wired 20A isolated ground duplex receptacle.

Complete assembled unit

- PT7FSD through-floor fitting.
- Pre-wired 20A duplex receptacle.
- All brass or black non-metallic cover option.
- Flip lid cover with (2) ½" diameter low voltage feed through holes.
- Solid brass flange.

Flush Brass Poke-Through



Flush FRPT 3" Diameter - Two Piece Units

Through-Floor Fitting

Catalog Number

PT7FSD (with Junction Box)
PT73SD (without Junction Box)

Through-floor fitting with (1) ¾" trade size conduit stem for power and (2) ½" low voltage feed through holes.

Multi-Channel Through Floor Fitting



Specifications:

- UL Listed and CSA Certified.
- 1- 4 hour fire rating (1-3 hour for steel floor units and concrete topping, D900 Series Design).
- For 2 1/4" to 7" floor thickness.
- UL installation spacing. Minimum 2 ft. on center and not more than 1 per 65 sq. ft. of floor area.

Service Fittings

Catalog Number

FRFBLA Black
FRFGYA Gray
FRFIA Ivory
FRFBRA Brown

- Pre-wired 20A duplex receptacle.
- Non-metallic flip lid cover with (2) ½" diameter low voltage feed-through holes.
- Painted aluminum flange.






Catalog Number

FRFBRS2A Solid Brass

Flush Brass Service Fitting



- Solid brass flip lid cover with (2) ½" diameter low voltage feed-through holes.
- Solid brass flange.



Accessories

Catalog Number

PFBRCBLA Black
PFBRCBGYA Gray
PFBRCIA Ivory
PFBRCBRA Brown

Non-Metallic Replacement Covers



Catalog Number

BRS2RCA Solid Brass

All Brass
Replacement Covers





