

## MB29C2

Cable Tie Mount-Low Profile .807"X.490" - PA66, Natural, T18-T50 Cable Ties, #8 Screw, 100/pk

Article Number: 151-00227

Part Number: MB29C2


Type: MB2



### 1. Base Data

|                           |   |
|---------------------------|---|
| <b>Part No.</b>           | MB29C2  |
| <b>Type</b>               | MB2   |
| <b>Color</b>              | Natural   |
| <b>Features</b>           | The MB2 low profile mount accomodates the T18 through T50 series cable ties.        |
| <b>Application</b>        | Low profile mounts are intended for use in securing bundles where space is limited. |
| <b>Application Method</b> | Each mount is fastened with a single #8 screw.                                      |

### 2. Product Dimensions

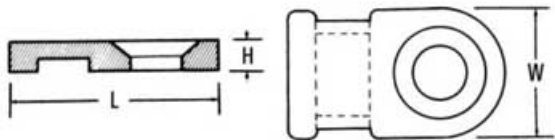

|                             |                   |
|-----------------------------|-------------------|
| <b>Length (L)</b>           | .807 " / 20.50 mm |
| <b>Width (W)</b>            | .490 " / 12.45 mm |
| <b>Max. Cable Tie Width</b> | 5.0 mm            |
| <b>Height (H)</b>           | .130 " / 3.30 mm  |
| <b>Height (H2)</b>          | 1.7 mm            |
| <b>Mounting Hole Ø</b>      | .197 " / 5.0 mm   |

### 4. Material and Specifications

|                          |                      |
|--------------------------|----------------------|
| <b>Material</b>          | Polyamide 6.6 (PA66) |
| <b>Material Shortcut</b> | PA66                 |
| <b>Flammability</b>      | UL94 V2              |

**Operating Temperature** -40 °F to +185 °F (-40 °C to +85 °C) continuous

**ROHS Conformity** 

### Logistic and Packaging

---

|                       |             |
|-----------------------|-------------|
| <b>Packaging Type</b> | bag         |
| <b>Pkg. Qty.</b>      | 100         |
| <b>Carton Qty.</b>    | 15000       |
| <b>UPC</b>            | 08930602304 |

---

This product was found in [Mounts](#) > [Screw Mount](#)

© HellermannTyton North America 2008 | [TS16949:2002](#), [ISO 9001:2000](#) and [ISO14001 Certified](#)

7930 N. Faulkner Rd. Milwaukee, WI 53224-9517 | Fax: 800-848-9866 | Phone: 800-537-1512

