

SpeedStar™ Universal CAT5e Data Jack

568A/B CAT5e Data Jack



Product Description

Suttle's 8 position, 8 conductor CAT5e data jacks which feature dual-color coded wiring labels with both T568A & T568B wiring patterns, for dual flexibility in a single connector, plus fast, accurate 110 termination of station wiring. Available in a white housing, each jack comes with multi-color bezels for your installation.

Features

- Easy installation from rear of faceplates
- Terminates with standard 110 termination tools
- Dust covers for IDC terminations - added protection
- Compatible with Speedstar™ product bezels, faceplates, and surface mount housings

Specifications


Product Spec

Wiring	-----	568A & 568B
Insertion life:	-----	750 cycles minimum modular plug
Housing	-----	High impact, UL 94V-0 rated thermoplastic
Contacts	-----	100 micro-inch nickel with minimum 50 micro-inch of gold
IDC Blocks	-----	Tin lead plated connector accepts 22-26 AWG solid and stranded UTP cable
Requirements	-----	Complies with TIA/EIA CAT5e specifications /FCC registered

Electrical Spec

Contact Pressure	-----	100 grams min.
Insulation Resistance	-----	500 MΩ
Dielectric Withstand	-----	1000 VAC RMS @ 60Hz min.
Contact Resistance	-----	10 mΩ max.

Outline Dimensions

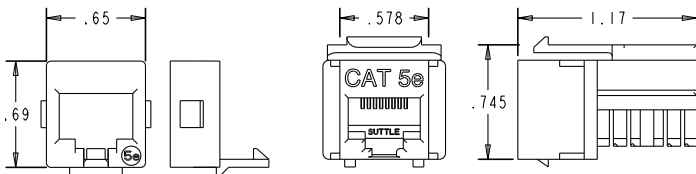

Ordering Information

Product Number

2-7001

Description

8-position, 8-conductor, CAT5e data jack, 568A/B wiring, 110 IDC blocks, includes 8 colored bezels*

*Bezel Colors: White (85), Light Almond (64), Elec Ivory (52), Green (51), Red (53), Yellow (56), Blue (62), Orange (97)

Specifications subject to change without notice. Copyright 2009 Revision: 06/09