


Product Specifications



1100 GS3-DM

Material ID: 760065771

GigaSPEED® XL 1100GS3 Category 6 U/UTP Modular Patch Panel Distribution Modules

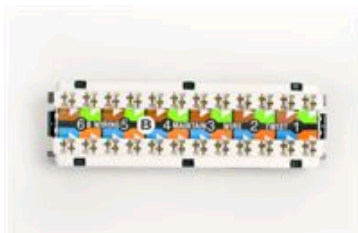

CHARACTERISTICS

Electrical Specifications

ANSI/TIA Category 6

Environmental Specifications

Flammability Rating UL 94 V-0
Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)
Relative Humidity Up to 95%, non-condensing
Safety Standard cUL | UL
Storage Temperature -40 °C to +70 °C (-40 °F to +158 °F)

General Specifications

Brand GigaSPEED® XL | SYSTIMAX®
Cable Type U/UTP (unshielded)
Modules, quantity 1
Product Type Module
Total Ports, quantity 6
Color Black
Package, quantity 1

Mechanical Specifications

Material Type High-impact, flame retardant, thermoplastic

Regulatory Compliance/Certifications

Agency
RoHS 2002/95/EC
ISO 9001:2000

Classification
Compliant
Compliant

SYSTIMAX®
SOLUTIONS
www.commscope.com

©2010 CommScope, Inc. All rights reserved.
All trademarks identified by ® or ™ are registered trademarks or trademarks, respectively, of CommScope.
All specifications are subject to change. See www.commscope.com for the most current information.

Product Specifications

1100 GS3-DM - Material ID: 760065771

