


Middle Atlantic Products

EXCEPTIONAL SUPPORT & PROTECTION™

PDT Series Thin Power Distribution




High density power strips feature a slim, low-profile design

Features

- Slim low-profile design requires minimum space
- Up to 20 outlets depending on model
- Lightweight aluminum chassis
- Field configurable single or dual circuits available in both 15 & 20 amp models
- Field configurable isolated ground models available
- Mounting hardware included
- Corded models include 10' SignalSafe™ power cord terminated with NEMA 5-15P / 5-20P / L5-20P plug depending on model
- Black anodized finish
- Top feed models available
- ETL Listed in the US and Canada

* For additional Vertical Power Strips, please see A&E Spec # 96-938 and #96-976

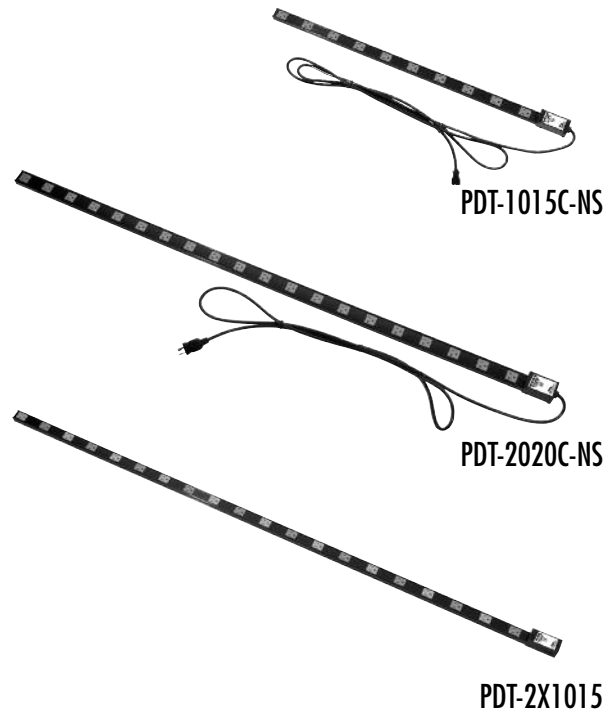

Architects' and Engineers' Specifications

High density thin power distribution shall be Middle Atlantic Products model # PDT-___-___ with ___ outlets and ___ amps (refer to chart). Thin power distribution shall be ___ long (refer to chart) x 1" deep x 1.9" (20 amp models) or 1.3" (15 amp models) wide. J-Box shall be 2" deep X 2" (20 amp models) or 1.5" (15 amp models) wide. Thin power distribution shall feature ___ NEMA 5-15R / 5-20R outlets (refer to chart). Corded power strip include ___ amp protection and mounting hardware (refer to chart). Corded models shall be terminated with 10' SignalSafe™ power cord and NEMA 5-15P / 5-20P / L5-20P plug (refer to chart). PDT Series shall feature a black anodized finish. Regular and top feed models shall be provided to accommodate installations where ground prongs must be positioned at the top of each outlet. PDT Series with J-Box shall feature field configurable single or dual circuits available in both 15 & 20 amp models. PDT Series with J-Box shall feature field configurable isolated ground models. PDT Series shall be ETL listed to UL Standard 1363 in the US and to CAN/CSA C22.2 #21 in Canada. PDT shall be GREENGUARD Indoor Air Quality Certified for Children and Schools. PDT shall be RoHS EU Directive 2002/95/EC compliant. PDT shall be manufactured by an ISO 9001 registered company. PDT shall be warranted to be free from defects in material or workmanship under normal use and conditions for a period of three years



CUSTOMIZABLE SPECIFICATION CLIPS AVAILABLE AT MIDDLEATLANTIC.COM



PDT Series power strips basic dimensions

20 Outlet
20 Amp


20 Amp
Top Feed

20 Outlet
15 Amp

15 Amp
Top Feed

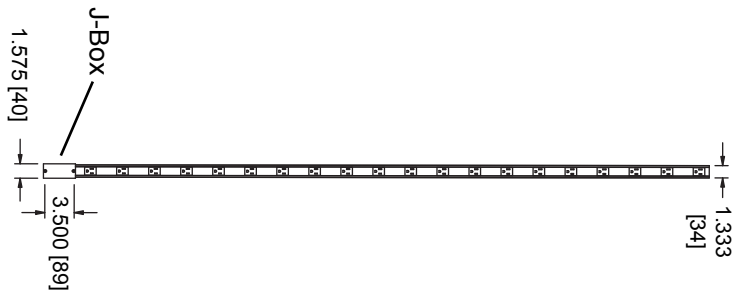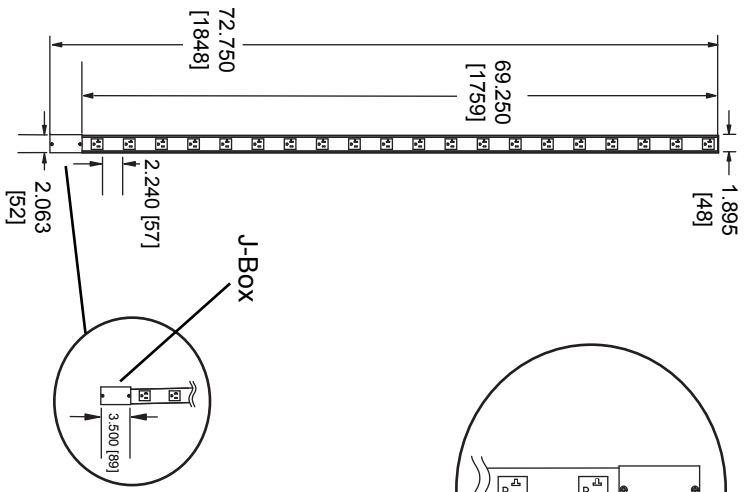

PDT-1015C-NS PDT-1020C-NS

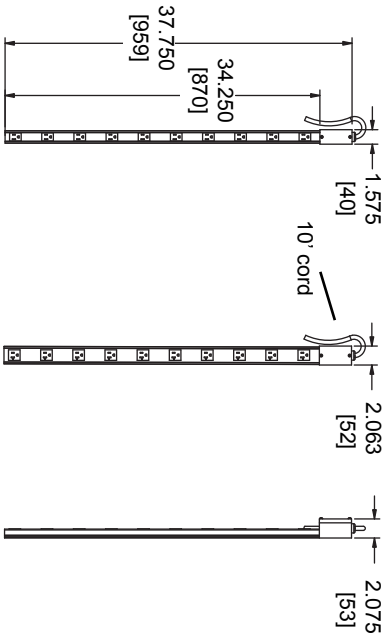

FRONT VIEW

SIDE VIEW

FRONT VIEW

SIDE VIEW

PART #	TERMINATED	CORD LENGTH	CIRCUIT	# OF OUTLETS	OVERALL LENGTH	UL LISTED
PDT-2015C-NS	5-15P	9'	15 AMP (1)	20, 5-15R	72-3/4 [1848]	1
PDT-2020C-NS	5-20P	9'	20 AMP (1)	20, 5-20R	72-3/4 [1848]	1
PDT-2X1015	J-BOX	-	15 AMP (2)	20, 5-15R	72-3/4 [1848]	2
PDT-2X1015T	J-BOX	-	15 AMP (2)	20, 5-15R	72-3/4 [1848]	2
PDT-2X1020	J-BOX	-	20 AMP (2)	20, 5-20R	72-3/4 [1848]	2
PDT-2X1020T	J-BOX	-	20 AMP (2)	20, 5-20R	72-3/4 [1848]	2
PDT-1015C-NS	5-15P	9'	15 AMP (1)	10, 5-15R	37-3/4 [959]	1
PDT-1015C-NS20	5-15P	20'	15 AMP (1)	10, 5-15R	37-3/4 [959]	1
PDT-1020C-NS	5-20P	9'	20 AMP (1)	10, 5-20R	37-3/4 [959]	1
PDT-2020T-NS	L5-20P	9'	20 AMP (1)	20, 5-20R	72-3/4 [1848]	1

All dimensions in inches unless otherwise noted [All dimensions in brackets are millimeters]

