

Type 3 Point-of-Use Surge Strips

Specifications and Features

Plug Strips (S1000 and S2000 Series)

- Slim, right-angle plug
- Ground pin to outside for more transformer configurations
- Diagnostic LEDs for surge protection, polarity and ground verification
- Resettable circuit breaker
- Power line carrier compatible
- Audible alarm indicates loss of protection
- Four non-skid rubber feet on the bottom
- Provides excellent surge suppression and EMI/RFI noise attenuation for microprocessor-driven electronic equipment
- Three-stage protection: line-to-neutral, line-to-ground, neutral-to-ground
- Built-in overload circuit-breaker switch with reset button
- Indicator lights confirm unit is operating and properly grounded
- Clamping voltage: 400V all modes

S1000 & S2000 SERIES PLUG STRIPS

| Description | Number of Outlets | Cord Length | Cat. No. |
|--|-------------------|-------------|-----------|
| S1000 Series Power Surge Strip | 6 | 6 ft. | S1000-OPS |
| S1000 Series TELCO/ CATV/SAT Surge Strip | 6 | 6 ft. | S1000-PTC |
| S1000-S15 Series Power Surge Strip | 6 | 15 ft. | S1000-S15 |
| S1000-NS Non-Surge, | 6 | 6 ft. | S1000-NS |
| S2000 Series Power Surge Strip | 9 | 6 ft. | S2000-OPS |
| S2000-S15 Series Power Surge Strip | 9 | 15 ft. | S2000-S15 |
| S2000 Series TELCO/ CATV/SAT Surge Strip | 9 | 6 ft. | S2000-PTC |



S1000

TESTING AND CODE COMPLIANCE

Plug Strips S1000 and S2000 Series

- CSA Certified
- UL Listed 1449
- Meets ANSI/IEEE C62.41 Edition 2.5 and C62.45


MATERIAL CHARACTERISTICS

- Operating Temperature: -10°C to 60°C
- Storage Temperature: -20°C to 85°C




S2000

DIMENSIONS

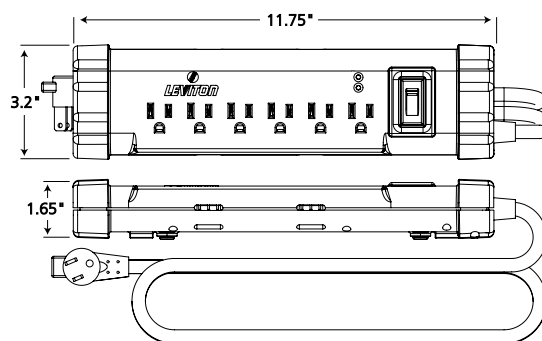

S1000

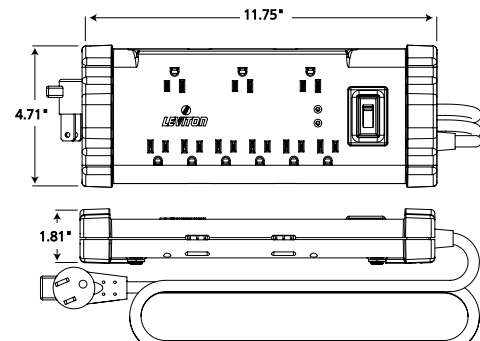

S2000