Closet Connector Housing Panels (CCH-CP)

A LANscape® **Solutions Product**

features and benefits I

Universal design approach

One-size-fits-all LANscape® Solutions


housings

Broadest range of fiber count and adapter types Solutions for all needs

Colored icon labeling


Easy connector identification

Corning Cable Systems Closet Connector Housing Panels (CCH-CP) are offered in a variety of fiber counts for use with LANscape® Solutions hardware products for a "one-size-fits-all" approach. Used with factory-installed or field-installable connectors, these panels provide interconnect or cross-connect capability in a housing at main cross-connects, intermediate cross-connects, telecommunication rooms or work areas. Available with a variety of industry-standard adapter types, the CCH-CP provides an efficient way to securely mate two connectors and offers multimode and single-mode applications in 6-, 8-, 12-, 16- and 24-fiber count options, plus 36-, 72-, 96- and 144-fiber count options with MTP® Connector adapters.

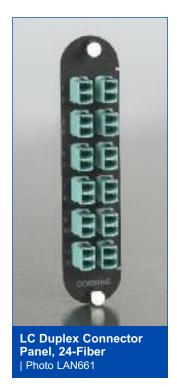





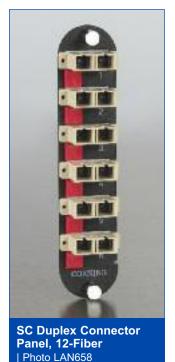



TWAcommocom http://www.TWAcomm.com Toll Free: (877) 389-0000



Closet Connector Housing Panels (CCH-CP)

2

A LANscape® Solutions Product

ordering information |

CCH - CP		-		
	 1	2		

1

Select fiber count.

06 = 6 fibers

08 = 8 fibers

12 = 12 fibers

16 = 16 fibers

24 = 24 fibers

36 = 36 fibers

72 = 72 fibers

96 = 96 fibers

E4 = 144 fibers

See Note 1.

Select adapter code (see Adapter/Connector Code Options table on following page). Note:

Fiber count for desired adapter is available in table on following page.

Part Number Example

Part Number	Description
CCH-CP12-A9	Closet Connector Housing Pigtail Panel with 6 LC duplex single-mode adapters





Closet Connector Housing Panels (CCH-CP)

A LANscape® **Solutions Product**

adapter/connector code options |

A -l t				Eib au/	Available Fiber/Panel Counts								
Adapter Code	Fiber Type	Alignment	Housing	Fiber/ Adapter	6	8	12	16	24	36	72	96	144
LC Duplex													
A7	62.5 µm multimode	Metal	Composite	2			Χ		Χ				
D3	50 µm multimode	Ceramic	Composite	2			Χ		Χ				
E4	50 μm LOMMF*	Ceramic	Composite	2		Χ	Χ	Χ	Χ				
A9	Single-mode, UPC	Ceramic	Composite	2		Х	Χ	Х	X				
SC Duplex													
91	62.5 µm multimode	Metal	Composite	2		Χ							
G7	50 µm multimode	Ceramic	Composite	2		Χ							
E7	50 µm LOMMF*	Ceramic	Composite	2		Χ	Χ						
59	Single-mode, UPC	Ceramic	Composite	2		Χ	Χ						
sc													
56	62.5 µm multimode	Metal	Composite	1	Χ	Χ	Χ						
G6	50 µm multimode	Ceramic	Composite	1		Χ							
E6	50 µm LOMMF*	Ceramic	Composite	1		Χ							
3C	Single-mode, UPC	Ceramic	Composite	1		Χ							
6C	Single-mode, APC	Ceramic	Composite	1		Χ							
ST® Compa	tible Connector												
25T	62.5 µm multimode	Metal	Metal	1	Х	Χ	Χ						
15T	62.5 µm multimode	Ceramic	Metal	1		Χ							
G5	50 µm multimode	Ceramic	Metal	1		Χ							
H3	50 µm LOMMF*	Ceramic	Metal	1		Χ							
19T	Single-mode, UPC	Ceramic	Metal	1		Χ							
FC													
11	Single-mode, UPC	Metal	Metal	1	X	Χ	X						
21	Single-mode, APC	Metal	Metal	1		X							
MTD® Conn													
MTP® Conn		NI/A	Composito	10						V	v	Х	Χ
69 G3	62.5 µm multimode	N/A	Composite	12 12						X	X		
E3	50 µm multimode 50 µm LOMMF*	N/A N/A	Composite	12						X X	X	X X	X X
89		N/A N/A	Composite	12						X	X	x	X
90	Single-mode, UPC Single-mode, APC	N/A N/A	Composite Composite	12						X		X	
	3												
MT-RJ	CO E	NI/A	On	0		V	v	V	v				
97	62.5 µm multimode	N/A	Composite	2			X		X				
G1	50 µm multimode	N/A	Composite	2			X		X				
E1	50 µm LOMMF*	N/A	Composite	2				X					
98	Single-mode, UPC	N/A	Composite	2		Χ	Х	Χ	Х				
Fiber Type		Housing Color											
62.5 µm multi	mode	Beige											
50 µm multim		Black											
50 µm LOMM		Aqua											
		Blue											
Single-mode,													

^{*}LOMMF = Laser-optimized multimode fiber.





Closet Connector Housing Panels (CCH-CP)

A LANscape® **Solutions Product**

ordering information | (continued)

colored Icons (pack of 50)
ICN - 🗆 🗆 🗆
1
elect icon. Iank Icons
LB = Blank (Yellow) DB = Blank (Red) RB = Blank (Green) LB = Blank (Blue) /TB = Blank (White)
tched Icons
LP = Phone (Blue)
DC = Computer (Red)
CATV

Corning Cable Systems LLC • PO Box 489 • Hickory, NC 28603-0489 USA 800-743-2675 • FAX: 828-901-5973 • International: +1-828-901-5000 • www.corning.com/cablesystems

Corning Cable Systems reserves the right to improve, enhance and modify the features and specifications of Corning Cable Systems products without prior notification. LANscape and MIC are registered trademarks of Corning Cable Systems Brands, Inc. MTP is a registered trademark of USConec, Ltd. ST is a registered trademark of Lucent Technologies. All other trademarks are the properties of their respective owners. Corning Cable Systems is ISO 9001 certified. © 2007, 2009 Corning Cable Systems. All rights reserved. Published in the USA. LAN-133-EN / April 2009







GRT = Cable TV (Green)