




FuseConnect MPO Connectors, Cable

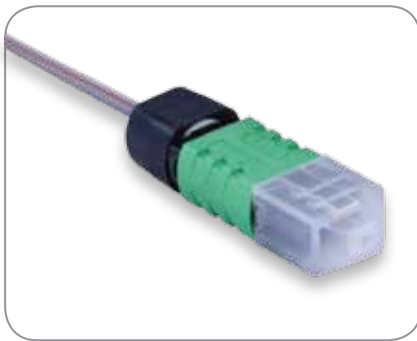

FuseConnect MPO Connectors, Ribbon

FuseConnect™ MPO Fusion Spliced Field-Terminated Connectors

AFL's FuseConnect MPO fusion-spliced, field-terminated connectors are uniquely designed and feature just six components. With a factory pre-polished ferrule, its innovative field-termination process eliminates polishing, adhesives, and crimping in the field minimizing the potential for operator error and expensive connector scrap.

Designed to Fiber Optic Connector Intermateability Standard (FOCIS), Type MPO, FOCIS-5, TIA-604-5-C, AFL's FuseConnect MPO performs as an equivalent to the standard factory terminated MPO/MTP® assemblies. Designed to utilize either ribbon or loose tube cable, this connector helps to minimize the complexity involved in the termination of a multi-fiber connection, allowing for a reliable and repeatable termination in field applications.

FuseConnect MPO is part of the FuseConnect series splice-on connector which includes the SC, LC, ST, and FC that require a fusion splicer and accessories for installations. The AFL FuseConnect MPO Termination Kit specifically provides all the necessary accessories required for field termination of the FuseConnect MPO.

Features

- Field installable splice-on connector
- Only six components
- No adhesives, crimping or polishing
- TIA-568-C.3, IEC-61754-7, and TIA/EIA-604-5 FOCIS 5 Compliant
- Field MPO polarity customization
- Include 3.0 mm round and optical fiber ribbon flat boots in each pack

Applications

- Connectorization in:
 - RF-overlay FTTP networks
 - Cable TV backbone networks
 - Outside plant
 - MDU FTTP Cabling
- Connector restoration in the field
- Data center installation
- Patch cord customization in the field

Specifications

PARAMETER		VALUE
Insertion Loss	Single-mode (OS1)	Average: 0.25 dB; Max: 0.75 dB
	62.5/125 (OM1)	Average: 0.10 dB; Max: 0.35 dB
	50/125 (OM2)	Average: 0.10 dB; Max: 0.35 dB
	50/125 LO (OM3)	Average: 0.10 dB; Max: 0.35 dB
Return Loss	Single-mode (OS1)	> 65 dB
	62.5/125 (OM1)	> 30 dB
	50/125 (OM2)	> 30 dB
	50/125 LO (OM3)	> 30 dB
Operating Temperature		-40°C to +75°C



FuseConnect™ MPO Fusion Spliced Field-Terminated Connectors

Ordering Information

AFL NO.*	CONNECTOR TYPE	FIBER TYPE	POLISH	CABLE SIZE		HOUSING COLOR
				ROUND	FLAT	
FUSEMPO-SMA-3-M-6	MPO, Male (guide pins)	Single-mode (OS1)	APC	3.0 mm	250 μm	Green
FUSEMPO-SMA-3-F-6	MPO, Female (No Guide Pins)	Single-mode (OS1)	APC	3.0 mm	250 μm	Green
FUSEMPO-MM6-3-M-6	MPO, Male (guide pins)	Multimode 62.5 μm (OM1)	PC	3.0 mm	250 μm	Beige
FUSEMPO-MM6-3-F-6	MPO, Female (no guide pins)	Multimode 62.5 μm (OM1)	PC	3.0 mm	250 μm	Beige
FUSEMPO-MM5-3-M-6	MPO, Male (guide pins)	Multimode 50 μm (OM2)	PC	3.0 mm	250 μm	Black
FUSEMPO-MM5-3-F-6	MPO, Female (no guide pins)	Multimode 50 μm (OM2)	PC	3.0 mm	250 μm	Black
FUSEMPO-MM5L-3-M-6	MPO, Male (guide pins)	Multimode 50 μm 10Gig (OM3)	PC	3.0 mm	250 μm	Aqua
FUSEMPO-MM5L-3-F-6	MPO, Female (no guide pins)	Multimode 50 μm 10Gig (OM3)	PC	3.0 mm	250 μm	Aqua

*Pack of 6 pieces

Ordering Information – Accessories

DESCRIPTION	AFL NO.
TOOL KIT	
FuseConnect MPO Tool Kit	FUSEMPO-TL-KT
ACCESSORIES	
FuseConnect Ribbonize Tool	FUSE-RB-TL
FuseConnect Stripping Tool (3.0 mm, 2.8 mm, 2.0 mm, and 1.6 mm)	FUSE-ST-TL
FuseConnect MPO Assembly Tool	FUSE-AS-TL

