



Wiremold

Work Surface Solutions

Bring Technology Connections to the Point-of-Use



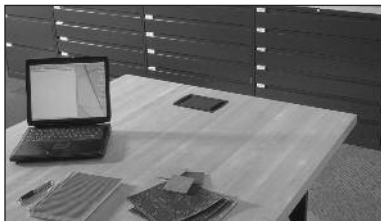
Wiremold® Work Surface Solutions bring technology closer to the user's work area. The routing of power, communication, and A/V connections is virtually invisible and allows easy accessibility to these services. Our wide range of Work Surface Portals offer flexibility to meet data/A/V connectivity, power configurations and décor needs. From desks and lab benches to conference tables or executive board rooms, Work Surface Portals make technology easily accessible to the user.



deQuorum Work Surface Portals are ideal for executive boardrooms.








FEATURES & BENEFITS

- **Range of solutions.** Wiremold Work Surface Solutions allow you to access power, data and/or A/V, above or below the work surface, from mobile, cord-ended or hard-wired solutions. Whatever your desktop or conference room service connection needs, we offer a wide range of solutions to meet them.
- **Variety of applications.** Commercial offices, desks and conference rooms, medical laboratories, even home offices can increase productivity by providing access to connections up to the work surface.
- **Aesthetics.** Cover options include style and choice of color to match any décor. Recessed units allow covers to be closed while in use to enable full use of work surface space.
- **Ease of installation.** From placing a cord-ended unit in an existing desk hole grommet, clamping on the edge of a table, or using the supplied template to create the cut out, Work Surface Portals are made easy to install so you can get back to business.
- **Configurable options.** Don't see what you're looking for? We have configurable units made to the size and capacity you need.
- **Wiremold Work Surface Solutions meet U.S. and Canadian safety standards.**



Clockwise from the left: Evolution™ Series Work Surface Portal, deQuorum™ Flip-Up Work Surface Portal, TableSource™ Work Surface Portal, Lab bench Work Surface Portal and deQuorum™ Recessed Work Surface Portal

Work Surface Portals Quick Selection Guide

WORK SURFACE PORTAL MODEL	SVC. LOCATION @ TABLE	CORD LENGTH	FIELD-WIRED WHIP LENGTH	COVER COLOR/MATERIAL	ELECTRICAL OUTLETS	DATA OPENINGS	A/V OPENINGS
 Evolution 6" Portals	Recessed 6" Diameter	12'	6'	Nickel, Bronze, Gray, Black, Brass Powder Coat	(2) 15A Duplex	(2) Ortronics® Cat 6 RJ45 jacks	(5) Extron® Electronics MAAP modules*
	Recessed 8" Diameter	12'	6'	Nickel, Bronze, Gray, Black, Brass Powder Coat	(2) 15A Duplex	(6) Ortronics® Cat 6 RJ45 jacks	(10) Extron® Electronics MAAP modules*
 deQuorum Recessed Portals	Recessed	12'	6'	Gray, Black	(2) 20A Duplexes Gasketed	Adapters for Ortronics® Series II, TracJack or Wiremold Open System	Cable Cord Keeper or Extron® Electronics MAAP modules – (6) single or (3) double*
 deQuorum Flip Up Portals	Above	12'	N/A	Black, Stainless	(1) 20A or 15A Duplex	Adapters for Ortronics® Series II, TracJack or Wiremold Open System	N/A
 TableSource Portals (Standard)	Above	12'	N/A	Clear Anodized Aluminum	(1) 15A Duplex	2 Openings with Adapters for Ortronics® Series II, TracJack or Wiremold Open System	N/A
 TableSource Portals (Configurable)	Above	2'-12'	Specify	Clear Anodized Aluminum	(1-4) 15A Duplexes Gasketed	1-4 Openings with Adapters for Ortronics® Series II, TracJack or Wiremold Open System	N/A
 Bench Top Portals (Configurable)	Above	N/A	N/A	Clear Anodized Aluminum	Fits (1-4) 15A Duplexes or Decorator Style Outlets	Consult Factory	Consult Factory
 Desktop Power Center Portal	Above	12'	N/A	Black with Magnesium Side Panels	(3) 15A Outlets with (2) USB Charging Outlets or (4) 15A Outlets	N/A	

* Extron® Electronics MAAP modules are sold separately.

Evolution™ Series Work Surface Portals

Introducing Evolution™ Series Work Surface Portals. Designed after our successful Evolution Poke Thru Devices, Evolution Work Surface Portals offer extra capacity and style in a conference or board room table. Evolution Series Work Surface Portals provide the space to mount devices below the table top and the aesthetics to match room decór. It offers seamless integration of electrical, voice, data, audio and video into workstation activations.

CODE REFERENCE

cETLus Listed:
Furniture Power Distribution Unit
Listed to US & Canadian Safety
Standards

EVOLUTION WORK SURFACE PORTALS COLOR OPTIONS

Evolution Work Surface Portal Covers are available in the following powder coated finishes: "BK" black, "GY" gray, "NK" nickel, "BS" brass, and "BZ" bronze.




Evolution™ Series Work Surface Portals provide surface-mounted access to power and communications services.

Evolution™ Series Work Surface Portals Part Number Configurator



Work Surface Series	Wiring:	Size: (Diameter)	Cover Style:	Cover Color:
WS	Field-Wired = F	6" [152mm] = 6	Surface/	Nickel = NK
	Cord-Ended = Blank	8" [203mm] = 8	Beveled = S	Bronze = BZ
			Flush = F	Gray = GY
				Black = BK
				Brass = BS

NOTE: Surface/Beveled and Flush cover styles can both be used on a variety of table surfaces and provide different aesthetic options. There are differences in the installation of each style of cover. Please refer to the installation instructions for these products for more detailed information. Evolution Work Surface Portals are not for use in floors.


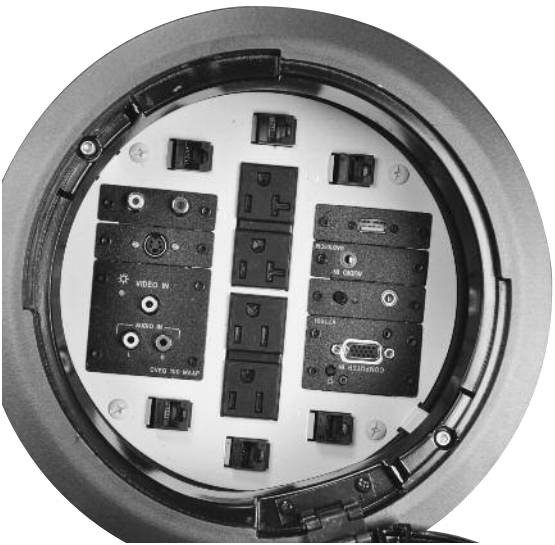
Evolution™ Series Work Surface Portals
provide recessed access to power and
communications services.



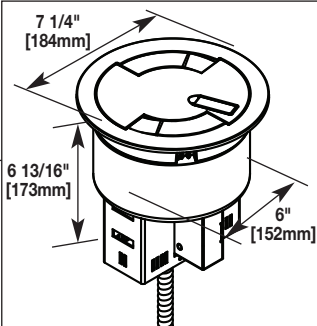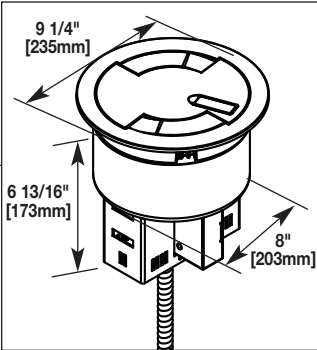Evolution™ Series Work Surface Portals Field-Wired Units Ordering Information

Catalog No./Item	Description/Specifications
WSF6FNK WSF6FBZ WSF6FGY WSF6FBK WSF6FBS	 <p>Field-Wired Work Surface Portal – Portal has flush 7 1/4" [184mm] cover with two (2) duplex receptacles and two (2) Ortronics® category 6 RJ45 jacks and can accept up to five (5) Extron® Electronics MAAP device plates. Units have 6' [1.8m] whip for field-wiring and are available with die-cast aluminum cover with durable powder coat finishes of nickel (WSF6FNK), bronze (WSF6FBZ), gray (WSF6FGY), black (WSF6FBK), or brass (WSF6FBS).</p>
WSF6SNK WSF6SBZ WSF6SGY WSF6SBK WSF6SBS	<p>Field-Wired Work Surface Portal – Portal has surface/beveled 7 1/4" [184mm] cover with two (2) duplex receptacles and two (2) Ortronics® category 6 RJ45 jacks and can accept up to five (5) Extron® Electronics MAAP device plates. Units have 6' [1.8m] whip for field-wiring and are available with die-cast aluminum cover with durable powder coat finishes of nickel (WSF6SNK), bronze (WSF6SBZ), gray (WSF6SGY), black (WSF6SBK), or brass (WSF6SBS).</p>
WSF8FNK WSF8FBZ WSF8FGY WSF8FBK WSF8FBS	 <p>Field-Wired Work Surface Portal – Portal has flush 9 1/4" [235mm] cover with two (2) duplex receptacles and six (6) Ortronics® category 6 RJ45 jacks and can accept up to ten (10) Extron® Electronics MAAP device plates. Units have 6' [1.8m] whip for field-wiring and are available with die-cast aluminum cover with durable powder coat finishes of nickel (WSF8FNK), bronze (WSF8FBZ), gray (WSF8FGY), black (WSF8FBK), or brass (WSF8FBS).</p>
WSF8SNK WSF8SBZ WSF8SGY WSF8SBK WSF8SBS	<p>Field-Wired Work Surface Portal – Portal has surface/beveled 9 1/4" [235mm] cover with two (2) duplex receptacles and six (6) Ortronics® category 6 RJ45 jacks and can accept up to ten (10) Extron® Electronics MAAP device plates. Units have 6' [1.8m] whip for field-wiring and are available with die-cast aluminum cover with durable powder coat finishes of nickel (WSF8SNK), bronze (WSF8SBZ), gray (WSF8SGY), black (WSF8SBK), or brass (WSF8SBS).</p>

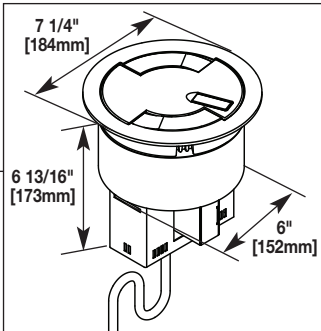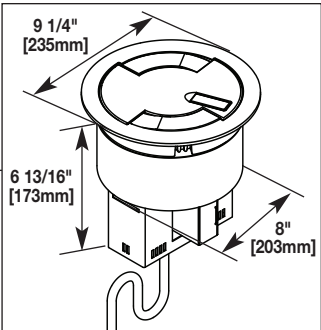Evolution™ Series Work Surface Portals Cord-Ended Units Ordering Information

Catalog No./Item	Description/Specifications
WS6FNK WS6FBZ WS6FGY WS6FBK	 <p>Cord-Ended Work Surface Portal – Portal has flush 7 1/4" [184mm] cover with two (2) duplex receptacles and two (2) Ortronics® category 6 RJ45 jacks and can accept up to five (5) Extron® Electronics MAAP device plates. Units are prewired with 12' [3.7m] cord with NEMA 5-15P plug and are available with die-cast aluminum cover with durable powder coat finishes of nickel (WS6FNK), bronze (WS6FBZ), gray (WS6FGY), black (WS6FBK), or brass (WS6FBS).</p>
WS6SNK WS6SBZ WS6SGY WS6SBK WS6SBS	<p>Cord-Ended Work Surface Portal – Portal has surface/beveled 7 1/4" [184mm] cover with two (2) duplex receptacles and two (2) Ortronics® category 6 RJ45 jacks and can accept up to five (5) Extron® Electronics MAAP device plates. Units are prewired with 12' [3.7m] cord with NEMA 5-15P plug and are available with die-cast aluminum cover with durable powder coat finishes of nickel (WS6SNK), bronze (WS6SBZ), gray (WS6SGY), black (WS6SBK), or brass (WS6SBS).</p>
WS8FNK WS8FBZ WS8FGY WS8FBK WS8FBS	 <p>Cord-Ended Work Surface Portal – Portal has flush 9 1/4" [235mm] cover with two (2) duplex receptacles and six (6) Ortronics® category 6 RJ45 jacks and can accept up to ten (10) Extron® Electronics MAAP device plates. Units are prewired with 12' [3.7m] cord with NEMA 5-15P plug and are available with die-cast aluminum cover with durable powder coat finishes of nickel (WS8FNK), bronze (WS8FBZ), gray (WS8FGY), black (WS8FBK), or brass (WS8FBS).</p>
WS8SNK WS8SBZ WS8SGY WS8SBK WS8SBS	<p>Cord-Ended Work Surface Portal – Portal has surface/beveled 9 1/4" [235mm] cover with two (2) duplex receptacles and six (6) Ortronics® category 6 RJ45 jacks and can accept up to ten (10) Extron® Electronics MAAP device plates. Units are prewired with 12' [3.7m] cord with NEMA 5-15P plug and are available with die-cast aluminum cover with durable powder coat finishes of nickel (WS8SNK), bronze (WS8SBZ), gray (WS8SGY), black (WS8SBK), or brass (WS8SBS).</p>

NOTE: Core hole size for 6" units is 6 1/4" [159mm]. Core hole size for 8" units is 8 1/4" [210mm]. Flanges for both the 6" and 8" units extend 3/4" [19.1mm] from body of unit. Evolution Work Surface Portals are not for use in floors.

deQuorum™ Recessed Work Surface Portals

deQuorum™ Recessed Work Surface Portals provide flexibility in décor, data and A/V connectivity options, and installation to meet specific functional and aesthetic needs. deQuorum™ Recessed Work Surface Portals feature covers that can be closed during use to make the portal unobtrusive.

CODE REFERENCE

cULus Listed Relocatable Power Tap:

File E66421 Guide XBY5

cULus Listed Multioutlet Assembly:

File E15191 Guide PVGT

Listed to US & Canadian Safety Standards

Meets Article 380 of NEC.



deQuorum Work Surface Portals provide flush surface-mounted access to power and communications services.

deQUORUM WORK SURFACE PORTALS COLOR OPTIONS

deQuorum Work Surface Portal Covers are available in the following finishes: Black and Gray

deQuorum Recessed Work Surface Portals Part Number Configurator

deQuorum Recessed Work Surface Portals



deQuorum Series:



Cover Style:



Cover Color:



Communications:



Top Style:

KC = Cord Ended

Flush = 1

Black = 0

Ortronics = RT

Recessed = 2

KF = Field Wired

Contoured = 4

Gray = 5


Wiremold = CM
Open System

Blank = 8


For information regarding communication inserts, go to:
www.legrand.us/wiremold

deQuorum Recessed Work Surface Portals Cover Options

FLUSH COVERS – Available finishes: Black or Gray.
Shown with flange.




Blank Top




Decorative Recess for
Table Laminate Insert

CONTOURED COVERS – Available finishes: Black or Gray.
Shown with flange.



Blank Top



Decorative Recess for
Table Laminate Insert

deQuorum Recessed Work Surface Portals In-Stock Configurations Ordering Information

CATALOG NUMBER	DESCRIPTION	Cord-Ended Unit
KC10CM2	Cord-ended with black, flush cover with decorative recess. Unit comes with two 20A gasketed prewired receptacles with a 12' [3.65m] 14/3 SJT black cord. Includes adapters for Wiremold CM Series Open System communications outlets. Communication modules sold separately.	
KC10RT8	Cord-ended with black, flush cover. Unit comes with two 20A gasketed prewired receptacles with a 12' [3.65m] 14/3 SJT black cord. Includes adapters for Ortronics® Series II and TracJack inserts. Communication modules sold separately.	
KC15RT8	Cord-ended with graphite, flush cover. Unit comes with two 20A gasketed prewired receptacles with a 12' [3.65m] 14/3 SJT black cord. Includes adapters for Ortronics® Series II and TracJack inserts. Communication modules sold separately.	
KF10CM8	Field-wired with black, flush cover. Unit comes with two 20A gasketed prewired receptacles with a 3/8" [9.5mm] diameter 6' [1.83m] flexible whip. Includes adapters for Wiremold CM Series Open System communications outlets. Communication modules sold separately.	
KF15RT2	Field-wired with graphite, flush cover with decorative recess. Unit comes with two 20A gasketed prewired receptacles with a 3/8" [9.5mm] diameter 6' [1.83m] flexible whip. Includes adapters for Ortronics® Series II and TracJack inserts. Communication modules sold separately.	

deQuorum Recessed Work Surface Portals Communication Plates Ordering Information

PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
KA102RT	Replacement Ortronics Communications Plate – Installed adapters will accommodate either Ortronics® Series II front-loading module system or the TracJack individual jack system. Includes black plate, three (3) Series II and three (3) TracJack adapters.	KA302	Cable Cord Keeper Plate – Holds cables captive for easy access when active jacks are not needed. Pull the cable out for use. Keeper bars provide seven adjustable openings for cables ranging from .150" to .350" [3.8mm to 8.9mm] in diameter.
KA104CM	Replacement Wiremold Open System Communications Plate – Installed adapters accept Wiremold CM Series modules to accommodate a wide range of communications outlets. Includes black plate and three (3) Wiremold Open System CM2 adapters.	KA305	Extron® Mini AAP Adapter Plate – Accepts six (6) single size MAAP or three (3) double size MAAP modules, or any combination. Includes necessary hardware.
KA700	Replacement 20A Gasketed Receptacle Plate – Plate has factory-installed receptacles ready to connect with installed unit. Can be used for field-installed or cord-ended units.	KA305-AAP	Extron® AAP Adapter Plate – Accepts three (3) AAP plates. Includes necessary hardware.
		KA301	Single-Gang Opening Plate – Use this plate to install any communication and/or multimedia connectivity that requires a single-gang wallplate. Includes necessary mounting hardware.

deQuorum™ Flip-Up Work Surface Portals

deQuorum™ Flip-Up Work Surface Portals provide flexibility in décor, datacom connectivity options, and installation to meet specific functional and aesthetic needs. Flip-Up Portals bring the modules above the work surface when in use for easy access.

CODE REFERENCE

cULus Listed Relocatable Power Tap:

File E66421 Guide XBY5

Listed to US & Canadian Safety Standards

Meets Article 380 of NEC.

deQUORUM WORK SURFACE PORTALS COLOR OPTIONS

deQuorum Flip-Up Work Surface Portal Covers are available in the following finishes: Black and Stainless.



deQuorum Flip-Up Work Surface Portals provide desktop access to power and communications services.

deQuorum Flip-Up Work Surface Portals Part Number Configurator

deQuorum Flip-Up Work Surface Portals

K P

deQuorum Series: **KP** = Flip Up Portal



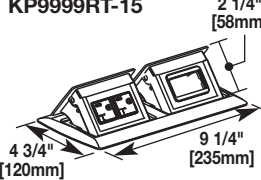
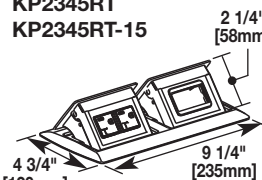


Unit Color: **Black** = 9999
Stainless = 2345

Communications: **Ortronics** = RT
Wiremold
Open System = CM

Receptacle: **20Amp** = Blank
15Amp = 15

For information regarding communication inserts, go to:
www.legrand.us/wiremold

deQuorum Flip-Up Work Surface Portals Ordering Information

PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
KP9999 KP9999-15	Single Flip-Up Unit – Black cover. KP9999 includes one 20A black gasketed duplex receptacle. KP9999-15 includes one 15A black gasketed duplex receptacle. Both units come with a 12' [3.66m] cord. 	KP2345 KP2345-15	Single Flip-Up Unit – Stainless finish cover. KP2345 includes one 20A black gasketed duplex receptacle. KP2345-15 includes one 15A gasketed duplex receptacle. Both units come with a 12' [3.66m] cord. 
KP9999RT KP9999RT-15	Dual Flip-Up Unit – Black cover. KP9999RT includes one 20A black gasketed duplex receptacle and one (1) Ortronics® Series II and one (1) Tracjack adapter to accommodate either Series II front-loading modules or TracJack individual jack. KP9999RT-15 includes one 15A black gasketed duplex receptacle. Both units come with a 12' [3.66m] cord. 	KP2345RT KP2345RT-15	Dual Flip-Up Unit – Stainless finish cover. KP2345RT includes one 20A black gasketed duplex receptacle and one 2A adapter to accommodate either Ortronics® Series II front-loading modules or TracJack individual jacks. KP2345RT-15 includes one 15A black gasketed duplex receptacle. Both units come with a 12' [3.66m] cord. 
KP9999CM KP9999CM-15	Dual Flip-Up Unit – Black cover. Wiremold CM Series Open System 2A modules for a wide range of communications outlets. KP9999CM-15 is the same as KP9999CM except with a 15A black gasketed duplex receptacle. Both units come with a 12' [3.66m] cord. 	KP2345CM KP2345CM-15	Dual Flip-Up Unit – Stainless finish cover. Wiremold CM Series Open System Communication 2A modules for a wide range of communications outlets. KP2345CM-15 includes one 15A black gasketed duplex receptacle. Both units come with a 12' [3.66m] cord. 

TableSource™ Work Surface Portals

TableSource™ Work Surface Portals provide flexibility in décor, datacom connectivity options, and installation to meet specific functional and aesthetic needs. TableSource Work Surface Portals are stand-alone units that can easily be added to any work area and require minimal and adaptable installation.

CODE REFERENCE

cULus Listed Relocatable Power Tap:

File E66421 Guide XBYS

cULus Listed Multioutlet Assembly:

File E15191 Guide PVGT

Listed to US & Canadian Safety Standards

Meets Article 380 of NEC.



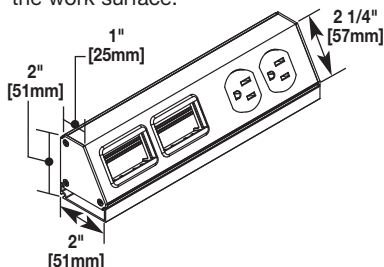
TableSource Work Surface Portals provide surface-mounted access to power and communications services.

TABLESOURCE WORK SURFACE PORTALS COLOR OPTIONS

Standard TableSource Work Surface Portals are available in a clear anodized aluminum finish. Other finishes are available for configurable units. Consult the configurator located on the next page.


TableSource Work Surface Portals Ordering Information

TableSource Portals listed in this chart are packaged with a mounting clip that attaches to the work surface.



CATALOG NUMBER	FINISH	UNIT LENGTH		15A DUPLEX	CORD LENGTH		COMM. OPENINGS	COMM. SYSTEM
		Inches	[mm]		Feet	[mm]		
TS2345AX1L1GYRT	Clear Anodized	6 23/32"	[170mm]	1	12'	[3.7m]	1	Ortronics TracJack & Series II
TS2345AX1L1GYCM	Clear Anodized	6 23/32"	[170mm]	1	12'	[3.7m]	1	Wiremold Open System CM2 communications outlets
TS2345AX1L2GYRT	Clear Anodized	9 3/32"	[231mm]	1	12'	[3.7m]	2	Ortronics TracJack & Series II
TS2345AX1L2GYCM	Clear Anodized	9 3/32"	[231mm]	1	12'	[3.7m]	2	Wiremold Open System CM2 communications outlets

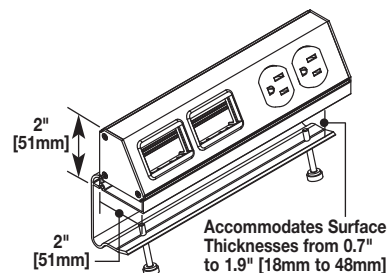TableSource Portals listed in this chart are packaged to include the backslash mounting bracket.



CATALOG NUMBER	FINISH	UNIT LENGTH		15A DUPLEX	CORD LENGTH		COMM. OPENINGS	COMM. SYSTEM
		Inches	[mm]		Feet	[mm]		
TS2345AM1L1GYRT	Clear Anodized	6 23/32"	[170mm]	1	12'	[3.7m]	1	Ortronics TracJack & Series II
TS2345AM1L1GYCM	Clear Anodized	6 23/32"	[170mm]	1	12'	[3.7m]	1	Wiremold Open System CM2 communications outlets
TS2345AM1L2GYRT	Clear Anodized	9 3/32"	[231mm]	1	12'	[3.7m]	2	Ortronics TracJack & Series II
TS2345AM1L2GYCM	Clear Anodized	9 3/32"	[231mm]	1	12'	[3.7m]	2	Wiremold Open System CM2 communications outlets

Lab Bench Work Surface Portals

Lab Bench Work Surface Portals provide access to multiple services in a variety of configurations to meet the demanding needs of laboratory activity. These field-wired units can be added to existing benches or designed into new lab construction.

CODE REFERENCE

cULus Listed Outlet Box:
File E2961 Guide QCIT
Listed to US & Canadian
Safety Standards

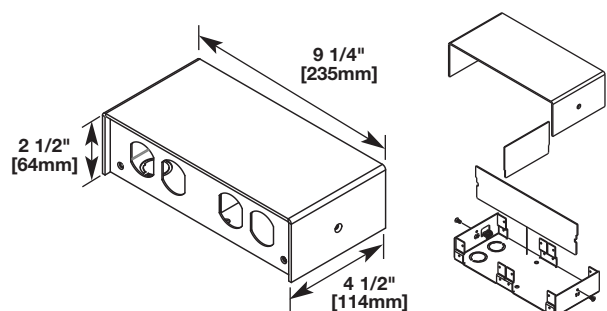
LAB BENCH WORK SURFACE PORTALS COLOR OPTIONS

Lab Bench Work Surface Portals are available in a clear anodized aluminum finish.



Lab Bench Work Surface Portals provide access to power and communications services.

Lab Bench Work Surface Portals Ordering Information



AL241S-HB Exploded
View showing Dividers

CATALOG NUMBER

AL241S-HB

DESCRIPTION










Lab Bench Work Surface Portals

Aluminum housing and base 9 1/4" x 4 1/2" x 2 1/2" [235mm x 114mm x 64mm] are provided with four (4) 1" trade size knockouts in base for hardwiring unit and two dividers which allow units to be divided on either the "X" or "Y" axis/plane. Accommodates a variety of power outlets (duplex or decorator), and supports Ortronics® and Wiremold Open System connectivity. Portals are field configurable by ordering the corresponding faceplates.

Faceplates for Lab Bench Work Surface Portals Ordering Information

PART NUMBER		LEFT OPENING	RIGHT OPENING
AL241FPB-B		Blank	Blank
AL241FPD-D		Duplex	Duplex
AL241FPDEC-DEC		Decorator	Decorator
AL241FPDEC-B		Decorator	Blank

Faceplates for Lab Bench Work Surface Portals Ordering Information (continued)

PART NUMBER		LEFT OPENING	RIGHT OPENING
AL241FP6A-D		Ortronics® or Wiremold Open System Communication 6A Module. Adapters included.	Duplex
AL241FPD-6A		Duplex	Ortronics® or Wiremold Open System Communication 6A Module. Adapters included.
AL241FP6A-6A		Ortronics® or Wiremold Open System Communication 6A Module. Adapters included.	Ortronics® or Wiremold Open System Communication 6A Module. Adapters included.
AL241FPB-6A		Blank	Ortronics® or Wiremold Open System Communication 6A Module. Adapters included.
AL241FP6A-B		Ortronics® or Wiremold Open System Communication 6A Module. Adapters included.	Blank
AL241FPB-D		Blank	Duplex
AL241FPD-B		Duplex	Blank
AL241FP6A-DEC		Ortronics® or Wiremold Open System Communication 6A Module. Adapters included.	Decorator
AL241FPDEC-6A		Decorator	Ortronics® or Wiremold Open System Communication 6A Module. Adapters included.

Desktop Power Center Work Surface Portals

Desktop Power Center Portals bring surge-protected power and USB charging outlets up to the work surface by utilizing existing cord drop openings in office desks and table tops or by mounting onto the edge of a desk or table top.

CODE REFERENCE

cETLus Listed
Furniture Power Distribution Box
Listed to US & Canadian
Safety Standards

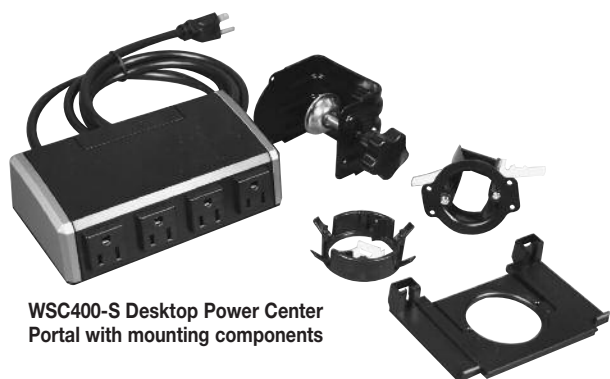
LAB BENCH WORK SURFACE PORTALS COLOR OPTIONS

Lab Bench Work Surface Portals are available
in black with magnesium side panels.



Desktop Power Center Work Surface Portals provide easy access to surge-protected power and USB services.

Desktop Power Center Work Surface Portals Ordering Information




WSC400-S Desktop Power Center
Portal with mounting components


CATALOG NUMBER	DESCRIPTION
WSC400-S	Work Surface Portal Has four (4) surge-protected 15Amp power outlets and a 12' [3.66m] cord. Units come with accessories for mounting into round cutouts in desk or edge mounting on desks or other work surfaces.
WSC320-S	Work Surface Portal Has three (3) surge-protected 15Amp power outlets, two USB charging outlets and a 12' [3.66m] cord. Units come with accessories for mounting into round cutouts in desk or edge mounting on desks or other work surfaces.

MOUNTING OPTIONS:

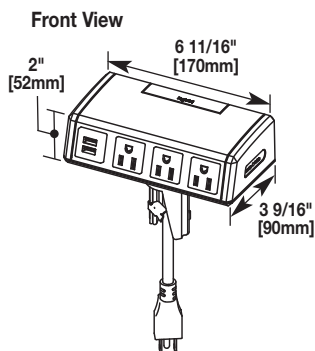
Installs through an existing
cord drop opening.



Back View




Installs on the edge
of a work surface.



Front View

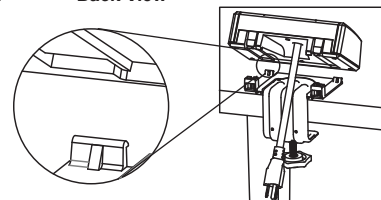Back View



Wiremold

WIREMOLD

U.S. and International:

60 Woodlawn Street • West Hartford, CT 06110
1-800-621-0049 • FAX 860-232-2062 • Outside U.S. 860-233-6251

Canada:

570 Applewood Crescent • Vaughan, Ontario L4K 4B4
1-800-723-5175 • FAX 905-738-9721

