

You are here: [Home](#) > [Products](#) > [Uninterruptible Power Supply \(UPS\)](#) > [Network and Server](#) > [Smart-UPS On-Line](#)





## APC Smart-UPS RT 6000VA Rack Tower 208V

**Part Number:** SURT6000RMXLT3U



[Technical Specifications](#) [Product Overview](#) [Documentation](#) [Software & Firmware](#) [Options](#) [Ratings and Reviews](#)

### Output

Output Power Capacity	4200 Watts / 6000 VA	
Max Configurable Power	4200 Watts / 6000 VA	
Nominal Output Voltage	208V	
Output Voltage Note	Configurable for 208 or 240 nominal output voltage	
Efficiency at Full Load	92.0%	
Output Voltage Distortion	Less than 3%	
Output Frequency (sync to mains)	50/60 Hz +/- 3 Hz user adjustable +/- 0.1	
Other Output Voltages	240	
Crest Factor	3 : 1	
Waveform Type	Sine wave	
Output Connections	(2) NEMA L6-20R	
	(2) NEMA L6-30R	
Bypass	Internal Bypass (Automatic and Manual)	

**Input**

Nominal Input Voltage	208V
Input Frequency	50/60 Hz +/- 5 Hz (auto sensing)
Input Connections	NEMA L6-30P



Cord Length 3.05 meters

Input voltage range for main operations 160 - 280V

Input voltage adjustable range for mains operation 100 - 280V

Other Input Voltages 240

**Batteries & Runtime**

Battery Type Maintenance-free sealed Lead-Acid battery with suspended electrolyte : leakproof

Included Battery Modules 2

Typical recharge time 2.50 hour(s)


Replacement Battery [RBC44](#)

RBC™ Quantity 1

Extended Run Options [APC Smart-UPS RT 6000VA Rack Tower 208V](#)

**Runtime Graph**

Curve	Part Number(s)
A	SURT6000RMXLT3U
B	SURT6000RMXLT3U + (1)SURT192RMXLBP3U
C	SURT6000RMXLT3U + (2)SURT192RMXLBP3U
D	SURT6000RMXLT3U + (3)SURT192RMXLBP3U
E	SURT6000RMXLT3U + (4)SURT192RMXLBP3U

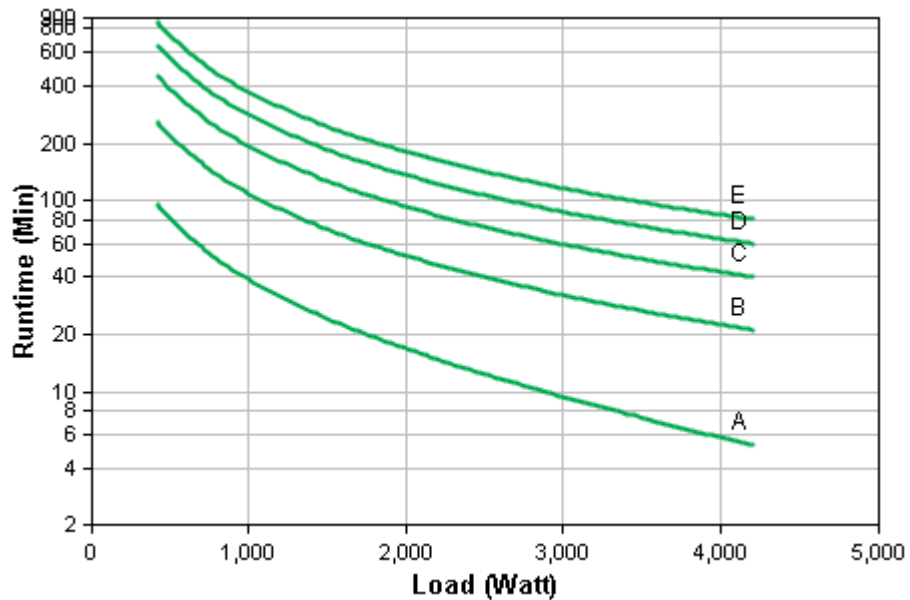

*Hover over the line on the graph above to view the runtime at any desired load*

Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

[View Enlarged Graph](#)

[View Runtime Chart](#)

#### Communications & Management

Interface Port(s)	DB-9 RS-232,RJ-45 10/100 Base-T,Smart-Slot
Pre-Installed SmartSlot™ Cards	<a href="#">AP9631</a>
Control panel	LED status display with load and battery bar-graphs and On Line : On Battery : Replace Battery : Overload and Bypass Indicators
Audible Alarm	Alarm when on battery : distinctive low battery alarm : overload continuous tone alarm
Emergency Power Off (EPO)	Yes

#### Surge Protection and Filtering

Surge energy rating	480 Joules
Filtering	Full time multi-pole noise filtering : 0.3% IEEE surge let-through : zero clamping response time : meets UL 1449

#### Physical

Maximum Height	130.00 mm
Maximum Width	432.00 mm
Maximum Depth	660.00 mm

Rack Height	3U
Net Weight	54.55 KG
Shipping Weight	63.64 KG
Shipping Height	347.00 mm
Shipping Width	603.00 mm
Shipping Depth	980.00 mm
Color	Black
Units per Pallet	6.00
<b>Environmental</b>	
Operating Environment	0 - 40 °C
Operating Relative Humidity	0 - 95%
Operating Elevation	0-3000 meters
Storage Temperature	-15 - 45 °C
Storage Relative Humidity	0 - 95%
Storage Elevation	0-15000 meters
Audible noise at 1 meter from surface of unit	55.00 dBA
Online Thermal Dissipation	1324.00 BTU/hr
<b>Conformance</b>	
Regulatory Approvals	CSA,FCC Part 15 Class A,OSHPD,UL 1778
Standard Warranty	2 years repair or replace
Environmental Compliance	RoHS 7b Exemption

\*Except where noted, all prices are Estimated Resale Price (ERP) - Without Tax/VAT. Pricing in other locations and sites may vary.

\*\*The time to recharge to 90% of full battery capacity following a discharge to shutdown using a load rated for 1/2 the full load rating of the UPS.