



KEYSTONE JACKS & MODULES

TechChoice® keystone jacks and modules feature an easy-to-follow universal wiring label and support standard termination using a 110-impact tool. The keystone footprint allows for the greatest flexibility in installation scheduling because its rear insertion into the faceplate allows the technician to complete the termination before, during and after the construction process.

Keystone Jacks

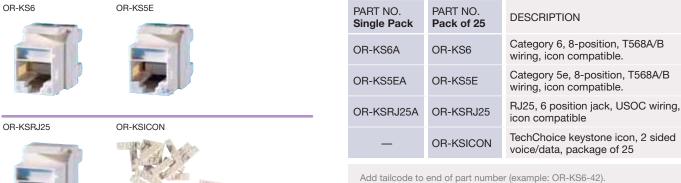

WM indicates Wiremold color match.



-00=Black; -13=Electrical ivory; -36=Blue; -42=Red; -88=White; -99=Wiremold® ivory; -43=Orange; -44=Yellow, -45=Green; -78=Gray. Standard color is fog white, requiring no tail code.

Fiber Keystone Modules





OR-KSLC

OR-KSMTRJ



PART NO.	DESCRIPTION
OR-KSST	1-ST simplex multimode, phosphor-bronze alignment sleeves, 180° exit. Fog white. Sold with dust cover
OR-KSSC	1-SC simplex multimode, phosphor-bronze alignment sleeves, 180° exit. Fog white. Sold with dust cover
OR-KSLC	1-LC (2 fibers) multimode, phosphor-bronze alignment sleeves, 180° exit. Fog white. Sold with dust cover
OR-KSMTRJ	1 MT-RJ (2 fibers) multimode, feed-through, 180° exit, flush. Fog white. Sold with dust cover

NOTE: For Wiremold Ivory, add tail code of -99 to end of part number (example OR-KSST-99). Sold individually.





DEFE