



by **Schneider** Electric

Basic Rack PDU


Overview

The American Power Conversion® Basic Rack PDU distributes power to devices in the rack.

Outlets. The Rack PDU has twenty-four NEMA 5-20 outlets.

Power cord. The 10-foot (3.05-meter) power cord terminates with a NEMA L5-30 connector.

AP7532

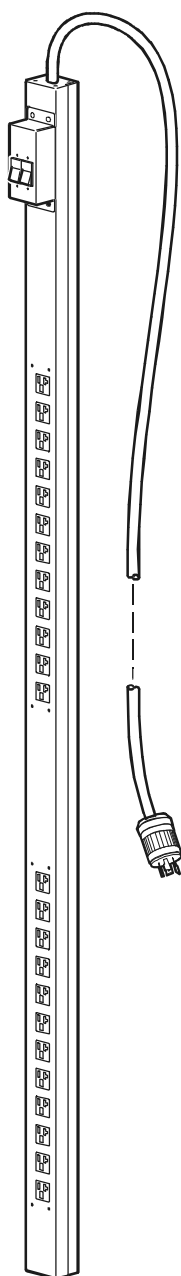



Specifications

Electrical

Input connector	NEMA L5-30 plug
Output connectors	24–NEMA 5-20 outlets
Nominal input voltage	120 VAC
Acceptable input voltage	$\pm 10\%$ of normal voltage
Input frequency	50/60 Hz

Physical

Size (H \times W \times D)	63.75 x 2.19 x 1.73 in (161.92 x 5.56 x 4.39 cm)
Shipping Dimensions (H \times W \times D)	84.00 x 6.00 x 5.00 in (213.36 x 15.24 x 12.7 cm)
Weight	12.25 lb (5.56 kg)
Shipping weight	14.25 lb (6.46 kg)

Environmental

Elevation (above MSL)	
Operating Storage	0–15,000 ft (0–4500 m) 0–50,000 ft (0–15 000 m)
Temperature Operating Storage	23 to 115° F (–5 to 45° C) –13 to 149° F (–25 to 65° C)
Humidity Operating Storage	5–95% RH non-condensing 5–95% RH non-condensing

Compliance

Safety verification	UL, cUL 60950
---------------------	---------------

Customer support and warranty information is available at the APC Web site, www.apc.com.

© 2008 American Power Conversion. All rights reserved. All APC trademarks are property of American Power Conversion. Other trademarks are property of their respective owners.



990-1893A
11/2008

