

ALA3800 Component Raceway Device Plates

Catalog No./Item	Description/Specifications		Catalog No./Item	Description/Specifications	
ALA-BL	Blank Cover Plate – To cover a 12" [305mm] section of raceway.		ALA-MABRT	Ortronics® Cover Plate – For six Ortronics TracJack® or three Series II data/communications inserts. Both bezels included.	ORT P&S OPEN
ALA-DR	Duplex Receptacle Cover Plate – For mounting standard duplex devices to the cover. • Accepts 106 Frame.	ORT P&S OPEN	ALA-SG	Cover Plate with 1 3/4" x 2 3/4" [44mm x 70mm] Holecut – For installing Activate connectivity inserts with a single-gang faceplate or angled single-gang faceplate (not included).	ORT P&S OPEN
ALA-E	Single Receptacle Cover Plate – 1.40" [36mm] diameter. For straight blade and locking single receptacles.		ALA-2A	Activate 2A Cover Plate – For installing a single 2A Activate insert. Includes bezel.	ORT P&S OPEN
ALA-F	Single Receptacle Cover Plate – 1.59" [40mm] diameter. For straight blade and locking single receptacles.		ALA-ABRT	Ortronics® Cover Plate – For two Ortronics TracJack® or one Series II data/communications insert. Both bezels included.	ORT P&S OPEN
ALA-G	GFCI/Surge/Decor Cover Plate – For GFCI or Sentrex® Surge protection receptacles.		ALA-Z	3/4" [19.1mm] Grommet/Mousehole Cover Plate – Facilitates the exit of voice or data communication cabling. Grommet furnished.	
ALA-J	Single Receptacle Cover Plate – 2.13" [54mm] diameter. For straight blade or locking single receptacles.		ALA-LPB3S2	Ortronics® Low Profile Bezel Cover Plate – Accepts Ortronics datacom inserts. • 3-Series II Devices • Low Profile Bezel included	ORT P&S OPEN
ALA-N	Toggle Switch Cover Plate – For toggle switch.				
ALA-LPB	Activate LPB Cover Plate – For installing Activate connectivity inserts. Includes cover and Activate low profile bezel with station label openings. (6A size opening)	ORT P&S OPEN			
ALA-MAB	Activate MAB Cover Plate – For installing Activate connectivity inserts. Provides a flush installation. Includes bezel.	ORT P&S OPEN			

NOTE: All device plates are 12" [305mm] in length.

A full range of fittings are available for fast and easy installations.



WIREMOLD



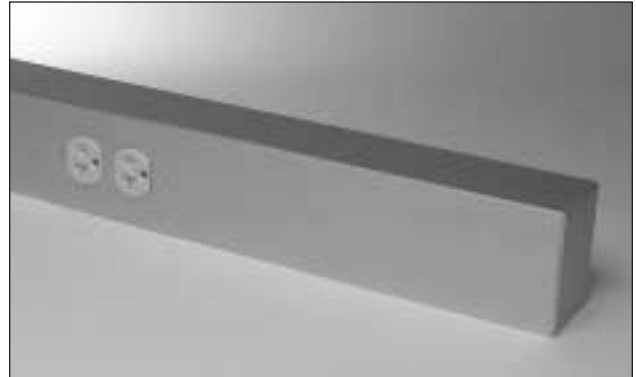
ALA3800 Aluminum Raceway

Isoduct™ Architectural Aluminum Single Channel Raceway

Available Factory Prewired.


















The Wiremold ALA3800 Aluminum Raceway System meets the demands of commercial spaces, providing a handsome and effective method of directing power or communications services where required. The low-profile surface mounted raceway installs easily. The two-piece raceway means wiring is always accessible and changes are easily accomplished.



Features & Benefits


- **Common covers.** Shares cover plates with the ALA4800 Series.
- **Datacom connectivity options.** Accepts industry standard and proprietary devices from a wide range of manufacturers to provide a seamless and aesthetically pleasing interface for voice, data, audio, and video applications at the point of use.
- **Cable bend radius control inserts.** Provides a 2" [51mm] bend radius for Fiber Optic/Cat 5 installations.
- **Satin anodized finish.** Has an aesthetically pleasing appearance that resists rust, corrosion, and fading.
- **Removable cover and pre-cut device plates.** Provides easy access to wiring and maximum flexibility for adding or relocating outlets and circuits.
- **Broad range of standard fittings.** Accommodates many site situations from internal and external elbows to flat tees.
- **Accommodates standard electrical wiring devices.** Accommodates most installations, including single outlets, duplex outlets, NEMA-locking outlets, GFCI outlets, and our Sentrex® surge protected outlets.
- **Custom prewired options available.**
 - Dry powder coat paint.
 - Custom device openings.
- **Available prewired.** Manufactured to specified job site lengths, raceway comes ready to install. Jobs can be packaged by room, area, floor, or building and shipped per your job site requirements. See page 5 for options.
- **Electrical device identification for prewired raceway.** See page 6 for labeling options. Eliminates guesswork or time-consuming tracing of circuits and speeds additions and renovations.
- **UL and cUL listed multioutlet assemblies.** File E68073 Guide PVGT. Fittings: File E121188 Guide RJPR. Meets Article 380 of NEC and meets Section 12-3032 of CEC.
- **UL and cUL Listed component raceway.** File E73943 Guide RJBT. Fittings: File E74243, Guide RJPR. Meets Article 386 of NEC and meets Section 12-1600 of CEC.
- **UL5 and ADA compliant.** Raceway and fittings meet UL5 specifications and can be installed in conformance with ADA requirements.

ALA4800 Component Raceway Device Plates

Catalog No./Item	Description/Specifications	Catalog No./Item	Description/Specifications
ALA-BL	Blank Cover Plate – To cover a 12" [305mm] section of raceway. 	ALA-MABRT	Ortronics® Cover Plate – For six Ortronics TracJack® or three Series II data/communications inserts. Both bezels included.  NEW! ORT P&S OPEN
ALA-DR	Duplex Receptacle Cover Plate – For mounting standard duplex devices to the cover. • Accepts 106 Frame.  ORT P&S OPEN	ALA-SG	Cover Plate with 1 3/4" x 2 3/4" [44mm x 70mm] Holecut – For installing Activate connectivity inserts with a single-gang faceplate or angled single-gang faceplate (not included).  ORT P&S OPEN
ALA-E	Single Receptacle Cover Plate – 1.40" [36mm] diameter. For straight blade and locking single receptacles. 	ALA-2A	Activate 2A Cover Plate – For installing a single 2A Activate insert.  ORT P&S OPEN
ALA-F	Single Receptacle Cover Plate – 1.59" [40mm] diameter. For straight blade and locking single receptacles. 	ALA-ABRT	Ortronics® Cover Plate – For two Ortronics TracJack® or one Series II data/communications insert. Both bezels included.  NEW! ORT P&S OPEN
ALA-G	GFCI/Surge/Decor Cover Plate – For GFCI or Sentrex® Surge protection receptacles. 	ALA-Z	3/4" [19.1mm] Grommet/Mousehole Cover Plate – Facilitates the exit of voice or data communication cabling. Grommet furnished. 
ALA-J	Single Receptacle Cover Plate – 2.13" [54mm] diameter. For straight blade or locking single receptacles. 	ALA-LPB3S2	Ortronics® Low Profile Bezel Cover Plate – Accepts Ortronics datacom inserts. • 3-Series II Devices • Low Profile Bezel included  NEW! ORT P&S OPEN
ALA-N	Toggle Switch Cover Plate – For toggle switch. 	ALA-LPB	Activate LPB Cover Plate – For installing Activate connectivity inserts. Includes cover and Activate low profile bezel with station label openings. (6A size opening)  ORT P&S OPEN
ALA-MAB	Activate MAB Cover Plate – For installing Activate connectivity inserts. Provides a flush installation. Includes bezel.  ORT P&S OPEN		

NOTE: All device plates are 12" [305mm] in length.

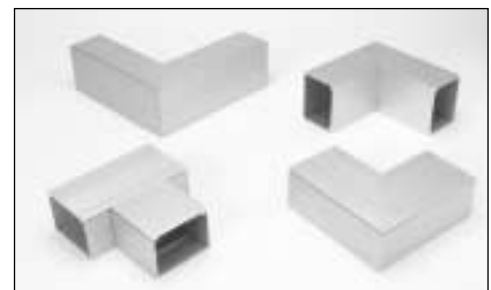A full range of fittings are available for fast and easy installations.



Isoduct™ Architectural Aluminum Twin Cover Raceway

Available Factory Prewired.



The Wiremold ALA4800 Aluminum Raceway System meets the demands of commercial spaces, providing a handsome and effective method of consolidating power and communications cabling. In laboratories, healthcare facilities and upscale office locations, the two channel, two cover aluminum raceway directs power and communication cabling services where required and provides access to one channel at a time.



Features & Benefits

- **Common Covers.** Shares cover plates with the ALA3800 Series.
- **Datacom connectivity options.** Accepts industry standard and proprietary devices from a wide range of manufacturers to provide a seamless and aesthetically pleasing interface for voice, data, audio, and video applications at the point of use.
- **FiberReady 2" bend radius inserts.** Provides a 2" [51mm] bend radius for Fiber Optic / UTP installations.
- **Satin anodized finish.** Has an aesthetically pleasing appearance that resists rust, corrosion and fading.
- **Dual channel and Twin Snap™ cover.** Allows access to one service at a time.
- **Removable cover and precut device plates.** Provides easy access to wiring and maximum flexibility for adding or relocating outlets and circuits.
- **Broad range of standard fittings.** Accommodates many site situations from internal and external elbows to flat tees.
- **Accommodates standard electrical wiring devices.** Accommodates most installations including single outlets, duplex outlets, NEMA-Locking outlets, GFCI outlets, and Sentrex® surge protected outlets.
- **Available prewired.** Manufactured to specified job site lengths, raceway comes ready to install (includes installation details). Jobs can be packaged by room, area, floor, or building and shipped per your job site requirements. See page 5 for options.
- **Electrical device identification for prewired raceway.** See page 6 for labeling options. Eliminates guesswork or time-consuming tracing of circuits and speeds additions and renovations.
- **Custom prewired options available.**
 - Dry powder coat paint.
 - Custom device openings.
- **UL and cUL Listed multioutlet assemblies.** File E68073 Guide PVGT. Fittings: File E121188 Guide RJPR. Meets Article 380 of NEC and meets Section 12-3032 of CEC.
- **UL and cUL Listed component raceway.** File E73943 Guide RJBT. Fittings: File E74243, Guide RJPR. Meets Article 386 of NEC and meets Section 12-1600 of CEC.
- **UL5 and ADA compliant.** Raceway and fittings meet UL5 specifications and can be installed in conformance with ADA requirements.