


Product Datasheet

[Catalog Home](#)[Home Page](#)[Search](#)

HBL7506C -- Twist-Lock Connector Body

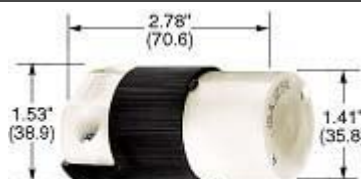

HBL7506C

2P2W, 15A 125V, L1-15R, Black & White Nylon

Product Specifications

Product Type

Twist-Lock
Devices

Product Item

Connector Body

Wiring Scheme

2-Pole, 2-Wire Non-Grounding

Amperage

15A

Voltage

125V AC

NEMA Configuration

L1-15P

Item Style

Standard

Device Color

Black/White

Cord Dia.

.230"-.720" (5.8-18.3)

Terminal Retainer
Material

Clear polycarbonate

Housing Material

Black nylon

Cord Clamp Material

Natural (white) nylon

Terminal Clamp
Material

.062" cold rolled steel-nickel-plated

Terminal Screw
Material

#8-32 Brass (white finish on neutral screw when used)

Cord Clamp Screw
Material

Steel - zinc plated Multi-drive

Body Holding Screw
Material

Steel, zinc plated Multi-drive

Body Contact Carrier
Material

Natural White Nylon

Contact Spring
Material

Brass

Spring Binding Plate Material	Brass
Ratings	Molded In or Stamped On
Catalog No	Permanently ink marked on product
Dielectric Voltage Withstand	2,000V minimum
Current Interrupting	Certified for current interrupting at full rated current
Temperature Rise	Max 30C temperature rise at full rated current after 50 cycles of overload at 150% of rated current at a power factor of .75.
Cord Accommodation	Round portable service cords of diameters commensurate with the device rating as defined in UL Standard 62, CSA C22.2 No. 49.
Terminal Accommodation	15A #14 AWG
Terminal Identification	Terminals identified in accordance with UL 498 (X, Y, Z, White, Green)
Flammability	UL 94 VO for Receptacles and Inlets. HB or better for Plugs and Connectors.
Operating Temperatures	Maximum Continuous 75 C Minimum -40 C (w/o impact)
Moisture Resistance	IP20
Listings	UL
UPC Number	783585177908
Weight in LBs	0.15
Link to Drawing Library	Click here for Library
Link to PDF Catalog	Click here for Catalog

