


Opt-X® Fiber Adapter Plates — Precision Molded

APPLICATION

Leviton Opt-X fiber adapter plates are used in conjunction with Opt-X panels or enclosures (rack- or wall-mount) to provide a means to connect backbone to backbone or backbone to horizontal fiber cabling. The Opt-X fiber adapter plates are offered in LC, SC, and ST versions.

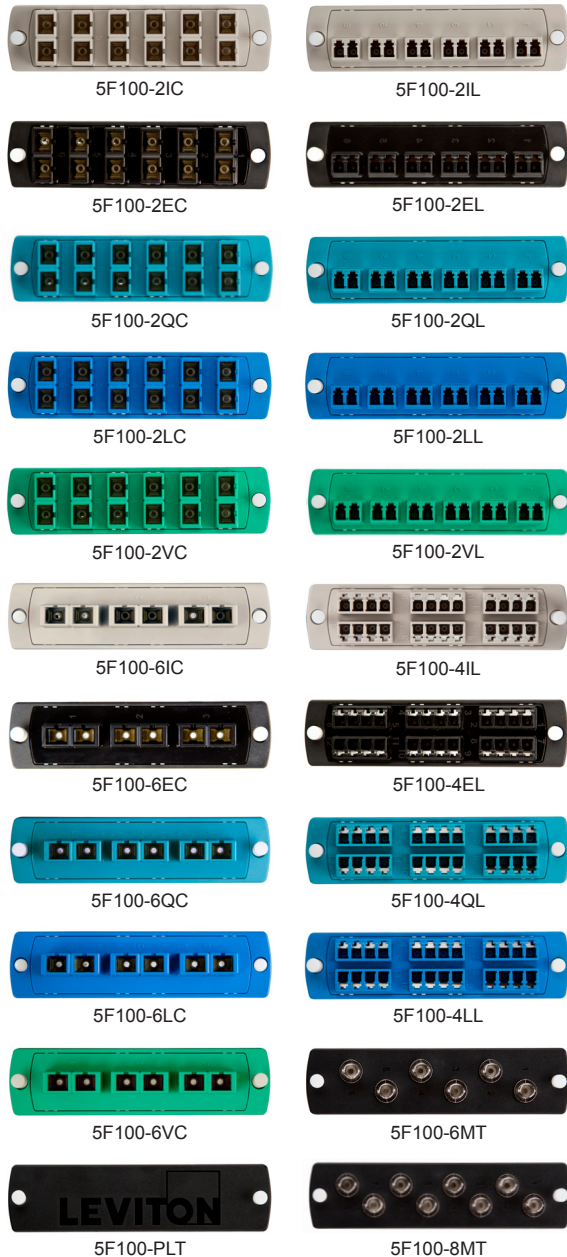

SPECIFICATION

The Opt-X adapter plate shall be modular and functional for use in an Opt-X panel or enclosure (rack- or wall-mount). The adapter plate shall be offered in LC, SC, and ST styles in 6, 12, or 24 fiber configurations. The adapter plate shall be compliant to ANSI/TIA-568-C.3 (for performance) and respective ANSI/TIA-604-X (for intermateability) standards. Adapter plates shall use zirconia ceramic sleeves and be offered in standard fiber type colors pursuant to ANSI/TIA-568-C.3 standards. The adapter and plate shall be integrated to eliminate “rattle” and loose fit. Adapter plates shall be made in the United States of America.

FEATURES

- Integrated LC and SC plates (two pieces) eliminates rattling and loose fit
- Adapter plates use zirconia ceramic sleeves for optimal performance in 1 Gbps and higher transmission speeds
- LC and SC plates offered in standard fiber type colors
- Adapter plates offered in LC, SC, ST, and blank styles
- Captive push-lock pins allow for quick tool-less installation
- Compatible with all Opt-X panels and enclosures (rack- or wall-mount)

DESIGN CONSIDERATIONS

- Arrange adapter plates within panel or enclosure to allow for future growth
- Colored plate or fiber adapters will identify fiber type used
- Visible sequential numbering to identify ports (for Tx & Rv)
- 4RU rack-mount enclosure accommodates up to 15 adapter plates for highest density per RU
- Zirconia ceramic sleeve typically used on laser optimized multimode and single-mode applications (OM3, OM4, OS2)

STANDARDS COMPLIANCE

- Meets ANSI/TIA-568-C.3 for performance requirements
- Meets ANSI/TIA-604-2B (ST), -3B (SC), -10B (LC) for connector intermateability

PHYSICAL SPECIFICATIONS

Materials: Adapter plate: constructed of engineered polymer, various pantone colors

COUNTRY OF ORIGIN

USA

WARRANTY INFORMATION

For a copy of Leviton product warranties, visit www.leviton.com/warranty.

5F100-xxx (precision molded)

Leviton Network Solutions 2222 - 222nd St. SE Bothell, WA 98021-4416 tel 1-800-824-3005 tel +1-425-486-2222 appeng@leviton.com www.leviton.com	Asia / Pacific T +1.631.812.6228 E infoasean@leviton.com	Canada T +1.514.954.1840 E pcservice@leviton.com	Caribbean T +1.954.593.1896 E infocaribbean@leviton.com	China T +852.2774.9876 E infochina@leviton.com	Colombia T +57.1.743.6045 E infocolombia@leviton.com
	Europe T +33.6.8869.1380 E infoeurope@leviton.com	India / SAARC T +91.80.4322.5678 E infoindia@leviton.com	Mexico T +52.55.5082.1040 E lsamarketing@leviton.com	Middle East & Africa T +971.4.886.4722 E lmeinfo@leviton.com	South Korea T +82.2.3273.9963 E infokorea@leviton.com

PRODUCT SPECIFICATIONS
5F100-xxx (precision molded)




ELECTRONIC FILES


For CAD files, typical specs, or dimensional line art (.DXF, .DWG, Visio), visit www.leviton.com.

PART NUMBERS


Description	Part No.
Plate (beige), 62.5 µm MM (OM1), Duplex LC, 12-fiber, zirconia ceramic sleeve	5F100-2IL
Plate (black), 50 µm MM (OM2), Duplex LC, 12-fiber, zirconia ceramic sleeve	5F100-2EL
Plate (aqua), 50 µm LOMM (OM3 & OM4), Duplex LC, 12-fiber, zirconia ceramic sleeve	5F100-2QL
Plate (blue), SM (OS1 & OS2), Duplex LC, 12-fiber, zirconia ceramic sleeve	5F100-2LL
Plate (green), SM/APC (OS1 & OS2), Duplex LC, 12-fiber, zirconia ceramic sleeve	5F100-2VL
Plate (beige), 62.5 µm MM (OM1), Quad LC, 24-fiber, zirconia ceramic sleeve	5F100-4IL
Plate (black), 50 µm MM (OM2), Quad LC, 24-fiber, zirconia ceramic sleeve	5F100-4EL
Plate (aqua), 50 µm LOMM (OM3 & OM4), Quad LC, 24-fiber, zirconia ceramic sleeve	5F100-4QL
Plate (blue), SM (OS1 & OS2), Quad LC, 24-fiber, zirconia ceramic sleeve	5F100-4LL
Plates (beige), 62.5 µm MM (OM1), Duplex SC, 6-fiber, zirconia ceramic sleeve	5F100-6IC
Plates (black), 50 µm MM (OM2), Duplex SC, 6-fiber, zirconia ceramic sleeve	5F100-6EC
Plates (aqua), 50 µm MM (OM3 & OM4), Duplex SC, 6-fiber, zirconia ceramic sleeve	5F100-6QC
Plates (blue), SM (OS1 & OS2), Duplex SC, 6-fiber, zirconia ceramic sleeve	5F100-6LC
Plates (green), SM/APC (OS1 & OS2), Duplex SC, 6-fiber, zirconia ceramic sleeve	5F100-6VC
Plate (beige), 62.5 µm MM (OM1), Duplex SC, 12-fiber, zirconia ceramic sleeve	5F100-2IC
Plate (black), 50 µm MM (OM2), Duplex SC, 12-fiber, zirconia ceramic sleeve	5F100-2EC
Plate (aqua), 50 µm LOMM (OM3 & OM4), Duplex SC, 12-fiber, zirconia ceramic sleeve	5F100-2QC
Plate (blue), SM (OS1 & OS2), Duplex SC, 12-fiber, zirconia ceramic sleeve	5F100-2LC
Plate (green), SM/APC (OS1 & OS2), Duplex SC, 12-fiber, zirconia ceramic sleeve	5F100-2VC
Plate (black), ST MM/SM, 6-fiber, zirconia ceramic sleeve	5F100-6MT
Plate (black), ST MM/SM, 8-fiber, zirconia ceramic sleeve	5F100-8MT
Plate (black), Blank	5F100-PLT

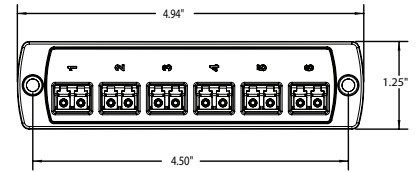


LC style

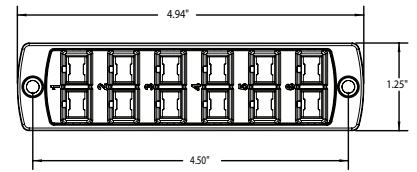

SC style

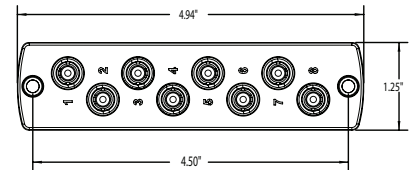

ST style

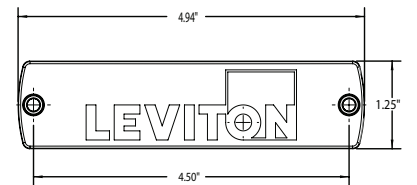

blank style

5F100-xxx (precision molded)

