

QuickPort® Field-Configurable Connector Housings Multi-Port Wallplates

QuickPort® Field-Configurable Connector Housings

APPLICATION

Field-configurable wallplates accept QuickPort® snap-in modules to support multimedia applications with 1, 2, 3, 4 or 6 ports. Use where a one-piece, single-gang, economical flush-mount housing is desired.

STANDARDS COMPLIANCE

Meets or exceeds all applicable standards: UL Listed; CSA certified; complies with TIA/EIA-568-B; and meets FCC Part 68.

PHYSICAL SPECIFICATIONS

Capacity: Available in 1-, 2-, 3-, 4- or 6-port versions.
Materials: High-impact, fire-retardant plastic rated UL 94V-0.
Dimensions: 4.5"H x 2.75"W x .925"D (in-wall depth 0.925 w/ connectors installed)

DESIGN CONSIDERATIONS

- Fits single-gang backboxes, or four-square boxes with appropriate user-provided reducer.
- Put blanks (PN# 41084-B*B) in unused ports for future expansion.
- Specify port identification method (colored modules, designation labels, and custom silkscreening available). To ID ports, use different colored connectors for each application (full selection of TIA/EIA-606 compatible colors—13 available), or Leviton's pre-printed Port Designation Labels. (PN# 41080-LXB)

UNIQUE FEATURES

- Color-matched wallplate screws
- Five color choices
- Fits within minimum rectangular NEMA openings
- Compatible with all individual QuickPort® modules
- Individual-port configurability allows specification flexibility
- Narrow module width allows high port density in a small area

WARRANTY INFORMATION

- One-year limited product warranty and 15-year performance guarantee are standard.
- Product and performance warranties are extended to a Lifetime as part of Leviton's Certified Cabling System.

See ELECTRONIC FILES for CAD files (.DXF, .DWG, MS-DOS.EPS) on disk



See ELECTRONIC FILES for CAD files (.DXF, .DWG, MS-DOS.EPS) on disk.

TYPICAL SPECIFICATION

The wallplate housing shall be a one-piece, single-gang flush mount style that fits standard NEMA openings, or four-square boxes with reducer. It should provide 1, 2, 3, 4 or 6 ports. Must be able to accept all Leviton QuickPort® modules. It must be made of high-impact, fire-retardant plastic rated UL 94V-0, and be UL Listed, CSA certified and compliant with FCC Part 68 and TIA/EIA-568-B specifications. Colors, port counts and configurations to be specified per schedule on plan. Wallplate screws must match wallplate color. The manufacturer shall provide a one-year limited product warranty and 15 year product performance guarantee. The manufacturer shall provide a lifetime warranty against defects in material and workmanship, and an application guarantee when installed as part of a certified system.



For Applications Engineering Support – Call 1-425-485-4288; in USA call 1-800-722-2082
Spec sheets and updates are also available at www.levitonvoicedata.com.




QuickPort® Field-Configurable Connector Housings


Part Number
41080-xxP

DIMENSIONAL LINE ART

See ELECTRONIC FILES for CAD images
(.DXF, .DWG, MS-DOS.EPS)

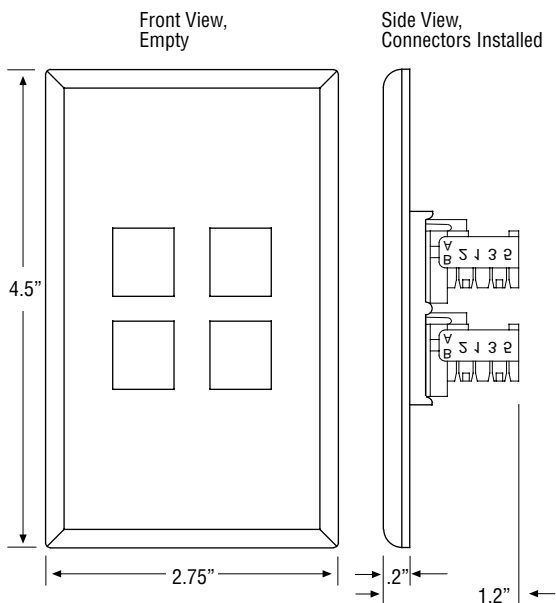

Note: QuickPort® snap-in modules (connectors and bulkhead connectors and couplings) are sold separately. Please refer to the QuickPort module spec sheets for ordering information.

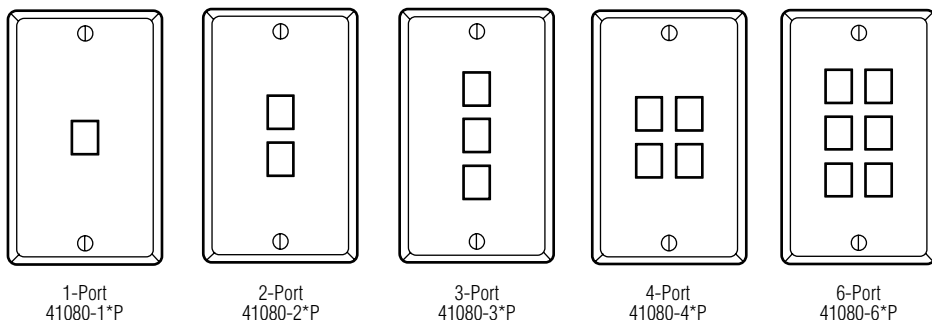

Part Number

QuickPort® Wallplates	Part No.
1-Port wallplate	41080-1*P
2-Port wallplate	41080-2*P
3-Port wallplate	41080-3*P
4-Port wallplate	41080-4*P
6-Port wallplate	41080-6*P

* = color: Ivory (I), White (W), Grey (G), Black (E), Almond (A)
Special order color: Brown (B)



For Applications Engineering Support – Call 1-425-485-4288; in USA call 1-800-722-2082.
Spec sheets and updates are also available at www.levitonvoicedata.com.



2222 – 222nd St. SE • Bothell, WA 98021 USA • Tel: 1-800-722-2082 / 1-425-485-4288 • Fax: 1-425-483-5270 • Int'l Fax: 1-425-485-9170 • GSA# GS-35F-4785G