

NEW CATALOG ITEM

ORGANIZING. STORING. SECURING.



Sold by:



FEATURES:

- Provides a horizontal pathway for patch cords and multimedia applications using coax, copper and fiber optic cables.
- Extra-wide and contoured cable guides separate and organize patch cords for quick and easy Moves, Adds and Changes (MAC's).
- The cable guides are offset 1.3" or 2.6" from the front of the rack to ensure proper bending radii of patch cables—even hooded patch cables.
- Hinged snap-on cover opens 180° in up or down position and can be quickly removed for easy cable access.
- Cover attaches to cable manager with "snap on" clips at four points for sturdy, easy installation and removal.
- Cover and panel have a black powder coat wrinkle finish to reduce fingerprints, scratches and smudges.

UNIVERSAL HORIZONTAL CABLE MANAGER

The new CPI Universal Horizontal Cable Management System provides an attractive and highly functional horizontal pathway for patch cords and multimedia applications using coax, copper and fiber optic cables. When used above or below patch panels, the extra-wide, contoured plastic cable guides of the Universal Cable Manager create a pathway for neatly fanning the patch cords from the patch panels and routing them to the sides of the rack. Patch cords may also be routed to the back of the rack through the flanged pass-through slot. In multimedia applications, the Universal Cable Manager provides horizontal cable routing in or between racks. After routing the cables or cords, simply snap-on the hinged cover for a clean, professional appearance. The cover opens 180° in up or down position so that cables can be accessed without removing the cover (cover may be easily removed when required). Use in conjunction with the CPI Patch Panel Wire Management Bar (PN 12176-X01) and any of CPI's Vertical Cabling Sections (11374, 11729, 11730, 12096 series Vertical Cabling Sections or 30091, 30092, 30093*, 30094*, 30095*, 30096* series MCS™ Master Cabling Sections) for clean, organized cable management.



Manage your horizontal cabling needs with the CPI Universal Horizontal Cable Manager—an attractive, highly functional solution in CPI Style. Please contact your authorized CPI Distributor or CPI Customer Service Representative for more information, or go to www.chatsworth.com.

See reverse for dimensions and additional information.

An Employee Owned Corporation



**CHATSWORTH
PRODUCTS, INC.**


Chatsworth, CA Operations
818-882-8595 • 818-718-0473 FAX
Georgetown, TX Operations
512-863-7800 • 512-869-1374 FAX
New Bern, NC Operations
252-514-2779 • 252-514-2977 FAX
New Castle, IN Operations
765-599-9000 • 765-593-0223 FAX
Email
techsupport@chatsworth.com
Website
www.chatsworth.com

Universal Horizontal Cable Manager		
Part Number	Description	Shipping Weight
30130-719	2 RMU, 19"W, Black	3 lb
30130-723	2 RMU, 23"W, Black	4 lb
30131-719	3 RMU, 19"W, Black	4 lb
30131-723	3 RMU, 23"W, Black	5 lb
30330-719*	Deep Panel, 2 RMU, 19"W, Black	4 lb
30330-723*	Deep Panel, 2 RMU, 23"W, Black	5 lb
30331-719*	Deep Panel, 3 RMU, 19"W, Black	5 lb
30331-723*	Deep Panel, 3 RMU, 23"W, Black	6 lb

*Note: Deep Panel is used when Double-Sided MCS Master Cabling Sections are center mounted on 3"D Racks

UNIVERSAL HORIZONTAL CABLE MANAGER

Dimensions:

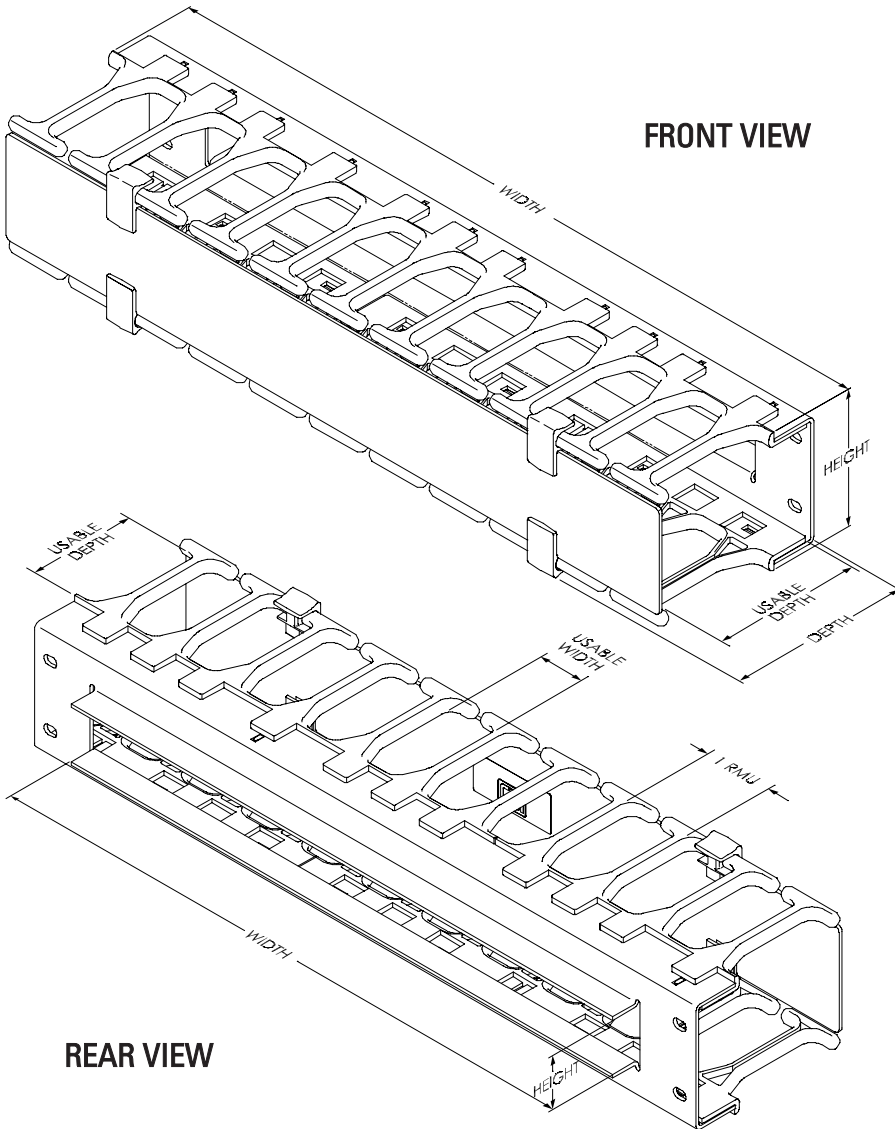

2 RMU CABLE MANAGER (30130 SERIES)

Dimension	19"W	23"W
Overall Width	19.25"	23.00"
Overall Height	3.47"	3.47"
Overall Depth	5.14"	5.14"
Usable Depth	4.20"	4.20"

Rear Cable Pass Through

Cable Opening Width	16.00"	19.00"
Cable Opening Height	1.36"	1.36"

Cable Guides

Spacing (from center)	1 RMU	1 RMU
Usable Width	1.37"	1.37"
Usable Depth	2.77"	2.77"

3 RMU CABLE MANAGER (30131 SERIES)

Dimension	19"W	23"W
Overall Width	19.25"	23.00"
Overall Height	5.22"	5.22"
Overall Depth	5.14"	5.14"
Usable Depth	4.20"	4.20"

Rear Cable Pass Through

Cable Opening Width	16.00"	19.00"
Cable Opening Height	3.11"	3.11"

Cable Guides

Spacing (from center)	1 RMU	1 RMU
Usable Width	1.37"	1.37"
Usable Depth	2.77"	2.77"

DEEP PANEL,

2 RMU CABLE MANAGER (30330 SERIES)

Dimension	19"W	23"W
Overall Width	19.25"	23.00"
Overall Height	3.47"	3.47"
Overall Depth	6.44"	6.44"
Usable Depth	5.50"	5.50"

Rear Cable Pass Through

Cable Opening Width	16.00"	19.00"
Cable Opening Height	1.36"	1.36"

Cable Guides

Spacing (from center)	1 RMU	1 RMU
Usable Width	1.37"	1.37"
Usable Depth	2.77"	2.77"

DEEP PANEL,

3 RMU CABLE MANAGER (30331 SERIES)

Dimension	19"W	23"W
Overall Width	19.25"	23.00"
Overall Height	5.22"	5.22"
Overall Depth	6.44"	6.44"
Usable Depth	5.50"	5.50"

Rear Cable Pass Through

Cable Opening Width	16.00"	19.00"
Cable Opening Height	3.11"	3.11"

Cable Guides

Spacing (from center)	1 RMU	1 RMU
Usable Width	1.37"	1.37"
Usable Depth	2.77"	2.77"

Cable Capacity (using 40% fill factor)				
Cable Manager Size	UTP Cable .187" Dia.	Patch Cord .250" Dia.	Fiber 3mm Dia.	Coax Cable, RG6 .400" Dia
2 RMU	140	80	360	25
3 RMU	235	133	600	50
Deep Panel, 2 RMU	184	105	475	37
Deep Panel, 3 RMU	310	175	792	66

Accessory Item

Patch Panel Wire Management Bar		
Part Number	Color	Shipping Weight
12176-701	Black	1 lb



The CPI Patch Panel Wire Management Bar provides the necessary wire management and strain relief required by ANSI/TIA/EIA-568-A. Available in 19" width, the bar attaches to the both 3" and 6" deep rack.

