

QuickPort® Stainless Steel Wallplates

APPLICATION

Leviton's single-gang and dual-gang Stainless Steel Wallplates offer field-configurable flexibility, and accept QuickPort® snap-in connectors and adapters to support a variety of commercial and residential applications. Available in several port configurations; the single-gang wallplate comes in 1-, 2-, 3-, 4- or 6-ports, and the dual-gang version comes in 2-, 4-, 6-, 8- or 12-ports. Use different colored QuickPort connectors and adapters for easy port identification.

STANDARDS COMPLIANCE

Meets or exceeds all applicable standards: cULus Listed; complies with TIA/EIA-568-B; and meets FCC Part 68.

PHYSICAL SPECIFICATIONS

Capacity: Single-gang: 1-, 2-, 3-, 4- or 6-port versions
Dual-gang: 2-, 4-, 6-, 8- or 12-port versions
Materials: Type 302 stainless steel
Dimensions: Single-gang: 4.5"H x 2.75"W x .45"D
Dual-gang: 4.5"H x 4.56"W x .45"D

DESIGN CONSIDERATIONS

- To identify ports, use different colored connectors and adapters for each application.


UNIQUE FEATURES

- Compatible with all individual QuickPort connectors and adapters
- Fits standard NEMA electrical boxes
- Individual-port configurability allows specification flexibility
- Brushed stainless steel finish

WARRANTY INFORMATION

- One-year limited product warranty and 15-year performance guarantee are standard.
- Product and performance warranties are extended to a Lifetime as part of Leviton's Certified Cabling System.

See ELECTRONIC FILES for CAD files (.DXF, .DWG, MS-DOS.EPS) on disk

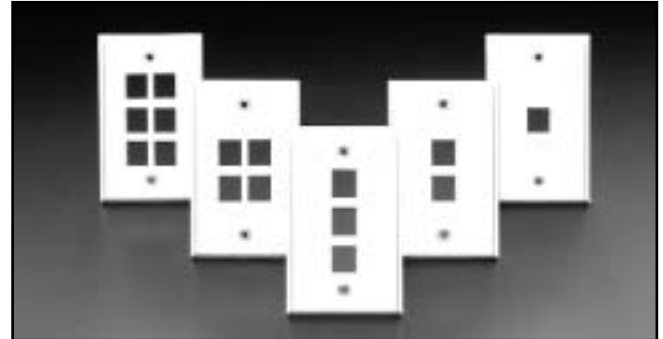

For ELECTRONIC Typical Specs see (.TXT) file on disk.

TYPICAL SPECIFICATION

Single-gang and dual-gang QuickPort Stainless Steel Wallplates shall be field-configurable, and accept snap-in connectors and adapters to support commercial and residential applications. The single-gang wallplate shall provide 1-, 2-, 3-, 4- or 6-ports, and the dual-gang wallplate shall provide 2-, 4-, 6-, 8- or 12-ports. Each wallplate shall have a brushed stainless steel finish, fit standard NEMA electrical boxes, be cULus Listed, and compliant with FCC Part 68, and TIA/EIA-568-B specifications. The manufacturer shall provide a one-year limited product warranty and a 15-year performance guarantee. The manufacturer shall provide a lifetime warranty against defects in material and workmanship, and an application guarantee when installed as part of a certified system.

QuickPort® Stainless Steel Wallplates



For Applications Engineering Support – Call 1-425-485-4288; in USA call 1-800-722-2082
Spec sheets and updates are also available at www.levitonvoicedata.com.




QuickPort® Stainless Steel Wallplates

Part Numbers
43080-xSx
43080-S12












DIMENSIONAL LINE ART

See ELECTRONIC FILES for CAD images
 (.DXF, .DWG, MS-DOS.EPS)

Single-Gang Wallplate

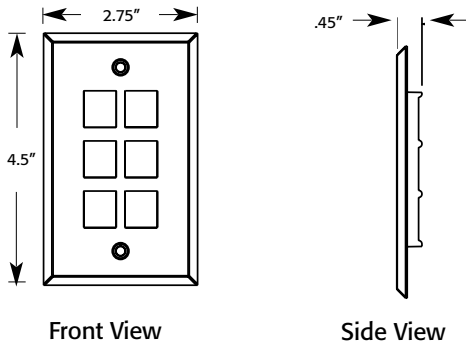

Dual-Gang Wallplate

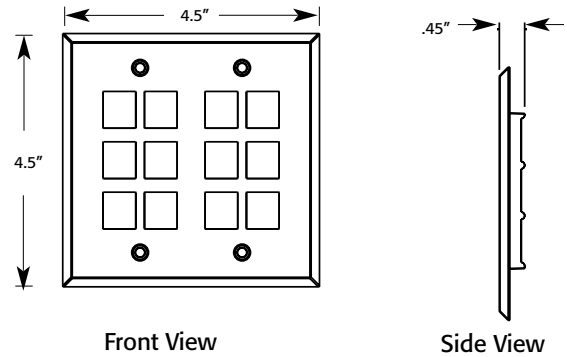

PART NUMBERS

QuickPort® Stainless Steel Wallplates	Part No.
1-Port Single-Gang Wallplate	43080-1S1
2-Port Single-Gang Wallplate	43080-1S2
3-Port Single-Gang Wallplate	43080-1S3
4-Port Single-Gang Wallplate	43080-1S4
6-Port Single-Gang Wallplate	43080-1S6
2-Port Dual-Gang Wallplate	43080-2S2
4-Port Dual-Gang Wallplate	43080-2S4
6-Port Dual-Gang Wallplate	43080-2S6
8-Port Dual-Gang Wallplate	43080-2S8
12-Port Dual-Gang Wallplate	43080-S12



For Applications Engineering Support – Call 1-425-485-4288; in USA call 1-800-722-2082.
 Spec sheets and updates are also available at www.levitonvoicedata.com.



2222 – 222nd St. SE • Bothell, WA 98021 USA • Tel: 1-800-722-2082 / 1-425-485-4288 • Fax: 1-425-483-5270 • Int'l Fax: 1-425-485-9170 • GSA# GS-35F-4785G