


Singlemode Simplex SC-ST Fiber Optic Jumper

PRODUCT SPECIFICATION

Package includes:


- A. Singlemode Simplex SC-ST
Fiber Optic Jumper, 1 pc
- B. Test Results Label, 1 pc

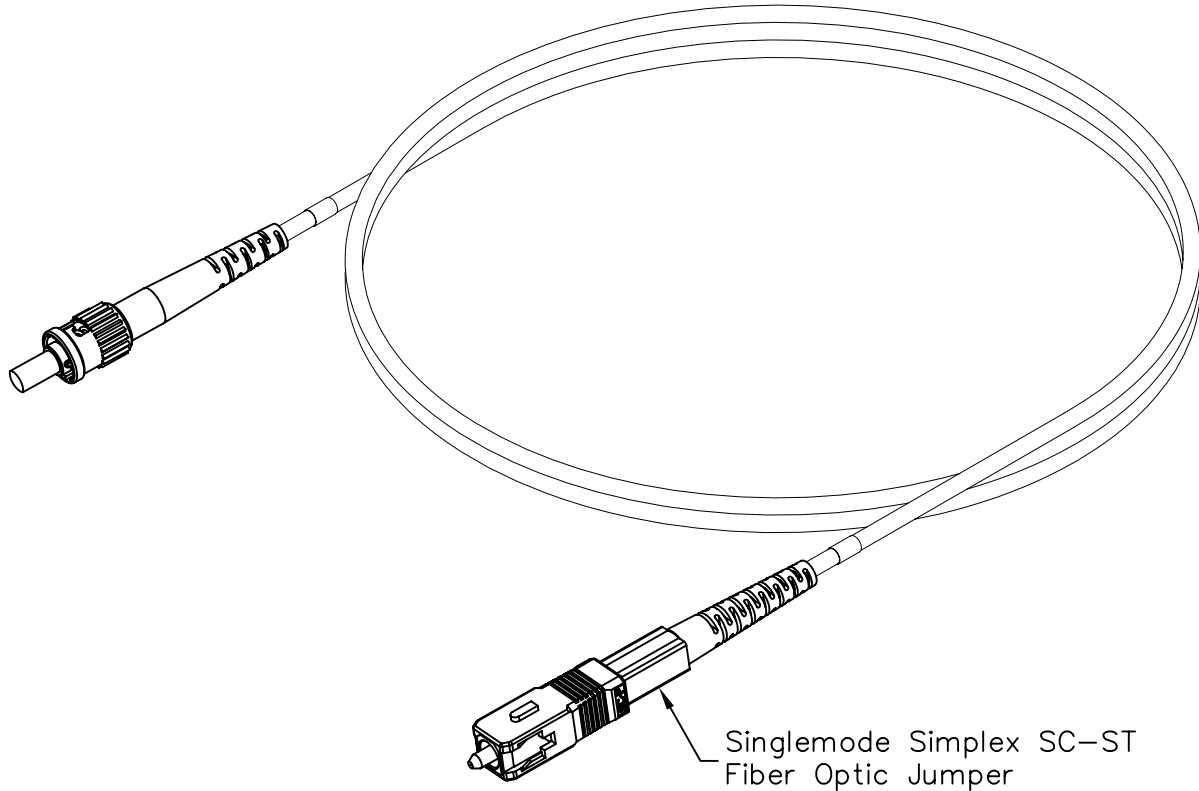


Features and Benefits:

- Made from OFNR riser rated cables, exceeding all industry requirements
- Used with ICC fiber optic products
- Available in 1, 2, 3, and 5 meters
- Test results included



JUMPER, SC-ST, SIMPLEX, SM		 ICC <i>PremiumProducts</i> <i>ProvenPerformance</i> <i>CompetitivePrices</i>	
ITEM NO.	ICFOJ9C4XX		REV. B
DWG NO.	PSFOJ9C400		PAGE NO. 1

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com



NOTE: UNLESS OTHERWISE SPECIFIED

1. CABLE:

- A. COLOR: YELLOW
- B. FIBER COUNTS: 1 FIBER
- C. FIBER TYPE: SINGLEMODE
- D. ATTENUATION: 1.0/1.0 dB/km @ 1310/1550nm
- E. BANDWIDTH: N/A
- F. CABLE DATA:
 - CABLE DIAMETER: .079 in (2.0 mm)
 - WEIGHT: 12 lb/kft
 - BEND RADIUS: 1.2 in MIN
 - LOADING: 135 lb MAX
 - IMPACT CYCLE: 1500

2. SC CONNECTOR:

- A. FERRULE: ZIRCONIA
- B. INSERTION LOSS: .2 dB TYPICAL, .3 dB MAX
- C. RETURN LOSS: 55 dB MIN
- D. UPC POLISH


3. ST CONNECTOR:

- A. FERRULE: ZIRCONIA
- B. INSERTION LOSS: .2 dB TYPICAL, .3 dB MAX
- C. RETURN LOSS: 55 dB MIN
- D. UPC POLISH

4. LENGTH: XX=01, 02, 03, & 05

ITEM NUMBER	L
ICFOJ9C401	1 METER ± 10 CM
ICFOJ9C402	2 METER ± 10 CM
ICFOJ9C403	3 METER ± 10 CM
ICFOJ9C405	5 METER ± 10 CM



JUMPER, SC-ST, SIMPLEX, SM		 Premium Products Proven Performance Competitive Prices	
ITEM NO.	ICFOJ9C4XX		REV. B
DWG NO.	PSFOJ9C400		PAGE NO. 2

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com