



OnQ DIGITAL SATELLITE MODULES

PRODUCT FACTS

- ▲ All modules support digital satellite service.
- ▲ Cost effective distribution of the CATV/off-air antenna and DBS signal over one cable.
- ▲ Ability to show satellite programming on up to 4 TVs independently.
- ▲ High performance gold fittings to ensure high-quality connections.
- ▲ Easily relocate satellite services from room to room.
- ▲ Quick and easy installation with the patented OnQ mounting system.

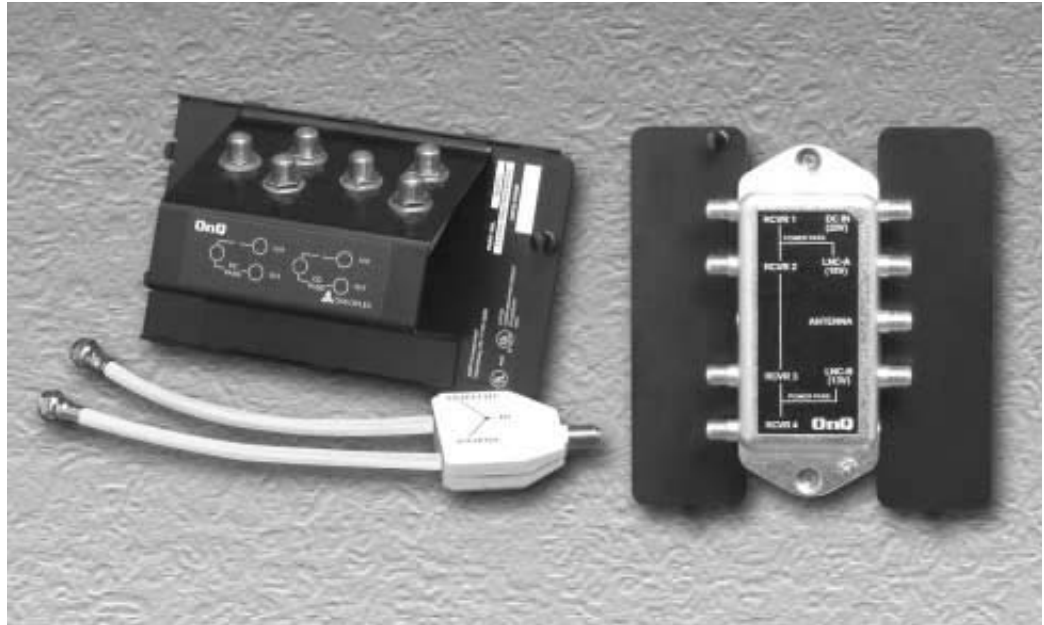

Combines 2 LNB connections from digital satellite dish with a cable TV or off-air antenna signal




Allows distribution of CATV/off air antenna and digital satellite over one cable




High-performance gold fittings ensure high-quality connections




Diplex Filter Module




Built-in diplex filter

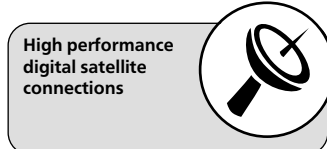


High performance digital satellite connections




Ability to show digital satellite programming on up to 4 TV's independently

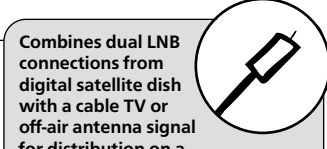

Combines dual LNB connections from digital satellite dish with a cable TV or off-air antenna signal for distribution on a single cable

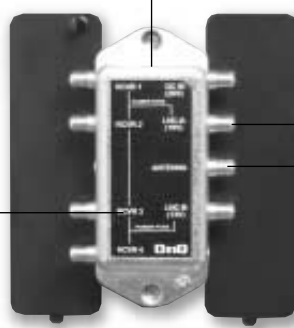

Digital Satellite 4-Way Multi Switch

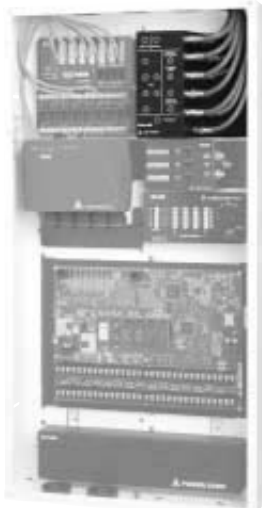

Sold by:

TWAcomm.com
<http://www.TWAcomm.com>
 Toll Free: (877) 892-2666



Diplex Filter Module

Part Number

Combines dual LNB connections from the satellite dish with a cable TV/antenna signal for distribution via a single coaxial cable to up to two receivers. 4"H x 6.5"W.

364216-01



Digital Satellite Multi Switch

364228-01

Combines dual LNB connections from the satellite dish with a cable TV or antenna signal for distribution via a single coaxial cable to up to four receivers. 6"H x 6.5"W.

Note: Consult OnQ Technical Support for satellite network service provider compatibility.



Diplex Filter Assembly

364218-01

Used at the satellite receiver to split the DBS signal and the cable TV or antenna signal from a Diplex Filter Module or Digital Satellite Multi Switch.

Replacement Products

Power Transformer — Satellite Multiswitch

20V DC, 500 mA power transformer for the Digital Satellite Multi Switch (364228-01) 364271-02

Technical Specifications

	Diplex Filter Module (364216-01)	Diplex Filter Assembly (364218-01)
Bandwidth		
Satellite	950-2050 MHz	950-2050 MHz
VHF/UHF	40-860 MHz	40-860 MHz
Insertion Loss		
Satellite	-2.8 dB Max.	-2.8 dB Max.
VHF/UHF	-1 dB Max.	-1 dB Max.
Input Return Loss		
Satellite	9 dB Min.	9 dB Min.
VHF/UHF	9 dB Min.	9 dB Min.
Stop Bank Attenuation		
VHF/UHF (950 MHz)	22 dB Min.	22 dB Min.
VHF/UHF (1.0-1.5 GHz)	38 dB Min.	38 dB Min.
Satellite (860 MHz)	25 dB Min.	25 dB Min.
Satellite (40-806 MHz)	38 dB Min.	38 dB Min.

