

# Commercial Grade

# Straight Blade Receptacles

Back and Side Wired 15 AMP 125V & 250V  
20 AMP 125V & 250V Grounding (Basic Cat. No. Denotes Brown Device\*)

DESCRIPTION	CAT. NO./COLOR 15A/125V	CAT. NO./COLOR 15A/250V	CAT. NO./COLOR 20A/125V	CAT. NO./COLOR 20A/250V
	5-15R	6-15R	5-20R	6-20R
<b>Duplex Receptacle</b>	BR15 I, W, GY, E, A	5098 I	BR20 I, W, GY, E, A	5824 I
<b>Slim Duplex Receptacle</b>	BR15-S I, W, GY, E, A	—	BR20-S I, W, GY, E, A	—
<b>Single Receptacle</b>	5088 I, A	5089 I	5891 W	5823 I



Dual Voltage Back and Side Wired  
20 AMP 125V & 20 AMP 250V Grounding (Basic Cat. No. Denotes Brown Device\*)

DESCRIPTION	CAT. NO. 20A/125V	CAT. NO. 20A/250V	COLOR* Basic Cat. No. Denotes Brown
	5-20R	6-20R	
<b>Duplex Receptacle, Dual Voltage*</b>	5844	5844	I



Dual Voltage Side Wired 15 AMP 125V & 15 AMP 250V Grounding

DESCRIPTION	CAT. NO. 15A/125V	CAT. NO. 15A/250V	COLOR* Basic Cat. No. Denotes Brown
	5-15R	6-15R	
<b>Duplex, Grounding, Dual Voltage (Triple Wipe)</b>	5031	5031	I, W

Dual Voltage Side Wired 20 AMP 125V & 20 AMP 250V Grounding

DESCRIPTION	CAT. NO. 20A/125V	CAT. NO. 20A/250V	COLOR* Basic Cat. No. Denotes Brown
	5-20R	6-20R	
<b>Duplex Receptacle, Dual Voltage (Triple Wipe)</b>	5842	5842	I

All devices are UL Listed. Also CSA Certified except where indicated by\*

## SPECIFICATIONS & FEATURES

- Large-head, triple-drive terminal screws, backed out and staked, accept No. 10 copper or copper-clad wire
- Back-wiring clamps accept up to No. 10 copper or copper-clad wire
- All power contacts are triple wipe for maximum conductivity and plug retention
- Heavy-gauge, rust-resistant steel mounting strap
- Shallow design for maximum wiring room in box
- Convenient washer-type break-off plaster ears for best flush alignment
- Captive mounting screws for fast installation
- Break-off tabs on duplex receptacles for easy two-circuit conversion

## TESTING & CODE COMPLIANCE


- UL Listed 498
- CSA Certified where applicable (File #LR-406)
- NOM Certified (#057)
- Meets or exceeds NEMA WD-1, & 6, and ANSI standards
- Backed by a Limited 10-Year Warranty

## \*COLOR

Basic Cat. Nos. shown above denote Brown color. For other color selections, add the suffix to catalog number as follows: Ivory (-I), White (-W), Black (-E), Almond (-A), Gray (-GY).

## MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2  
Operating Temperature: From -40° C (without impact) to 60° C maximum continuous

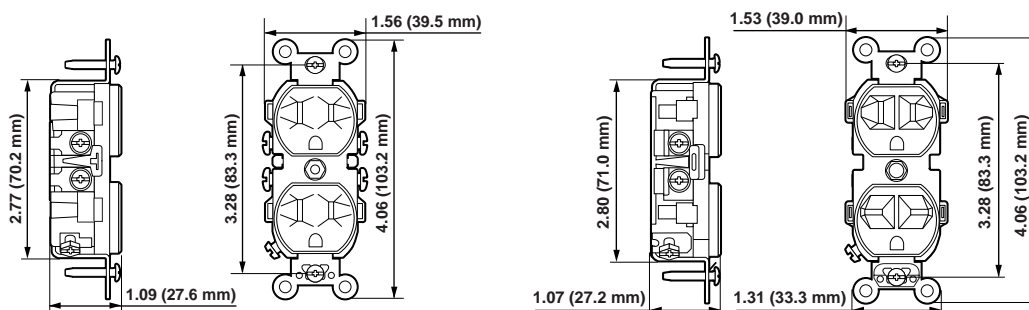

BACK & SIDE WIRED  
Cat. No. BR15

DUAL VOLTAGE  
Cat. No. 5031

