

15 Series — Taper Nose — Up to 125 AMP,* 600V



Male Detachable Plug—Set Screw (Cable Size: #8–#4)

COLOR	COMPLETE CAT. NO.	CONTACT CAT. NO.	INSULATOR CAT. NO.
Black	15D21-E	15D21-C	15SDM-48E
White	15D21-W	15D21-C	15SDM-48W
Red	15D21-R	15D21-C	15SDM-48R
Blue	15D21-B	15D21-C	15SDM-48B
Green	15D21-G	15D21-C	15SDM-48G
Yellow	15D21-Y	15D21-C	15SDM-48Y
Orange	15D21-O	15D21-C	15SDM-48O
Brown	15D21-H	15D21-C	15SDM-48H

Female Detachable Plug—Set Screw (Cable Size: #8–#4)


COLOR	COMPLETE CAT. NO.	CONTACT CAT. NO.	INSULATOR CAT. NO.
Black	15D22-E	15D22-C	15SDF-48E
White	15D22-W	15D22-C	15SDF-48W
Red	15D22-R	15D22-C	15SDF-48R
Blue	15D22-B	15D22-C	15SDF-48B
Green	15D22-G	15D22-C	15SDF-48G
Yellow	15D22-Y	15D22-C	15SDF-48Y
Orange	15D22-O	15D22-C	15SDF-48O
Brown	15D22-H	15D22-C	15SDF-48H

SPECIFICATIONS & FEATURES


- The 15 Series Taper Nose mini-cam plugs, receptacles and connectors are tough and reliable. Primary applications include carnivals and theme parks, as well as the entertainment industry

TESTING & CODE COMPLIANCE

- UL Listed E-151429
- NEMA 3R-Rated (Rainproof) for use outdoors

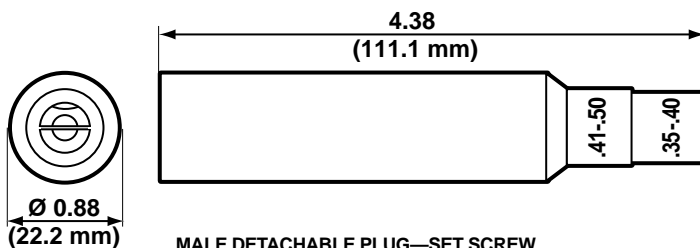

MALE DETACHABLE PLUG—SET SCREW
Cat. No. 15D21

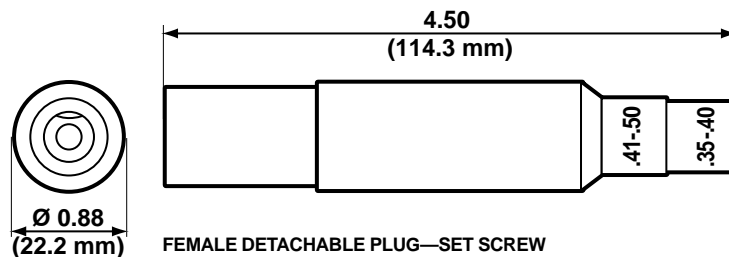

FEMALE DETACHABLE PLUG—SET SCREW
Cat. No. 15D22



*Refer to Ampacity Chart for all cable sizes on page 2