

Patch Cords

Category 3 Data Cords and Cable

- Designed for 16 Mbps UTP token ring network
- Data cords wired pin to pin with modular plugs on both ends
- UL Listed and CSA Listed

Electrical Characteristics

Requirement	256 KHz	512 KHz	772 KHz	1 Mhz	4 Mhz	10 Mhz	16 Mhz	20 Mhz
Attenuation (db/1000 Ft. at 20C)	3.4	4.6	5.7	6.5	13	22	27	31
NEXT (db/1000 Ft.)	N/A	N/A	58	56	47	41	38	36
Mutual Capacitance (at 1.0 KHz)	14.0 Pf/FT. (46PF/M)			DC Resistance: 28.6 Max per 1000 Ft. 200 C				
Impedance	At 1-25 Mhz			100 OHMS Nominal				




Part Number	Part Description	Std. Pkg. Qty.	Std. Ctn. Qty.
AT12XX-4C	6-position 4-conductor	1	1
AT12XX-6C	6-position 6-conductor	1	1
AT12XX-NK	8-position 8-conductor	1	1

XX Lengths: 01-1 ft, 03-3 ft, 05-5 ft, 07-7 ft, 10-10 ft, 15-15 ft, 25-25 ft

Note: Replace "NK" with "K" if keyed plugs are required


Category 3 Bulk Cable



Part Number	Part Description	Std. Pkg. Qty.	Std. Ctn. Qty.
AT4CRB	4-conductor bulk cable 1000 ft	1	1
AT6CRB	6-conductor bulk cable 1000 ft	1	1
AT8CRB	8-conductor bulk cable 1000 ft	1	1

Line Cord


- 4-conductor, flat, satin silver line cord

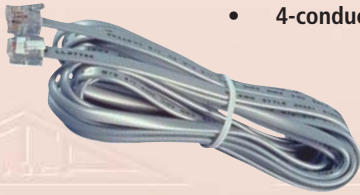

Part Number	Part Description	Std. Pkg. Qty.	Std. Ctn. Qty.
AT407	Full modular line cord 7 ft	1	400
AT414	Full modular line cord 14 ft	1	200
AT425	Full modular line cord 25 ft	1	160

Line Cord

- 6-conductor, flat, satin silver line cord



Part Number	Part Description	Std. Pkg. Qty.	Std. Ctn. Qty.
AT607	Full modular line cord 7 ft	1	300
AT614	Full modular line cord 14 ft	1	150
AT625	Full modular line cord 25 ft	1	100

Line Cord

- 8-conductor, flat, satin silver line cord. Specify either "NK" – non-keyed or "K" – keyed



Part Number	Part Description	Std. Pkg. Qty.	Std. Ctn. Qty.
AT1007-NK or K	Full modular line cord 7 ft	1	250
AT1014-NK or K	Full modular line cord 14 ft	1	150
AT1025-NK or K	Full modular line cord 25 ft	1	100