

## Seismic Frame Accessories

### VCS Vertical Cabling Section

Two aluminum cable managers, 6"W x 6.38"D (150 mm x 162 mm), attach to align with the front and rear of the rack. Large cable pass-through ports on the back of each manager align with openings in the side of the frame; spin-open plastic latches secure cables in managers. Attach two CPI Vertical Power Strips to slots on the back of the manager using the mounting kit listed below. One Single-Sided Cable Management Fingers Kit included to organize cables.



13704-703

### VCS Vertical Cabling Section Offset Bracket

Brackets attach a Single-Sided Wide VCS (P/N 11374-X03) to the Seismic Frame Two-Post Rack so that it aligns with the front of the rack. Kit includes four brackets, use two brackets per side to attach the cabling section.



13699-701

### Floor Drilling Template


Durable 28"W x 15"D (710 mm x 380 mm) aluminum template locates floor mounting holes for 19"W and 23"W Seismic Frame Two-Post Racks.



13703-701

### Concrete Floor Anchor Kit

Includes four M12 x 5-1/8" Hilti HSL-3-G Heavy Duty Sleeve Anchors to attach Seismic Frame Two-Post Rack to a concrete slab floor. Minimum recommended thickness of the concrete slab on the ground floor is 5-1/2" (140 mm). Each rack must be secured to the structural floor. Spacing between racks should be determined by a licensed structural engineer familiar with seismic applications and codes.

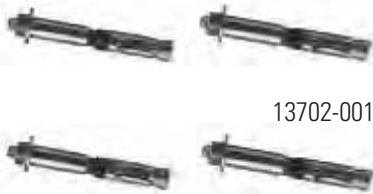

13702-001

### Vertical Power Strip Mounting Kit

Includes mounting hardware that allows two CPI Vertical Power Strips to attach to the keyholes on the sides of the Seismic Frame Two-Post Rack or the back of the Vertical Cabling Section listed above. Cannot be used on the same side as the Vertical Cabling Section or Cable Management Fingers Kit.



13697-001

### Duplex Electrical Outlet Box

Provides a location for a power connection at the base of the rack. Includes a single-gang box for a single duplex receptacle and two self-tapping Torx head T25 installation screws. Outlet box is welded steel, 3-3/4"H x 1-13/16"W x 2-1/2"D (95 mm x 46 mm x 64 mm) with a 15.5 in<sup>3</sup> (250 cm<sup>3</sup>) wiring capacity, has eight (four accessible) concentric knockouts for 1/2" or 3/4" conduit, and is zinc galvanized for corrosion protection. UL Listed.



13698-001

Part Number	Description	Shipping Weight lb (kg)
13704-X03	VCS Vertical Cabling Section, Black	35 (15.9)
13699-701	VCS Offset Mounting Bracket Kit, Black	2 (0.9)
13703-701	Floor Drilling Template, Black	6 (2.7)
13702-001	Concrete Floor Anchor Kit	3 (1.4)
13697-001	Vertical Power Strip Mounting Kit	1 (0.5)
13698-001	Duplex Electrical Outlet Box, Zinc	1 (0.5)

P/N 13704-X03 available in other colors. X=color; 1=Gray, 2=White, 7=Black.