


Series II, two-port Clarity 5E,T568A/B, 180° - OR-S225E00-99

Series II, two-port Clarity^{5E},T568A/B, 180°

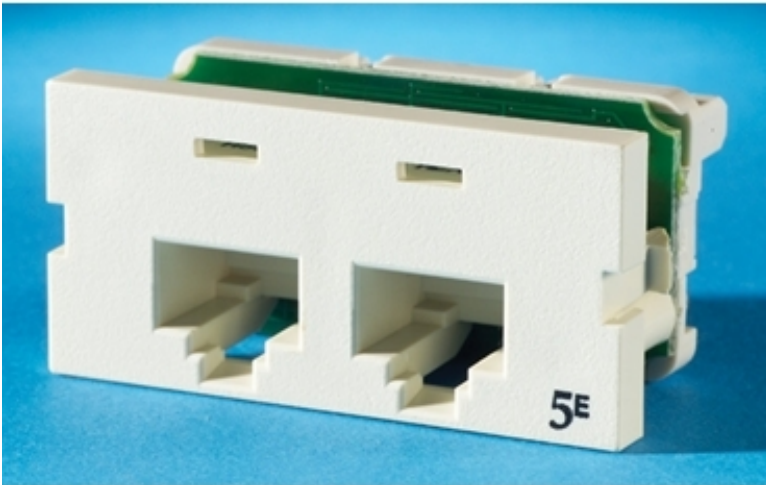

FEATURES

- ETL Verified to Category 5e component standard
- Center tuned design
- Easy lace IDC housing
- Easy to follow T568A and T568B wiring label
- Rugged Series II footprint
- Front removable
- Icon compatible, C5E Marking on jack face

BENEFITS

- Ensures standards compliance
- Transparent interface with Clarity^{5E} cords
- Reduces wiring time
- Quick, user-friendly, eliminates confusion
- Fits in all Series II faceplates and housings
- Less intrusive access for adds, moves, changes
- Supports 606 designation requirements

Specifications

DIMENSION INFO

Height Metric: 23.37 mm

Width Metric: 48.26 mm

Depth Metric: 30.48 mm

Height U S: .92"

GENERAL INFO

Category Performance Application: Category 5e/UTP

Color: Wiremold Ivory

Footprint: Series II

TECHNICAL INFO

Wire Gauge: 22-26 AWG

Category Rating: Category 5e

CONSTRUCTION INFO

Component2: Array of eight modular dual reactance contacts - Material2: Beryllium copper, Finish_Plating2: Nickel plating and a minimum of 50 micro inches of selective gold plating in contact area

Component3: IDC contacts (Low noise) - Material3: Phosphor bronze, Finish_Plating3: Nickel plating and tin lead over plate

BUY AMERICAN ACT COMPLIANCE

Country of Origin: MEXICO

Buy American Act Status: Trade Agreement Act Compliant